



RADIO TEST REPORT

ETSI EN 300 328 V2.2.2 (2019-07)

Report reference No...... : CCTI-2021120301-2E

Date of issue : Dec. 13, 2021

Total number of pages..... : 81

Testing Laboratory name..... : Shenzhen CCTI Technology Co., Ltd.

Address..... : 7th Floor, Block A, Building E, Yongwei Industrial Park, No. 118,
Yongfu Road, Qiaotou, Fuhai Street, Bao'an District, Shenzhen,
Guangdong, China

Applicant's name : ShenZhen EBELONG Technology Co., Ltd

Address..... : 4th Floor, Building No.2, Hengmingzhu shajing Industrial Park,
Xiangxing Road, Bao'an District, ShenZhen GuangDong China

Test specification

Standard..... : ETSI EN 300 328 V2.2.2 (2019-07)

Test Result : Pass

Non-standard test method : N/A

Test Report Form No...... : --

TRF Originator : CCTI testing

Master TRF : Dated 2018-03

This device described above has been tested by CCTI, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of CCTI, this document may be altered or revised by CCTI, personal only, and shall be noted in the revision of the document.

Test item description : Wireless Controller

Trademark..... : N/A

Manufacturer's name : ShenZhen EBELONG Technology Co., Ltd

Address..... : 4th Floor, Building No.2, Hengmingzhu shajing Industrial Park,
Xiangxing Road, Bao'an District, ShenZhen GuangDong China

Model and/or type reference..... : ERC2203-W
ERC2203,ERC2204,ERC2204-W,ERC2205,ERC2205-W,ERC2206,
ERC2206-W

Rating(s) : Input: 200-240V~ 50/60Hz, 1.5A, 150W


Testing procedure and testing location:

Testing Laboratory.....: **Shenzhen CCTI Technology Co., Ltd.**

Address.....: 7th Floor, Block A, Building E, Yongwei Industrial Park,
No. 118, Yongfu Road, Qiaotou, Fuhai Street, Bao'an
District, Shenzhen, Guangdong, China

Date of Test.....: Dec. 02, 2021 to Dec. 13, 2021

Tested by (name + signature).....: Peter Huang



Reviewed by (name + signature).....: Sandy Wang



Approved by (name + signature).....: Corey Mao



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen CCTI Technology Co., Ltd.

Table of Contents

Test Report Declaration	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 Test Facility	6
1.2 Measurement Uncertainty	6
2 . GENERAL INFORMATION	7
2.1 General Description Of EUT	7
2.2 Description Of Test Conditions	11
2.3 Test Conditions and Channel	11
2.4 Description Of Support Units	12
2.5 Equipments List For All Test Items	13
3 . RF OUTPUT POWER	14
3.1 Limit	14
3.2 Test Setup	14
3.3 Test Procedure	14
3.4 Test Result	15
4 . POWER SPECTRAL DENSITY	19
4.1 Limit	19
4.2 Test Setup	19
4.3 Test Procedure	19
4.4 Test Result	20
5 . ADAPTIVITY	27
5.1 Limit	27
5.2 Test Setup	27
5.3 Test Procedure	28
5.4 Test Result	30
6 . OCCUPIED CHANNEL BANDWIDTH	42
6.1 Limit	42
6.2 Test Setup	42
6.3 Test Procedure	42
6.4 Test Result	43
7 . TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	48
7.1 Limit	48
7.2 Test Setup	48
7.3 Test Procedure	49
7.4 Test Result	49
8 . RECEIVER BLOCKING	62
8.1 Limit	62
8.2 Test Setup	62
8.3 Test Procedure	62
8.4 Test Result	62

9 . SPURIOUS EMISSIONS – TRANSMITTER (30- 1000MHZ)	63
9.1 APPLIED PROCEDURES / LIMIT	63
9.1.1 Measuring Instruments and Setting	63
9.1.2 Test Procedures	63
9.1.3 Test Setup Layout	64
9.1.4 EUT Operation during Test	64
9.1.5 Results of Standby Mode Spurious Emissions	64
9.1.6 TEST RESULTS (30MHz ~ 1000MHz)	65
10 . SPURIOUS EMISSIONS – TRANSMITTER (ABOVE 1000MHZ)	67
10.1 APPLIED PROCEDURES / LIMIT	67
10.1.1 Measuring Instruments and Setting	67
10.1.2 Test Procedures	67
10.1.3 Test Setup Layout	68
10.1.4 EUT Operation during Test	68
10.1.5 Results of Standby Mode Spurious Emissions	68
10.1.6 TEST RESULTS	69
11 . SPURIOUS EMISSIONS – RECEIVER (30-1000MHZ)	73
11.1 APPLIED PROCEDURES / LIMIT	73
11.1.1 Measuring Instruments and Setting	73
11.1.2 Test Procedures	73
11.1.3 Test Setup Layout	73
11.1.4 EUT Operation during Test	73
11.1.5 TEST RESULTS (30MHz-1000MHz)	74
12 . SPURIOUS EMISSIONS – RECEIVER (ABOVE 1000MHZ)	75
12.1 APPLIED PROCEDURES / LIMIT	75
12.1.1 Measuring Instruments and Setting	75
12.1.2 Test Procedures	75
12.1.3 Test Setup Layout	75
12.1.4 EUT Operation during Test	75
12.1.5 TEST RESULTS (Above 1000MHz)	76
13 . PHOTOS OF THE EUT	77
14 . TEST PHOTOGRAPH	81

1. Summary Of Test Results

Test procedures according to the technical standards:

The following essential requirements and test specifications are relevant to the presumption of conformity under Article 3.2 of the RED Directive			
No	Test Parameter	Clause No	Results
Transmitter Parameters			
1	RF output power	4.3.2.1	PASS
2	Power Spectral Density	4.3.2.2	PASS
3	Duty Cycle, Tx-sequence, Tx-gap	4.3.2.3	N/A
4	Dwell time, Minimum Frequency Occupation & Hopping Sequence	4.3.1.3	N/A
5	Hopping Frequency Separation	4.3.1.4	N/A
6	Medium Utilisation (MU) factor	4.3.2.4	N/A
7	Adaptivity (adaptive equipment using modulations other than FHSS)	4.3.2.5	PASS
8	Occupied Channel Bandwidth	4.3.2.6	PASS
9	Transmitter unwanted emissions in the out-of-band domain	4.3.2.7	PASS
10	Transmitter unwanted emissions in the spurious domain	4.3.2.8	PASS
Receiver Parameters			
11	Receiver spurious emissions	4.3.2.9	PASS
12	Receiver Blocking	4.3.2.10	PASS
Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.			

1.1 Test Facility

Shenzhen CCTI Technology Co., Ltd.

7th Floor, Block A, Building E, Yongwei Industrial Park, No. 118, Yongfu Road, Qiaotou, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

1.2 Measurement Uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1.0 dB
Conducted emission of receivers	± 1 dB
Radiated emission of transmitter	± 6 dB
Radiated emission of receiver	± 6 dB
Temperature	± 1 degree
Humidity	± 5 %

2. General Information

2.1 General Description Of EUT

Product Name:	Wireless Controller
Model No.:	ERC2203-W
Series No.:	ERC2203,ERC2204,ERC2204-W,ERC2205,ERC2205-W,ERC2206,ERC2206-W
Model Difference:	The product is different for model number and outlook color.
Trademark:	N/A
Operation Frequency:	IEEE 802.11b:2412-2472MHz IEEE 802.11g:2412-2472MHz IEEE 802.11n HT20:2412-2472MHz
Channel numbers:	WIFI: 13 for 802.11b/802.11g/802.11n(HT20)/802.11n(HT40)
Channel separation:	WIFI : 5MHz
Modulation technology:	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)
Antenna Type:	Internal Antenna
Antenna gain:	1dBi
Hardware Version:	V2.0
Software Version:	V2.0
Power supply:	Input: 200-240V~ 50/60Hz, 1.5A, 150W
Note: The following is the wireless switch model used with the EUT. EE2454-2R,EE2411-2R,EE2254-2R,EE2211-2R,EP1454,EP1439,ES3154-1R,ES3254-1R,ES3454-2R,ES2154,ES2254,ES2354,ES2111,ES2211,ES2311,ES2100,ES2200,ES2300,EM1354,EM1360,EM1380,BM6,BM7,P1,D1,ED154,ED100.	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452	13	2472
02	2417	06	2437	10	2457		
03	2422	07	2442	11	2462		
04	2427	08	2447	12	2467		

3.

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442	10	2457		
05	2432	08	2447	11	2462		

4. Annex E

a) The type of modulation used by the equipment:

- ☐ FHSS
☒ other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment: The number of Hopping Frequencies:
- In case of Adaptive Frequency Hopping Equipment:
 The maximum number of Hopping Frequencies:
 The minimum number of Hopping Frequencies:
 The Dwell Time:
 The Minimum Channel Occupation Time:

c) Adaptive / non-adaptive equipment:

- ☐ non-adaptive Equipment
☒ adaptive Equipment without the possibility to switch to a non-adaptive mode
☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The Channel Occupancy Time implemented by the equipment: 1548.8ms

- ☐ The equipment has implemented an LBT based DAA mechanism
 - In case of equipment using modulation different from FHSS:
 - ☐ The equipment is Frame Based equipment
 - ☐ The equipment is Load Based equipment
 - ☐ The equipment can switch dynamically between Frame Based and Load Based equipment
- The CCA time implemented by the equipment: μ s
 The value q as referred to in clause 4.3.2.5.2.2.2
- ☒ The equipment has implemented a non-LBT based DAA mechanism
☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.): 15.12 dBm

The maximum (corresponding) Duty Cycle: %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power
- 802.11b
- Power Spectral Density
- 802.11b
- Duty cycle, Tx-Sequence, Tx-gap
- 802.11b
- Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)
- Hopping Frequency Separation (only for FHSS equipment)
- Medium Utilisation

- Adaptivity & Receiver Blocking

- Occupied Channel Bandwidth 802.11n(HT40)
- Transmitter unwanted emissions in the OOB domain 802.11b
- Transmitter unwanted emissions in the spurious domain 802.11b
- Receiver spurious emissions

g) The different transmit operating modes (tick all that apply):

■ Operating mode 1: Single Antenna Equipment

■ Equipment with only 1 antenna

- ☐ Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
- ☐ Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)

☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming

- ☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
- ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
- ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming

- ☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
- ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
- ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains:
- The number of Transmit chains:
 - ☐ symmetrical power distribution
 - ☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain:

NOTE: Beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2412 MHz to 2472 MHz
- Operating Frequency Range 2: 2422 MHz to 2462 MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

Occupied Channel Bandwidth : 18.86MHz

Occupied Channel Bandwidth 2: 36.65MHz

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

■ Stand-alone

☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)

☐ Plug-in radio device (Equipment intended for a variety of host systems)

Other

l) The extreme operating conditions that apply to the equipment:

Operating temperature range: -20° C to 55° C

Operating voltage range: 207V to 253V ■ AC ☐ DC

Details provided are for the: ☐ stand-alone equipment

■ combined (or host) equipment

☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

• Antenna Type

■ Integral Antenna

Antenna Gain: 0 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): dB

☐ Temporary RF connector provided

☐ No temporary RF connector provided

☐ Dedicated Antennas (equipment with antenna connector)

☐ Single power level with corresponding antenna(s)

☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels:

Power Level 1: dBm

Power Level 2: dBm

Power Level 3: dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ☐ stand-alone equipment

☒ combined (or host) equipment

☐ test jig

Supply Voltage ■ AC mains State AC voltage : 230V

☐ DC State DC voltage : ...V

In case of DC, indicate the type of power sources

☐ Internal Power Supply

■ External Power Supply or AC/DC adapter

☐ Battery: V

☐ Other:

o) Describe the test modes available which can facilitate testing:

The EUT can be into the Engineer mode for testing.


p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):

WIFI

2.2 Description Of Test Conditions

(1) EUT was tested in normal configuration (Please See following Block diagram)

1. Block diagram of EUT configuration



2.3 Test Conditions and Channel

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	-20°C ~ 55°C Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	AC230V	AC207-AC253V Note: (2)

WLAN		
Test Channel	EUT Channel(20MHz)	Test Frequency (MHz)
lowest	CH01	2412
middle	CH07	2442
highest	CH13	2472

WLAN		
Test Channel	EUT Channel(40MHz)	Test Frequency (MHz)
lowest	CH01	2422
middle	CH05	2442
highest	CH09	2462

Note:

- (1) For tests at extreme temperatures, measurements shall be made in accordance with the procedures specified in clause 5.3.4.3, at the upper and lower temperatures of the range as follow: temperature: -20°C to +55°C;

Where the manufacture's stated operating range does not include the range of -20°C to +55°C, the equipment shall be tested over the following temperature ranges:

- 0°C to +35°C for equipment intended for indoor use only, or intended for use in areas where the temperature is controlled within this range;
 - over the extremes of the operating temperature range(s) of the stated combination(s) or host equipment(s) in case of plug-in radio devices.
- (2) For the Leclanché or lithium type battery: 0.85 times the nominal voltage of the battery; for the mercury or nickel-cadmium type of battery: 0.9 times the nominal voltage of the battery.
In both cases, the upper extreme test voltage shall be 1.15 times the nominal voltage of the battery.
- (3) The measurements are performed at the highest, middle, lowest available channels.
- (4) The measurements are performed at worst mode for 1Mbps and 3Mbps.

2.4 Description Of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Controller	N/A	ERC2203-W	ERC2203,ERC2204, ERC2204-W, ERC2205, ERC2205-W, ERC2206, ERC2206-W	N/A

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in m in 『Length』 column.

中鉴检测
CCTI TESTING

2.5 Equipments List For All Test Items

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSP_40	100129	Mar. 16, 2020	Mar. 15, 2021
2	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Mar. 16, 2020	Mar. 15, 2021
3	Microflex Cable	United Microwave	57793	1m	Mar. 16, 2020	Mar. 15, 2021
4	Microflex Cable	United Microwave	A30A30-5006	10M	Mar. 16, 2020	Mar. 15, 2021
5	Horn Antenna	EMCO	3115	9605-4803	Mar. 16, 2020	Mar. 15, 2021
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Mar. 16, 2020	Mar. 15, 2021
7	Log-Bicon Antenna	MESS-ELEKTRON IK	VULB 9160	3058	Mar. 16, 2020	Mar. 15, 2021
8	Test Cable	N/A	10M_OS02	N/A	Mar. 16, 2020	Mar. 15, 2021
9	Test Cable	N/A	OS02-1/-2/-3	N/A	Mar. 16, 2020	Mar. 15, 2021
10	Pre-Amplifier	Anritsu	MH648A	M09961	Mar. 16, 2020	Mar. 15, 2021
11	Temperature & Humidity Chamber	GIANT FORCE	GTH-056P	GF-94454-1	Mar. 16, 2020	Mar. 15, 2021
12	Signal Generator	R&S	SMT 06	832080/007	Mar. 16, 2020	Mar. 15, 2021
13	Power Metter	ANRITSU	ML2487A	6K00001568	Mar. 16, 2020	Mar. 15, 2021
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	Mar. 16, 2020	Mar. 15, 2021
15	vector Signal Generator	Agilent	E4438C	MY49070163	Mar. 16, 2020	Mar. 15, 2021
16	splitter	Mini-Circuits	ZAP-50W	NN256400424	Mar. 16, 2020	Mar. 15, 2021
17	Directional Coupler	Agilent	87300C	MY44300299	Mar. 16, 2020	Mar. 15, 2021
18	vector Signal Generator	Agilent	E4438C	US44271917	Mar. 16, 2020	Mar. 15, 2021
19	X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY54080020	Mar. 16, 2020	Mar. 15, 2021
20	X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY54110001	Mar. 16, 2020	Mar. 15, 2021
21	X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY53480008	Mar. 16, 2020	Mar. 15, 2021
22	X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY54080019	Mar. 16, 2020	Mar. 15, 2021
23	4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW54063507	Mar. 16, 2020	Mar. 15, 2021
24	4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW54063513	Mar. 16, 2020	Mar. 15, 2021
25	splitter	Mini	PS3-7	4463	Mar. 16, 2020	Mar. 15, 2021
26	Signal Analyzer	Agilent	N9010A	MY48030494	Mar. 16, 2020	Mar. 15, 2021

3. RF output power

3.1 Limit


For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.3.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

Limit
20dBm

3.2 Test Setup

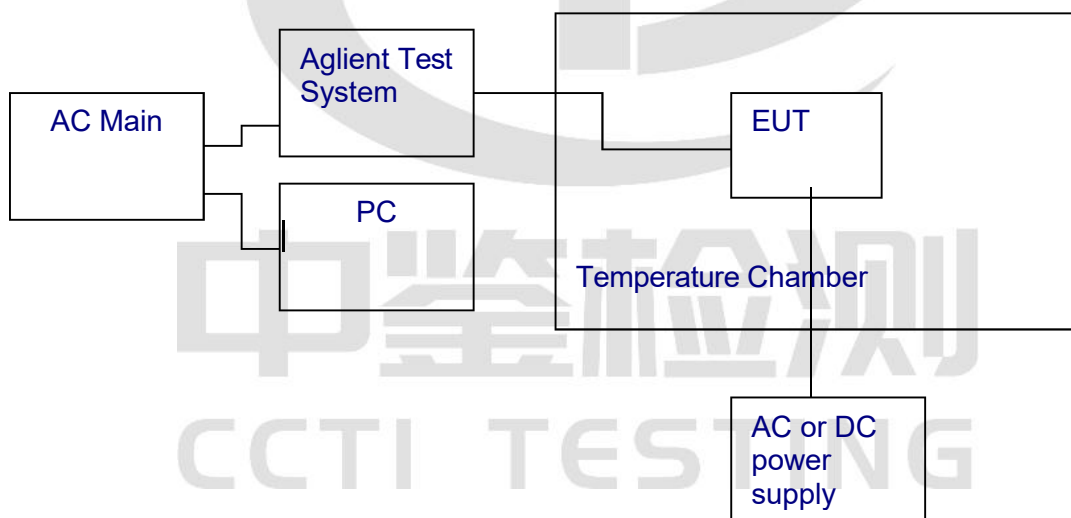

3.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.3.2.2

3.4 Test Result

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	See below
Test Mode :	TX 11B Mode CH1 / CH7 / CH13		

TEST CONDITIONS				EIRP Power (dBm)		
				CH1	CH7	CH13
T nom (°C)	25.00	V nom (V)	230	14.56	15.14	14.67
T min (°C)	-10.00	V max (V)	253	14.37	15.06	14.59
		V min (V)	203	14.46	15.08	14.64
T max (°C)	55.00	V max (V)	253	14.38	15.05	14.46
		V min (V)	203	14.48	15.12	14.57
Max Peak Power				15.12		
Limits				20dBm (-10dBW)		
Result				Complies		

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	See below
Test Mode :	TX 11G Mode CH1 / CH7 / CH13		

TEST CONDITIONS				EIRP Power (dBm)		
				CH1	CH7	CH13
T nom (°C)	25.00	V nom (V)	230	14.57	14.29	13.24
T min (°C)	-10.00	V max (V)	253	14.48	14.18	13.15
		V min (V)	203	14.43	14.25	13.17
T max (°C)	55.00	V max (V)	253	14.55	14.17	13.18
		V min (V)	203	14.53	14.13	13.15
Max Peak Power				14.55		
Limits				20dBm (-10dBW)		
Result				Complies		

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	See below
Test Mode :	TX 11B Mode CH1 / CH7 / CH13		


TEST CONDITIONS				EIRP Power (dBm)		
				CH1	CH7	CH13
T nom (°C)	25.00	V nom (V)	230	12.17	13.25	13.17
T min (°C)	-10.00	V max (V)	253	12.12	13.27	13.14
		V min (V)	203	12.06	13.15	13.14
T max (°C)	55.00	V max (V)	253	12.13	13.26	13.11
		V min (V)	203	12.16	13.13	13.07
Max Peak Power				13.28		
Limits				20dBm (-10dBW)		
Result				Complies		

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	See below
Test Mode :	TX 11N(40M) Mode CH3 / CH7 / CH11		


TEST CONDITIONS				EIRP Power (dBm)		
				CH3	CH7	CH11
T nom (°C)	25.00	V nom (V)	230	10.11	11.59	11.53
T min (°C)	-10.00	V max (V)	253	10.06	11.44	11.49
		V min (V)	203	9.98	11.46	11.45
T max (°C)	55.00	V max (V)	253	10.06	11.51	11.46
		V min (V)	203	9.94	11.56	11.38
Max Peak Power				11.58		
Limits				20dBm (-10dBW)		
Result				Complies		

Remark: This Report only show the test plots of the worst case.


Channel	Voltage	Conducted Power (dBm)	EIRP (dBm)
IEEE 802.b CH Low-2412	Normal	14.56	14.56

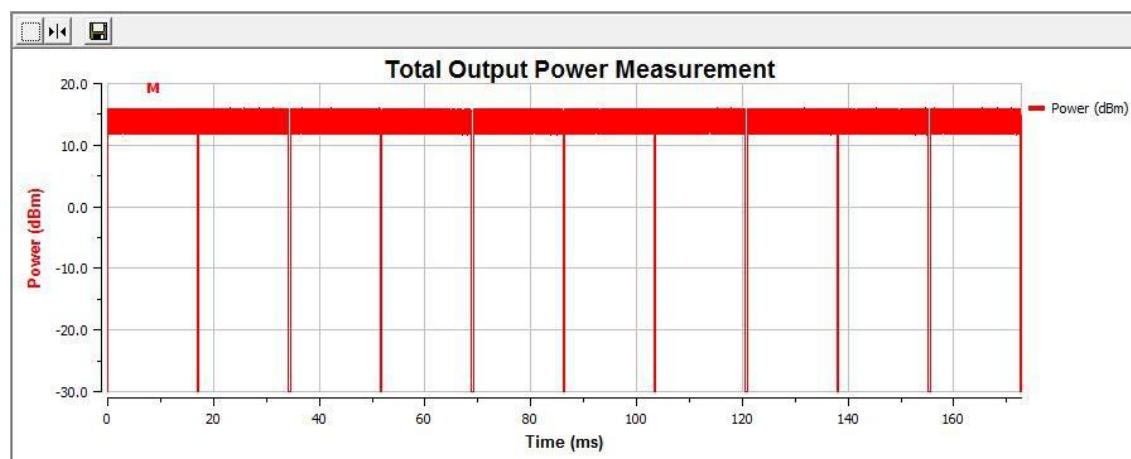

Channel	Voltage	Conducted Power (dBm)	EIRP (dBm)
IEEE 802.b CH Low-2442	Normal	15.14	15.14

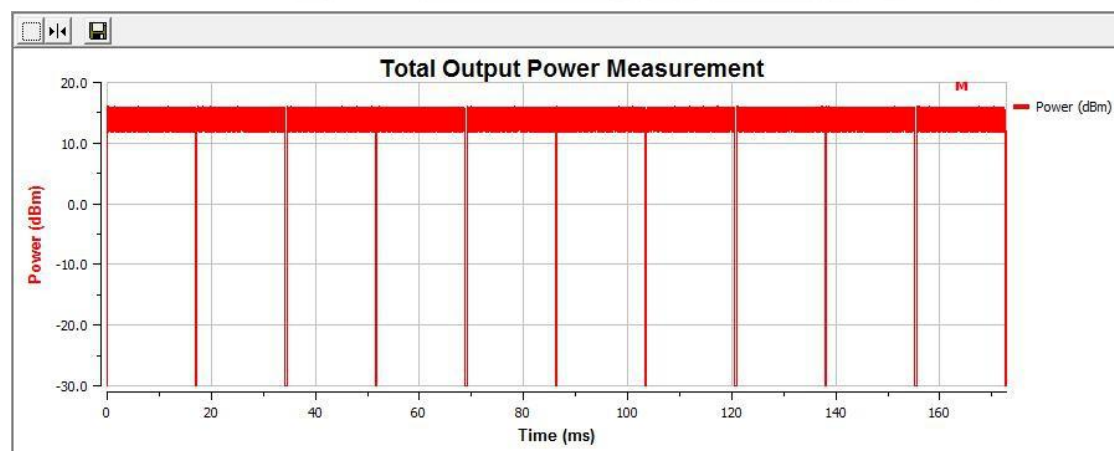

Channel	Voltage	Conducted Power (dBm)	EIRP (dBm)
IEEE 802.b CH Low-2472	Normal	14.67	14.67

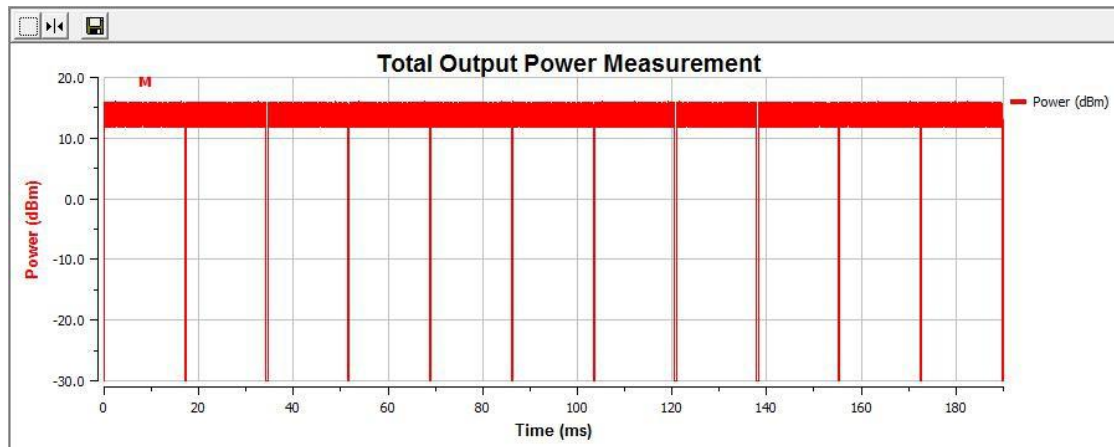

中鉴检测
CCTI TESTING

4. Power Spectral Density

4.1 Limit

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

Limit
10dBm/MHz

4.2 Test Setup



4.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.3.3

Connect the UUT to the spectrum analyzer and use the following settings:

Frequency range	2400MHz-2483.5MHz
RBW/VBW	10KHz/30KHz
Sweep points/time	>8350 / Auto
Detector	RMS
Trace	Max hold

4.4 Test Result

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage :	See below

TX 11B Mode CH1 /CH7/ CH13						
TEST CONDITIONS				EIRP Spectral Power Density (dBm/MHz)		
				CH 1	CH 7	CH 13
T nom (°C)	25.00	V nom (V)	230	6.67	6.46	6.37
Limits				10 mW/MHz		
Result				Complies		


TX 11G Mode CH1 /CH7/ CH13						
TEST CONDITIONS				EIRP Spectral Power Density (dBm/MHz)		
				CH 1	CH 7	CH 13
T nom (°C)	25.00	V nom (V)	230	2.98	2.95	2.81
Limits				10 mW/MHz		
Result				Complies		

TX 11N 20 Mode CH1 /CH7/ CH13						
TEST CONDITIONS				EIRP Spectral Power Density (dBm/MHz)		
				CH 1	CH 7	CH 13
T nom (°C)	25.00	V nom (V)	230	2.73	2.86	2.49
Limits				10 mW/MHz		
Result				Complies		


TX 11N 40 Mode CH3 /CH7/ CH11						
TEST CONDITIONS				EIRP Spectral Power Density (dBm/MHz)		
				CH 3	CH 7	CH 11
T nom (°C)	25.00	V nom (V)	230	-2.62	-2.59	-2.84
Limits				10 mW/MHz		
Result				Complies		

Test Detail - Power Spectral Density


Channel	Max Power Spectral Density Level (dBm)
802.11 B CH Low-2412	6.67

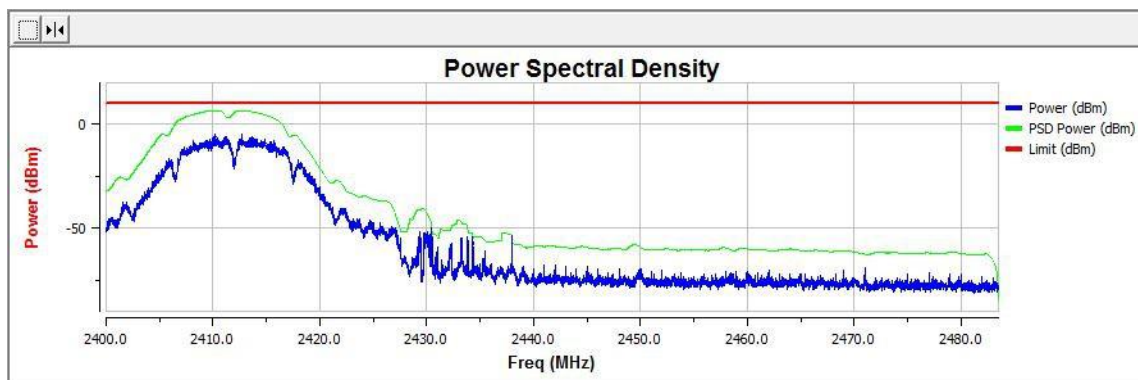


Channel	Max Power Spectral Density Level (dBm)
802.11 B CH Mid-2442	6.46

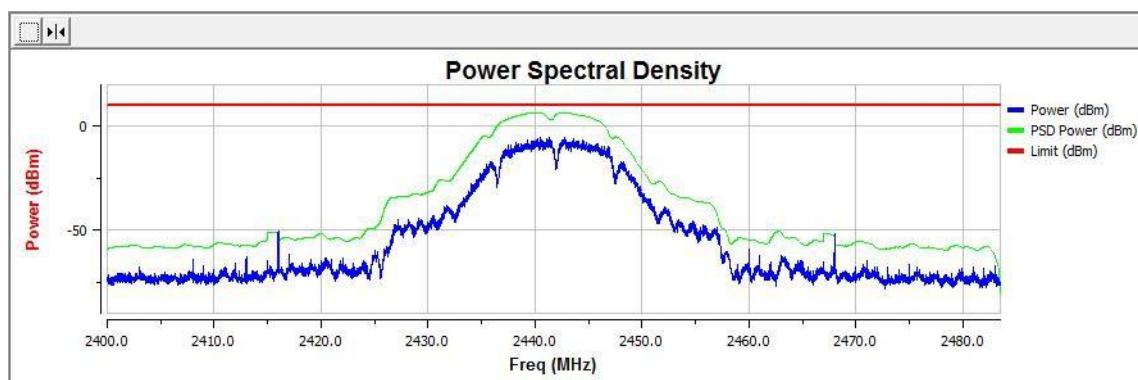


Channel	Max Power Spectral Density Level (dBm)
802.11 B CH High-2472	6.37

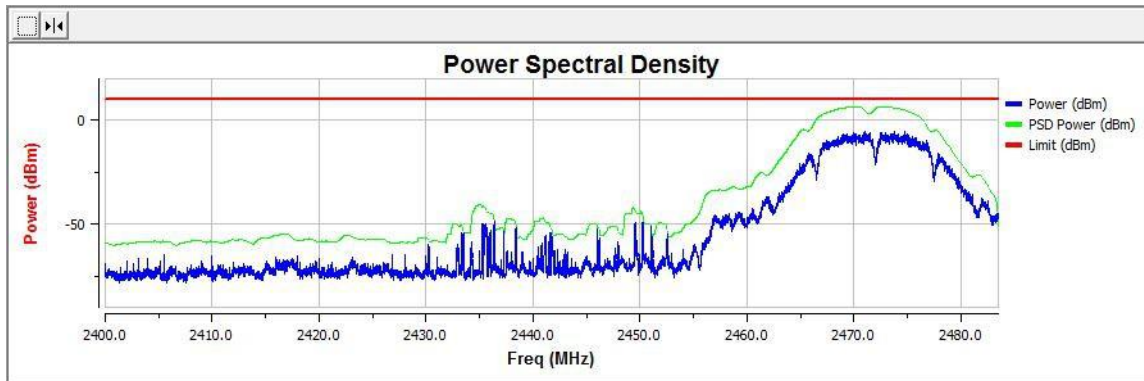


Channel	Max Power Spectral Density Level (dBm)
802.11 G CH Low-2412	2.98

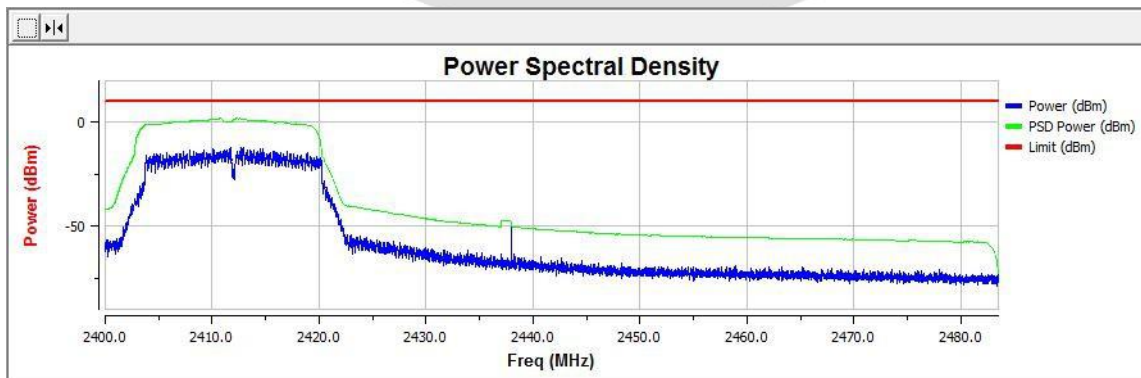


Channel	Max Power Spectral Density Level (dBm)
802.11 G CH Mid-2442	2.81

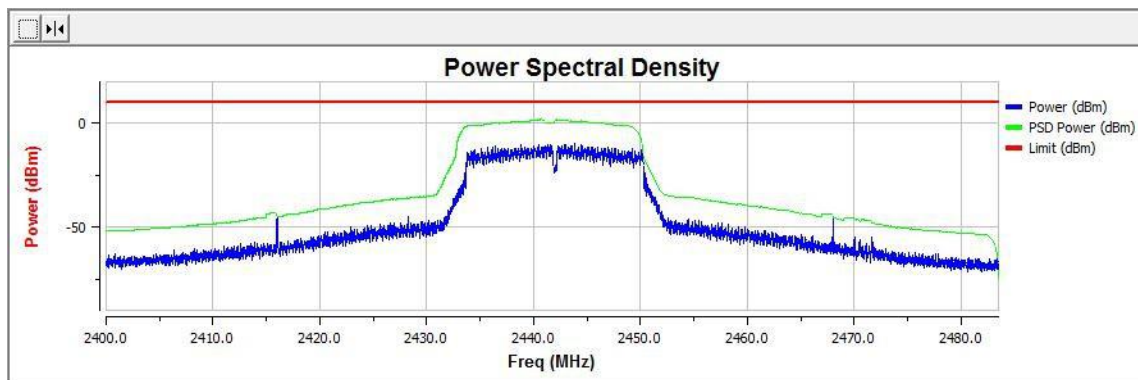


Channel	Max Power Spectral Density Level (dBm)
802.11 G CH High-2472	2.78

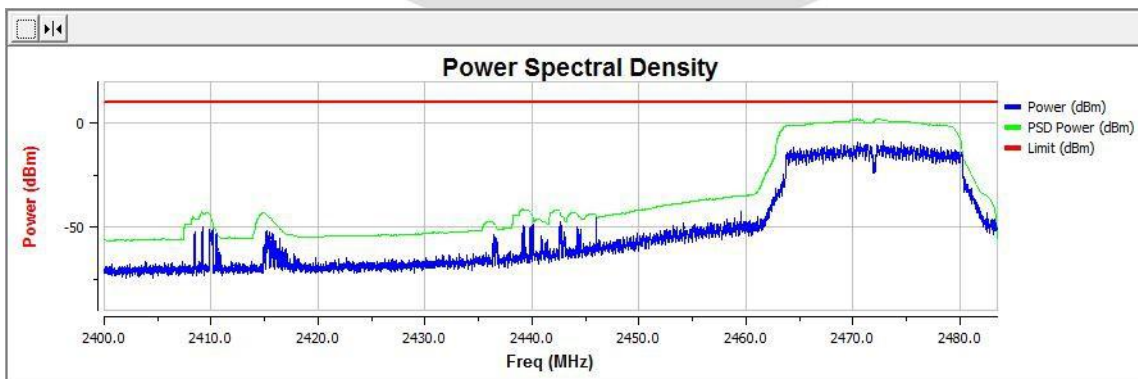


Channel	Max Power Spectral Density Level (dBm)
802.11 N20G CH Low-2412	2.73

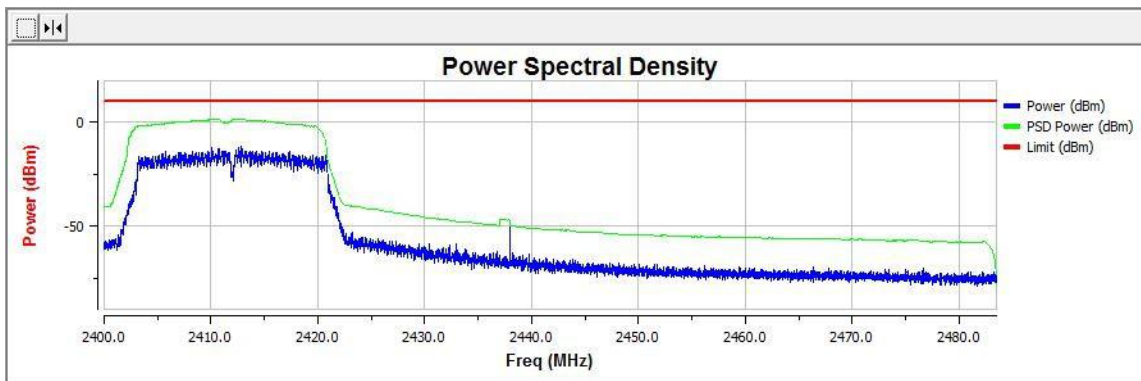


Channel	Max Power Spectral Density Level (dBm)
802.11 N20G CH Mid-2442	2.86

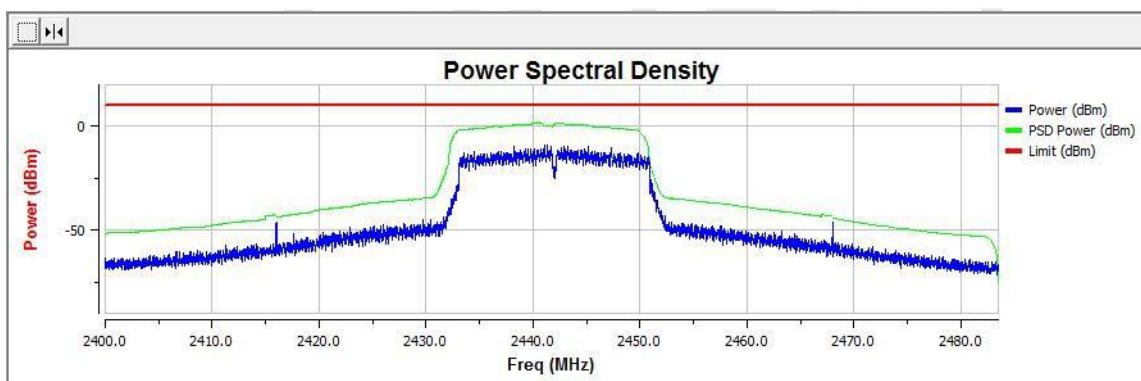


Channel	Max Power Spectral Density Level (dBm)
802.11 N20 CH High-2472	2.49

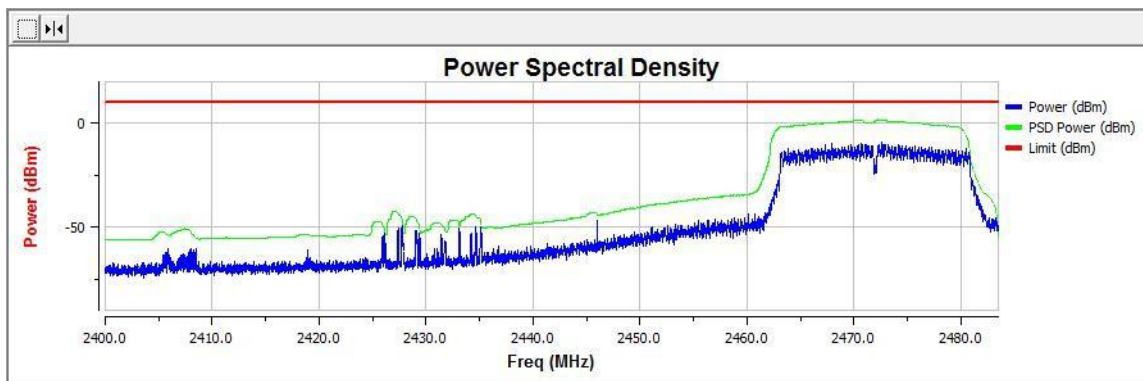


Channel	Max Power Spectral Density Level (dBm)
802.11 N40 CH Low-2422	-2.62

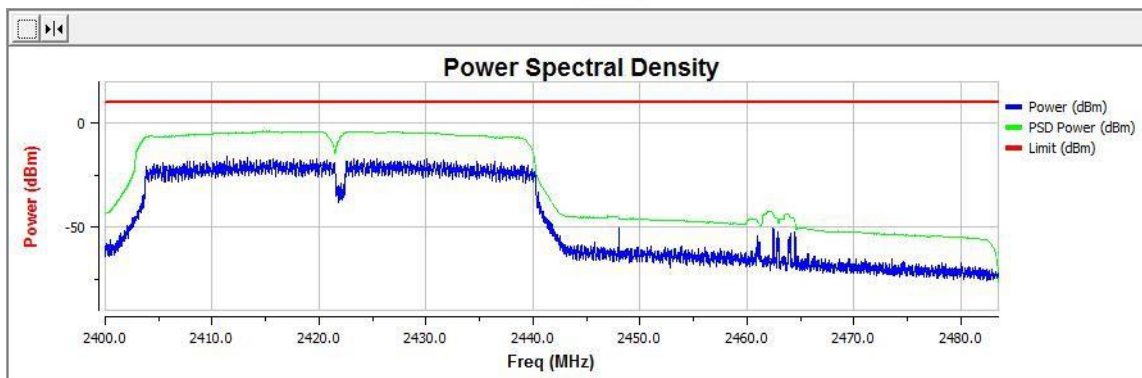

Channel	Max Power Spectral Density Level (dBm)
802.11 N40 CH Mid-2442	-2.59

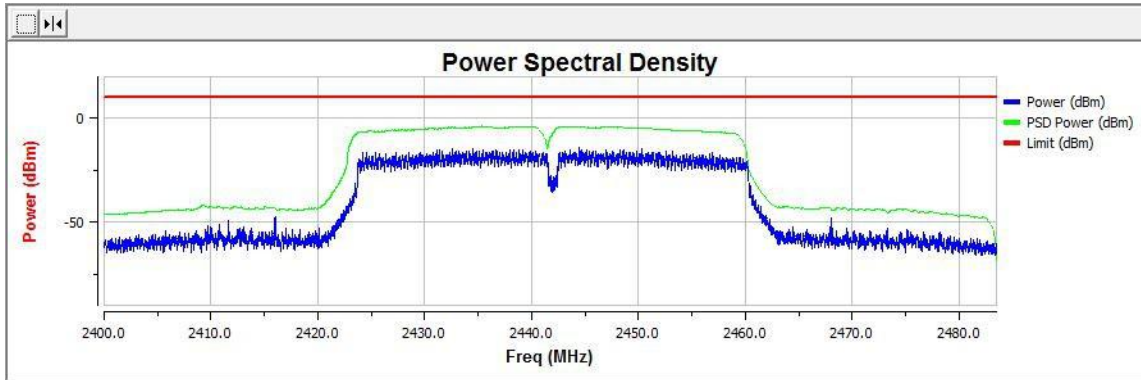

Channel	Max Power Spectral Density Level (dBm)
802.11 N40 CH High-2462	-2.84

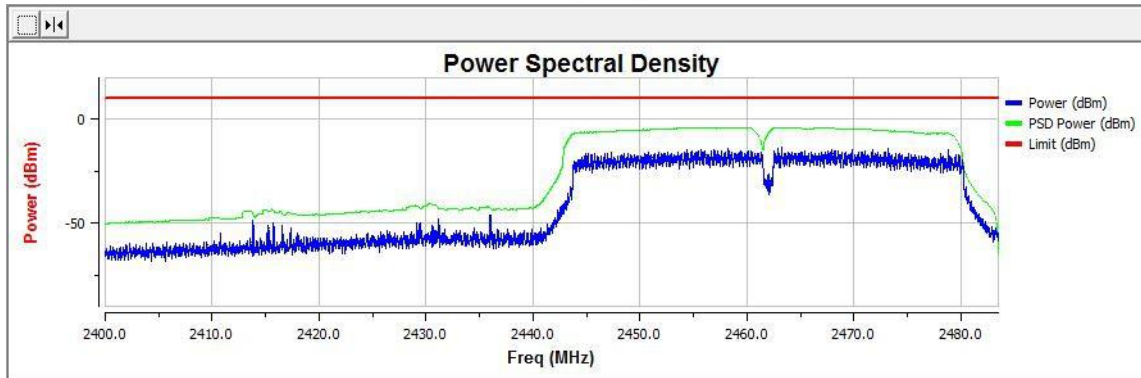

5. Adaptivity

5.1 Limit

The frequency range of the equipment is determined by the lowest and highest

Non-LBT based Detect and Avoid:

- 1 The frequency shall remain unavailable for a minimum time equal to 1 second after which the channel maybe considered again as an 'available' channel;
- 2 $COT \leq 40 \text{ ms}$;
- 3 Idle Period = 5% of COT;
- 4 Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out \text{ E.I.R.P}}$ (P_{out} in dBm);

LBT based Detect and Avoid (Frame Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 20 us; 2 CCA observation time declared by the supplier;
- 3 $COT = 1 \sim 10 \text{ ms}$;
- 4 Idle Period = 5% of COT;
- 5 Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out \text{ E.I.R.P}}$ (P_{out} in dBm);


LBT based Detect and Avoid (Load Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 20 us; 2 CCA declared by the manufacturer;
- 3 $COT \leq (13 / 32) * q \text{ ms}$; $q = [4 \sim 32]$; 1.625ms~13ms;
- 4 Detection threshold level = $-73\text{dBm/MHz} + 20 - P_{out \text{ E.I.R.P}}$ (dBm);

Short Control Signalling Transmissions:

Short Control Signalling Transmissions shall have a maximum duty cycle of 10% within an observation period of 50ms.

5.2 Test Setup

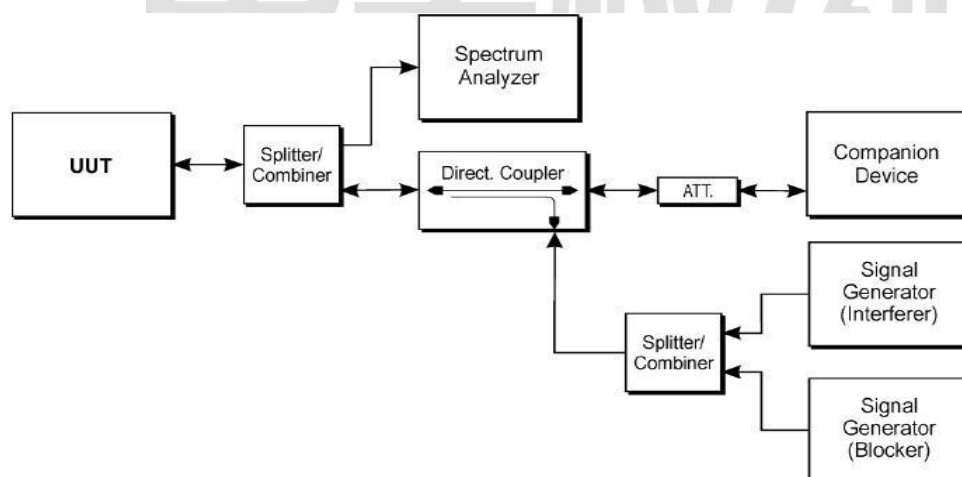

5.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.3.7.

Step 1:

The UUT may connect to a companion device during the test. The interference signal generator, the blocking signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5 although the interference and blocking signal generator do not generate any signals at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the blocking signals.

Adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table 6

The analyzer shall be set as follows:

- RBW: \geq Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)
- VBW: $3 \times$ RBW (if the analyser does not support this setting, the highest available setting shall be used)
- Detector Mode: RMS
- Centre Frequency: Equal to the centre frequency of the operating channel
- Span: 0 Hz
- Sweep time: $>$ Channel Occupancy Time of the UUT
- Trace Mode: Clear/Write
- Trigger Mode: Video

Step 2:

Configure the UUT for normal transmissions with a sufficiently high payload to allow demonstration of compliance of the adaptive mechanism on the channel being tested Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period

Step 3: Adding the interference signal

A 100 % duty cycle interference signal is injected on the current operating channel of the UUT. This interference signal shall be a band limited noise signal which has a flat power spectral density, and shall have a bandwidth greater than the Occupied Channel Bandwidth of the UUT. The maximum ripple of this interfering signal shall be $\pm 1,5$ dB within the Occupied Channel Bandwidth and the power spectral density.

Step 4: Verification of reaction to the interference signal

The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.

Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that:

The UUT shall stop transmissions on the current operating channel being tested.

Apart from Short Control Signalling Transmissions (see iii) below), there shall be no subsequent transmissions on this operating channel for a (silent) period defined in clause 4.3.2.5.1.2 step 2. After that, the UUT may have normal transmissions again for the duration of a single Channel Occupancy Time period. Because the interference signal is still present, another silent period as defined in clause 4.3.2.5.1.2 step 2 needs to be included. This sequence is repeated as long as the interfering signal is present.

The UUT may continue to have Short Control Signalling Transmissions on the operating channel while the interference signal is present. These transmissions shall comply with the limits

Alternatively, the equipment may switch to a non-adaptive mode

Step 5: Adding the blocking signal

With the interfering signal present, a 100 % duty cycle CW signal is inserted as the blocking signal. Repeat step 4 to verify that the UUT does not resume any normal transmissions

Step 6: Removing the interference and blocking signal

On removal of the interference and blocking signal the UUT is allowed to start transmissions again on this channel however, it shall be verified that this shall only be done after the period defined in clause 4.3.2.5.1.2 step 2.

Step 7:



The steps 2 to 6 shall be repeated for each of the frequencies to be tested.

5.4 Test Result

Test mode	Stop time after interfering signal(ms)	
Channel	Low	High
802.11b mode	173.21	178.77
802.11g mode	208.71	167.3
802.11n HT20 mode	208.75	167.34
802.11n HT40 mode	186.92	217.15
Remark: 1: Short Control Signalling Transmissions of adaptive equipment using wide band modulations other than FHSS shall have a maximum duty cycle of 10 % within an observation period of 50 ms.		


Short Control Signalling Transmissions						
Test mode	Channel	Channel occupancy time (ms)	Idle time (ms)	Pulse width (ms)	Maximum duty cycle(%)	Conclusion
802.11b mode	Low	1.55	0.05	1.43	2.85	Pass
	High	1.40	0.10	1.40	2.80	Pass
802.11g mode	Low	1.23	0.050	1.225	2.450	Pass
	High	1.27	0.050	1.225	2.450	Pass
802.11n HT20 mode	Low	1.23	0.050	1.225	2.450	Pass
	High	1.27	0.050	1.225	2.450	Pass
802.11n HT40 mode	Low	1.70	0.050	1.649	3.298	Pass
	High	1.65	0.050	1.649	3.298	Pass
Note: 1. Channel occupancy time must between on 1.65ms to 13.25ms 2. Idle time must longer than 20us. 3. Duty cycle=Pulse time/50ms. 4. Short Control Signalling Transmissions of adaptive equipment using wide band modulations other than FHSS shall have a maximum duty cycle of 10 % within an observation period of 50 ms. 5: The 802.11g/n20/n40 mode, EIRP is less than 10dBm, so the test not applicable.						

802.11 b Low channel	
AWGN Interference Level (dBm)	-64.17
Blocking Interference Level (dBm)	-30
Interference Start Time (ms)	173.21
Blocking Interference Start Time(ms)	223.21
Suggest q Level	4
Max COT (ms)	1.55
Idle Time (ms)	0.050
Pulse width (ms)	1.43
Duty Cycle (%)	2.85

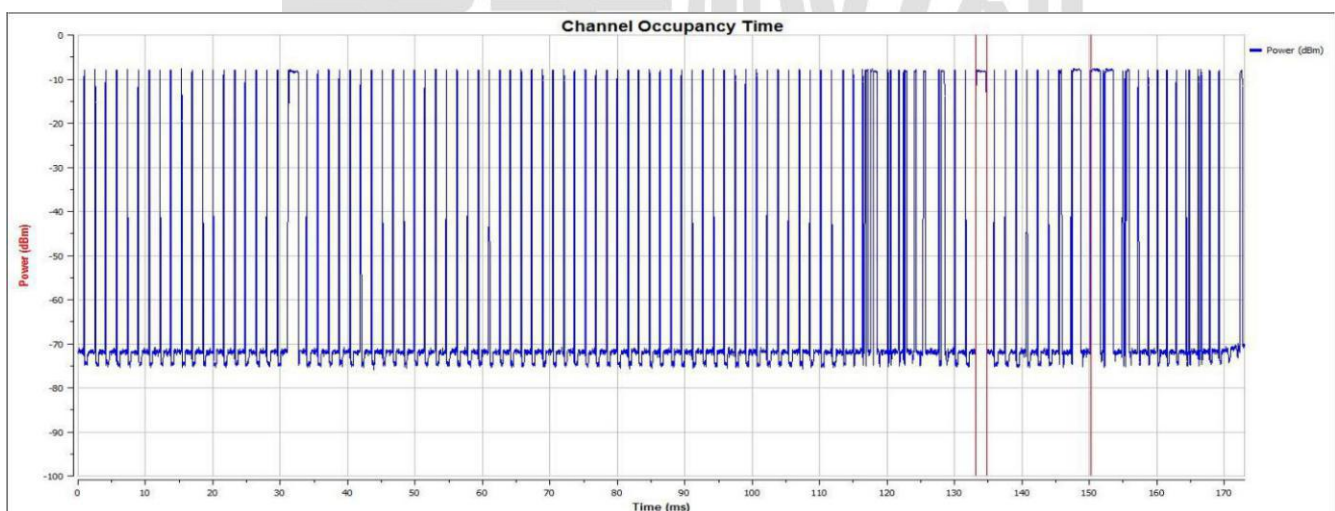
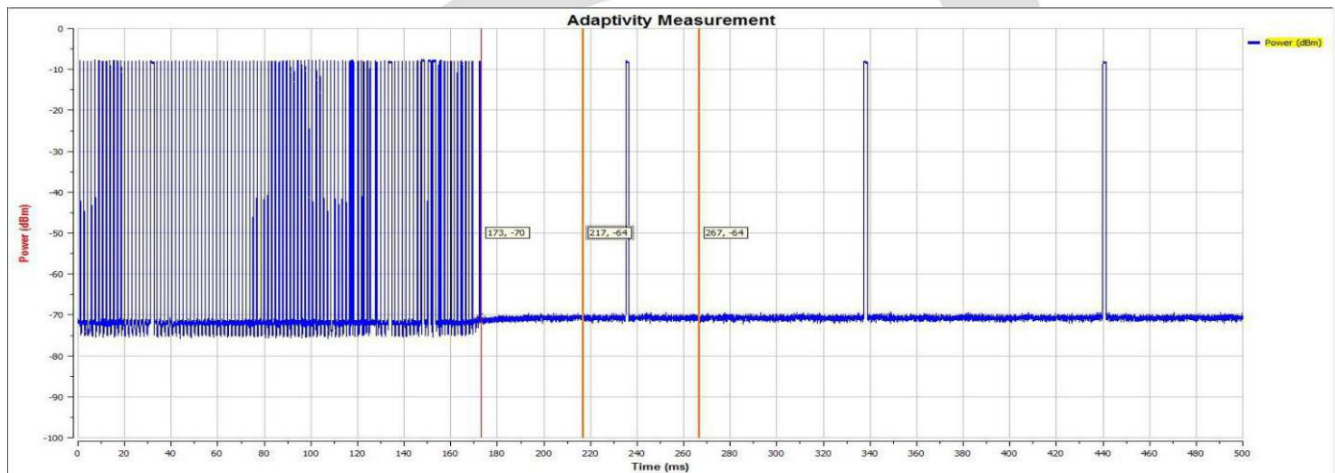


Channel Occupancy Time Info
Maximum Channel Occupancy Time (ms) : 1.55
Minimum Channel Occupancy Time (ms) : 0.00
* COT Time must between on 1.625ms to 13ms
Idle Time (us) : 50.00
* Idle Time must longer than 20us

Suggested q Number : 4
Idle Time / Max COT (%) : 3.23

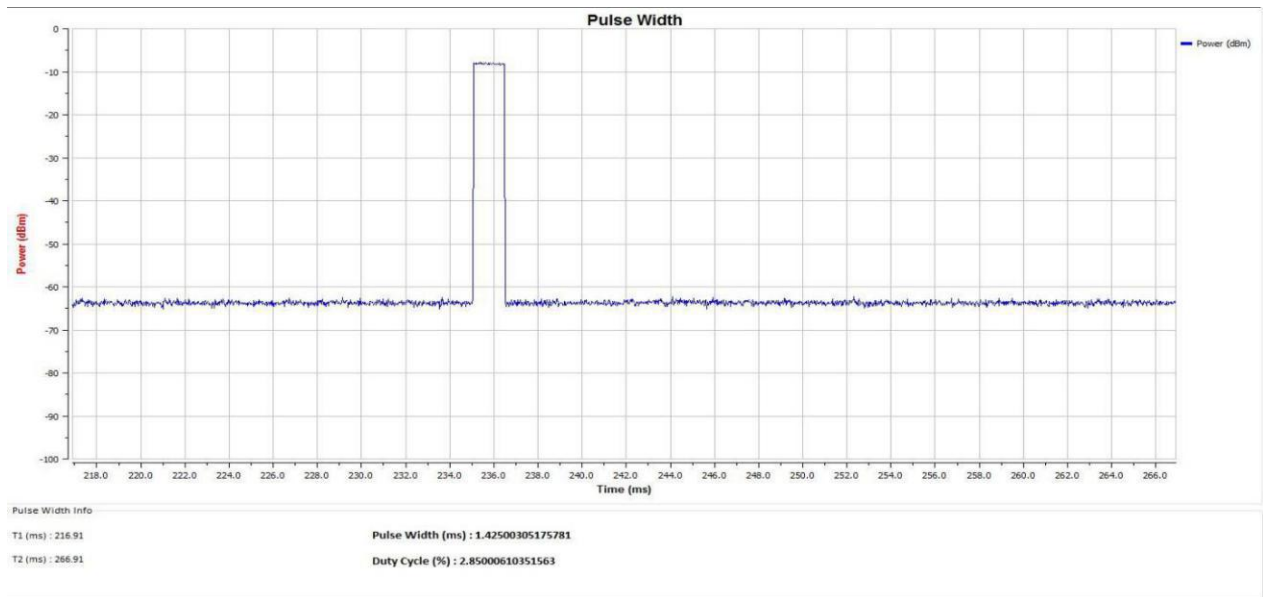


802.11 b High channel	
AWGN Interference Level (dBm)	-64.58
Blocking Interference Level (dBm)	-30
Interference Start Time (ms)	178.77
Blocking Interference Start Time(ms)	228.77
Suggest q Level	3
Max COT (ms)	1.4
Idle Time (ms)	0.10
Pulse width (ms)	1.39
Duty Cycle (%)	2.80

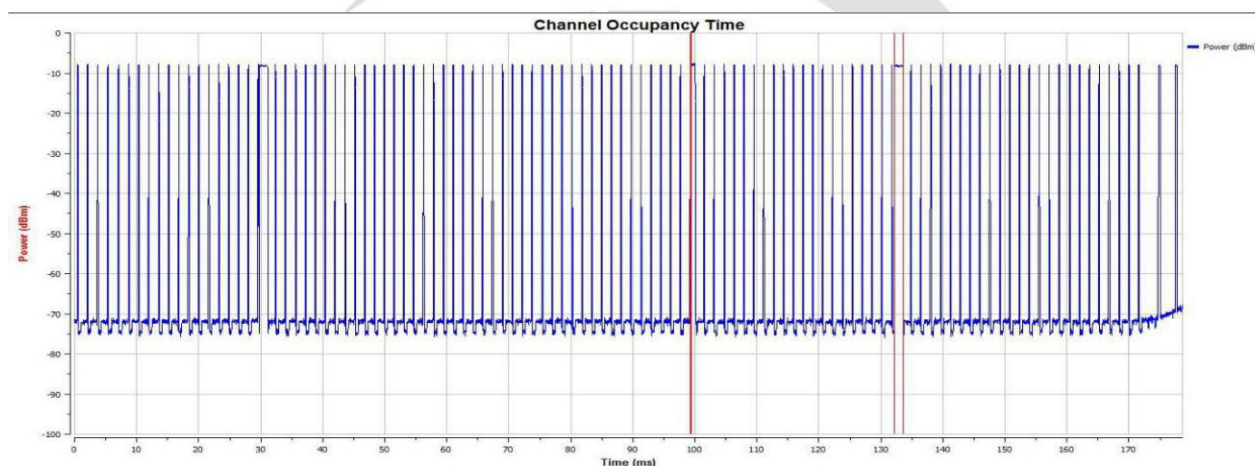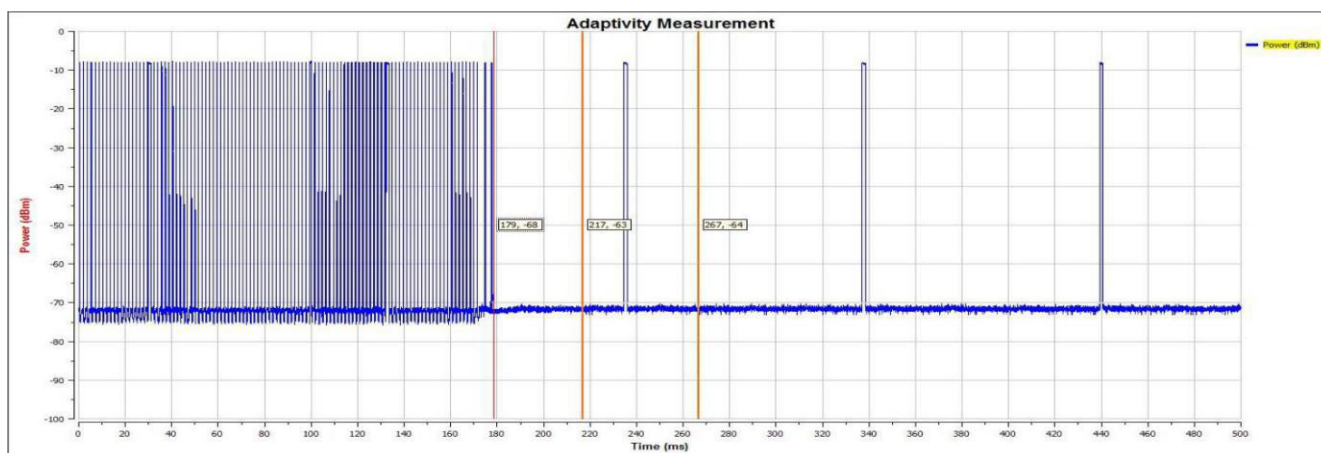

Channel Occupancy Time Info
Maximum Channel Occupancy Time (ms) : 1.40
Minimum Channel Occupancy Time (ms) : 0.00
*COT Time must between on 1.625ms to 13ms
Idle Time (us) : 100.00
*Idle Time must longer than 20us

Suggested q Number : 3

Idle Time / Max COT (%) : 7.14


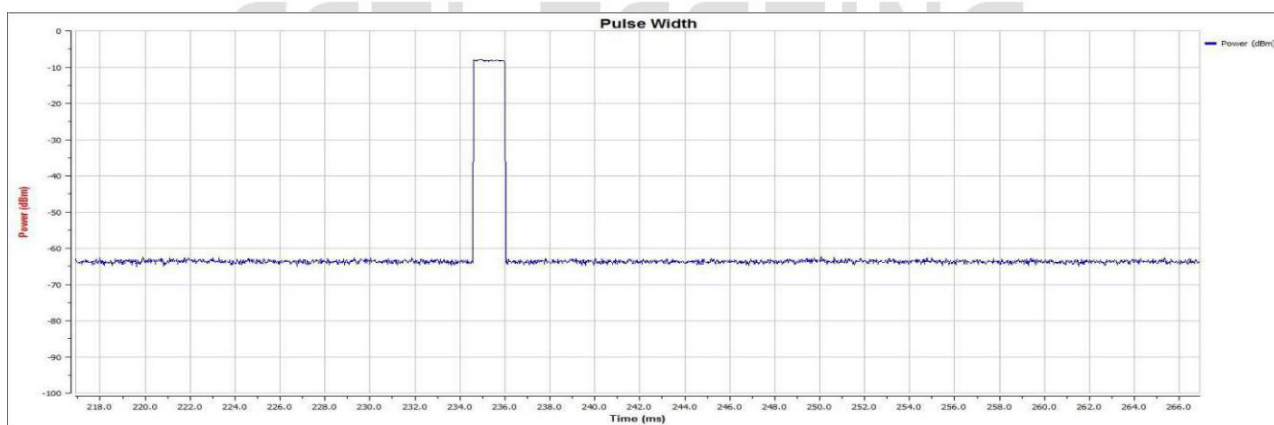



Pulse Width Info

T1 (ms) : 236.91
T2 (ms) : 266.91

Pulse Width (ms) : 1.39999389648438
Duty Cycle (%) : 2.79998779296875

802.11g Low channel	
AWGN Interference Level (dBm)	-64.47
Blocking Interference Level (dBm)	-30
Interference Start Time (ms)	208.71
Blocking Interference Start Time(ms)	258.71
Suggest q Level	3
Max COT (ms)	1.23
Idle Time (ms)	0.050
Pulse width (ms)	1.225
Duty Cycle (%)	2.450

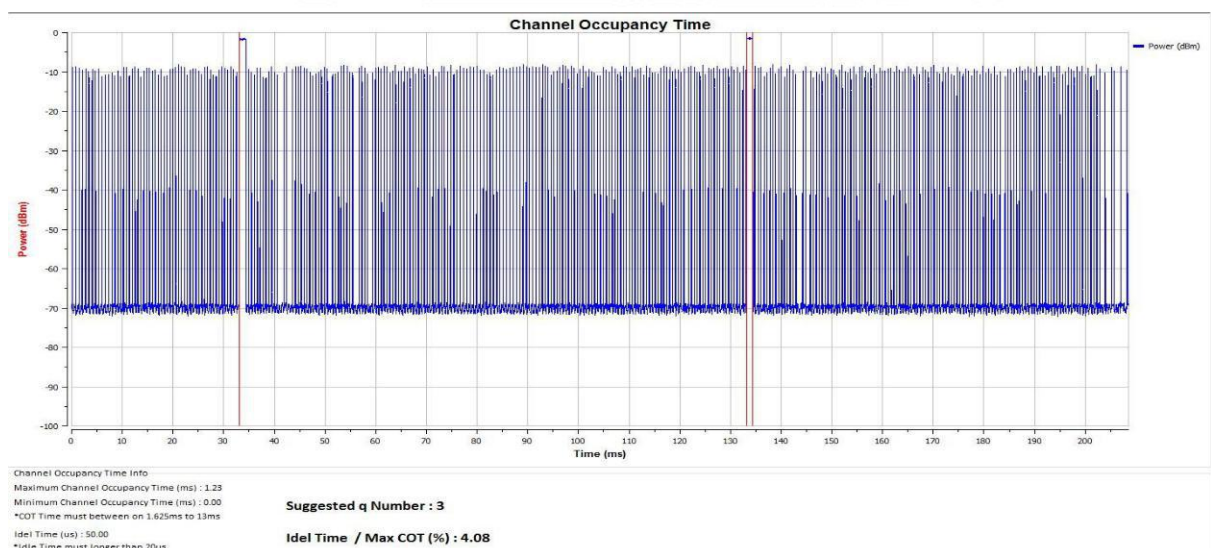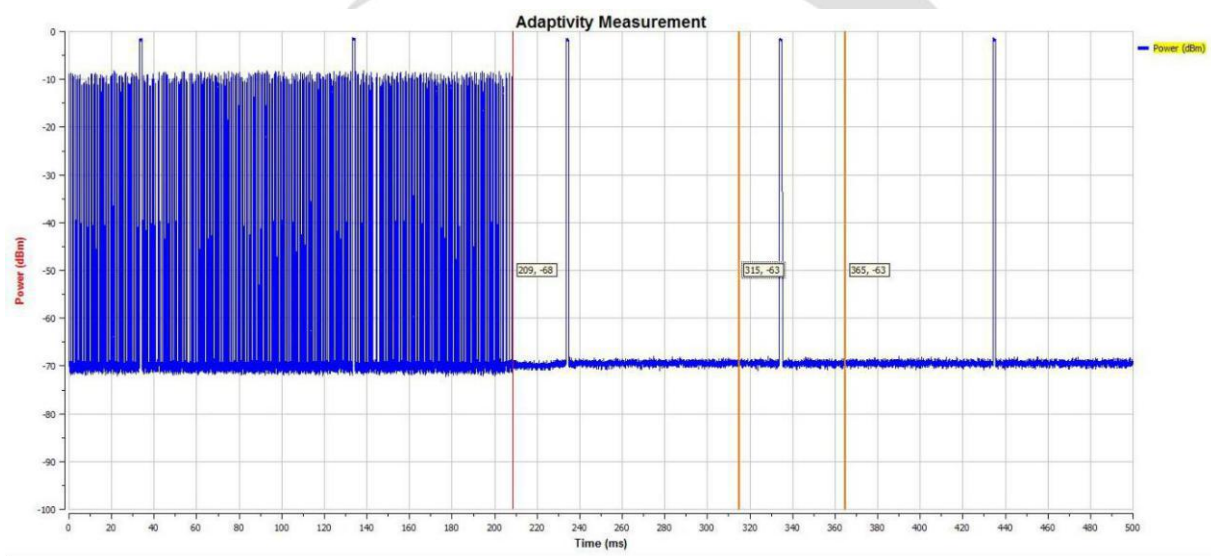

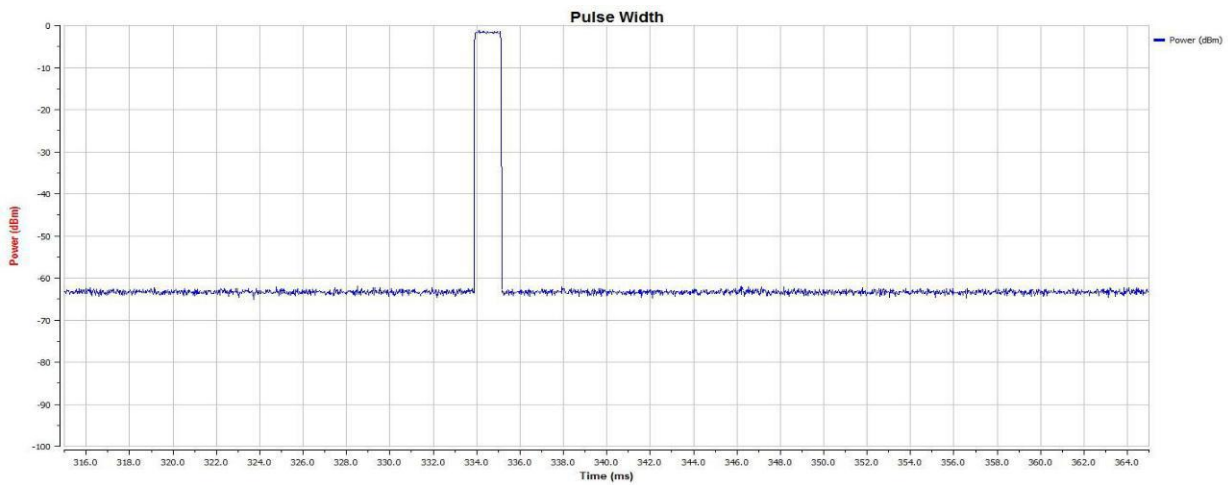

Pulse Width Info


T1 (ms) : 314.99



Pulse Width (ms) : 1.22500610351563

T2 (ms) : 364.99



Duty Cycle (%) : 2.45001220703125

802.11 g High channel	
AWGN Interference Level (dBm)	-63.14
Blocking Interference Level (dBm)	-30
Interference Start Time (ms)	167.30
Blocking Interference Start Time(ms)	217.30
Suggest q Level	3
Max COT (ms)	1.27
Idle Time (ms)	0.050
Pulse width (ms)	1.225
Duty Cycle (%)	2.450

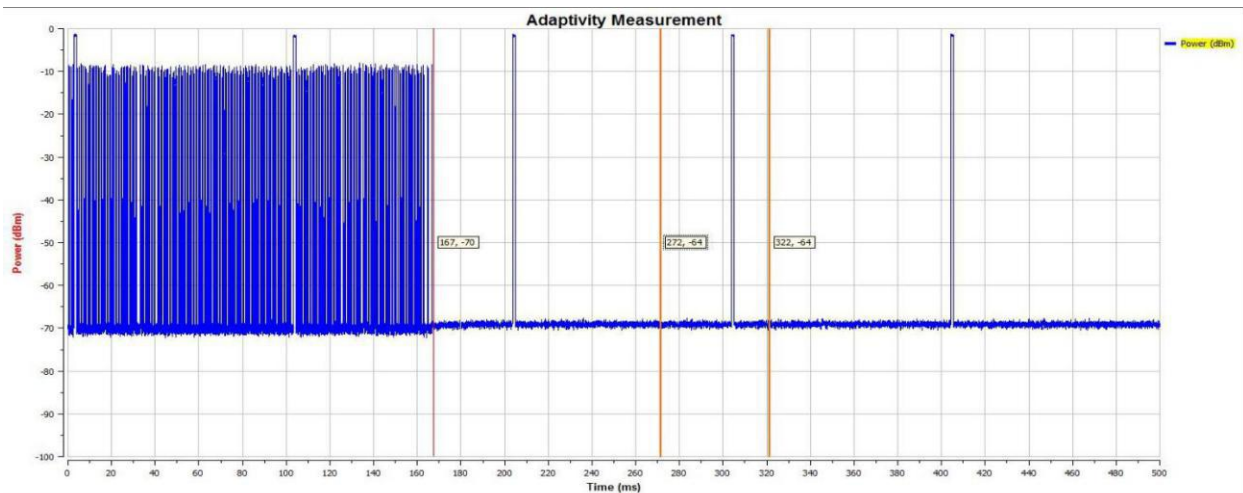

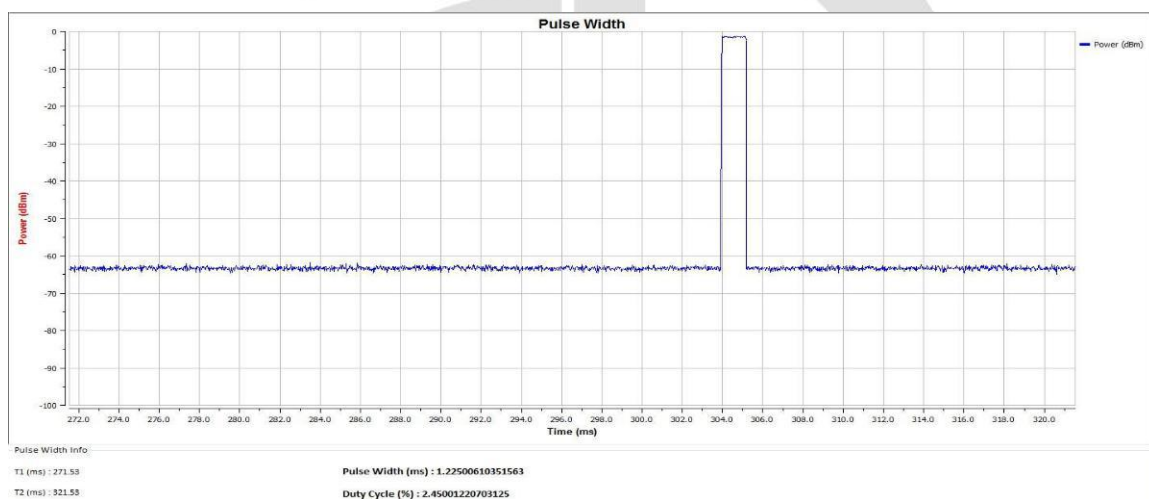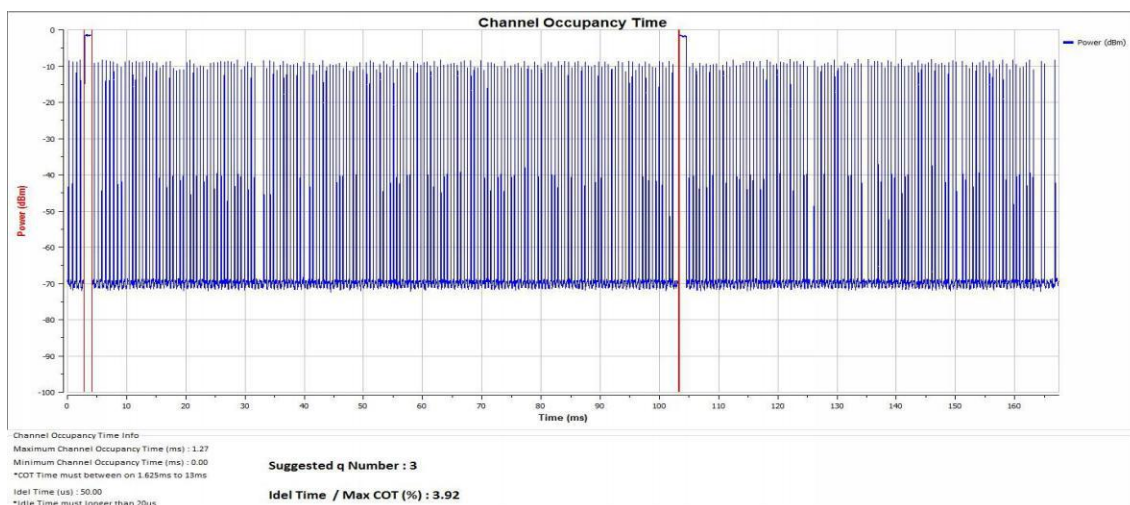


802.11n/HT20 Low channel	
AWGN Interference Level (dBm)	-62.07
Blocking Interference Level (dBm)	-30
Interference Start Time (ms)	208.75
Blocking Interference Start Time(ms)	258.75
Suggest q Level	3
Max COT (ms)	1.23
Idle Time (ms)	0.050
Pulse width (ms)	1.225
Duty Cycle (%)	2.450

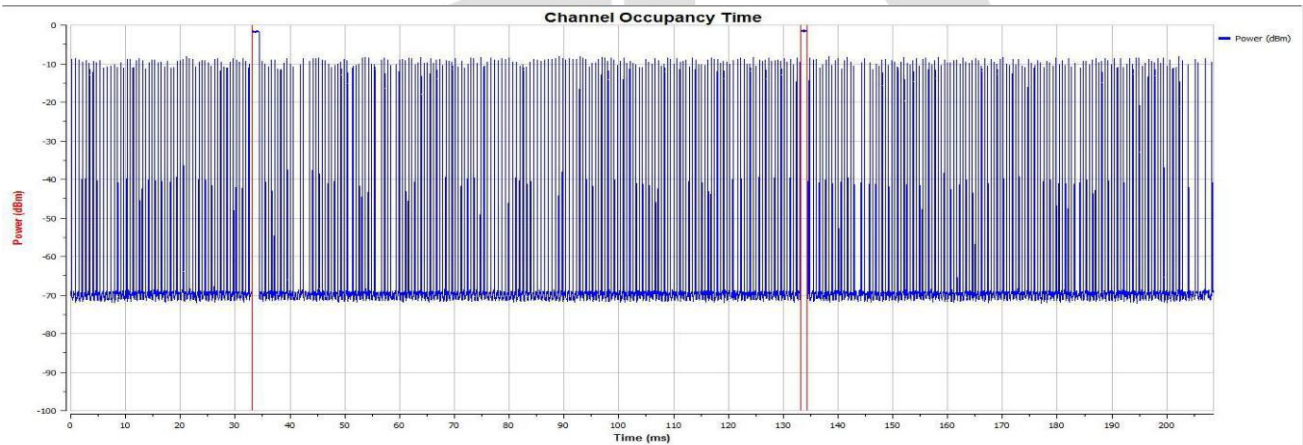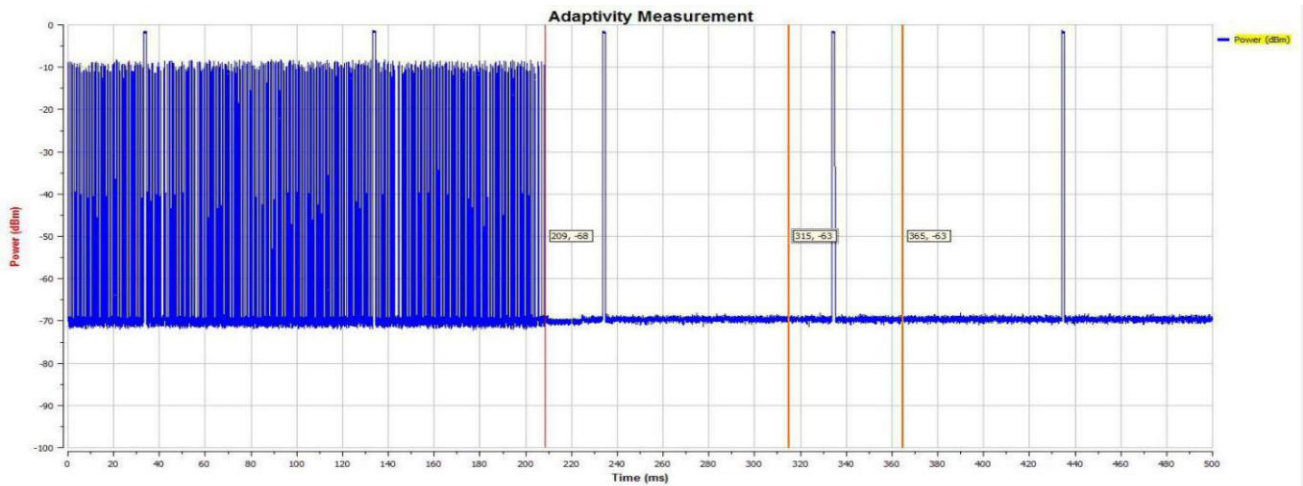

Channel Occupancy Time Info
Maximum Channel Occupancy Time (ms) : 1.23
Minimum Channel Occupancy Time (ms) : 0.00
*COT Time must between on 1.625ms to 13ms
Idle Time (us) : 50.00
*Idle Time must longer than 20us

Suggested q Number : 3

Idle Time / Max COT (%) : 4.08

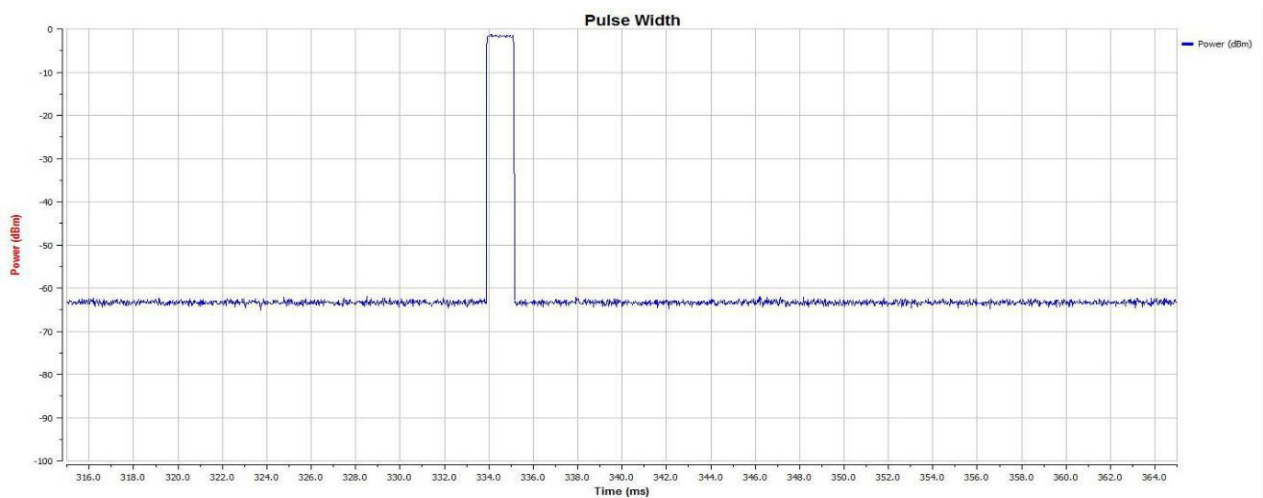



Pulse Width Info


T1 (ms) : 314.99
T2 (ms) : 364.99

Pulse Width (ms) : 1.22500610351563
Duty Cycle (%) : 2.45001220703125


802.11 n/HT20 High channel


AWGN Interference Level (dBm)	-63.06
Blocking Interference Level (dBm)	-30
Interference Start Time (ms)	167.34
Blocking Interference Start Time(ms)	217.34
Suggest q Level	3
Max COT (ms)	1.27
Idle Time (ms)	0.050
Pulse width (ms)	1.225
Duty Cycle (%)	2.450

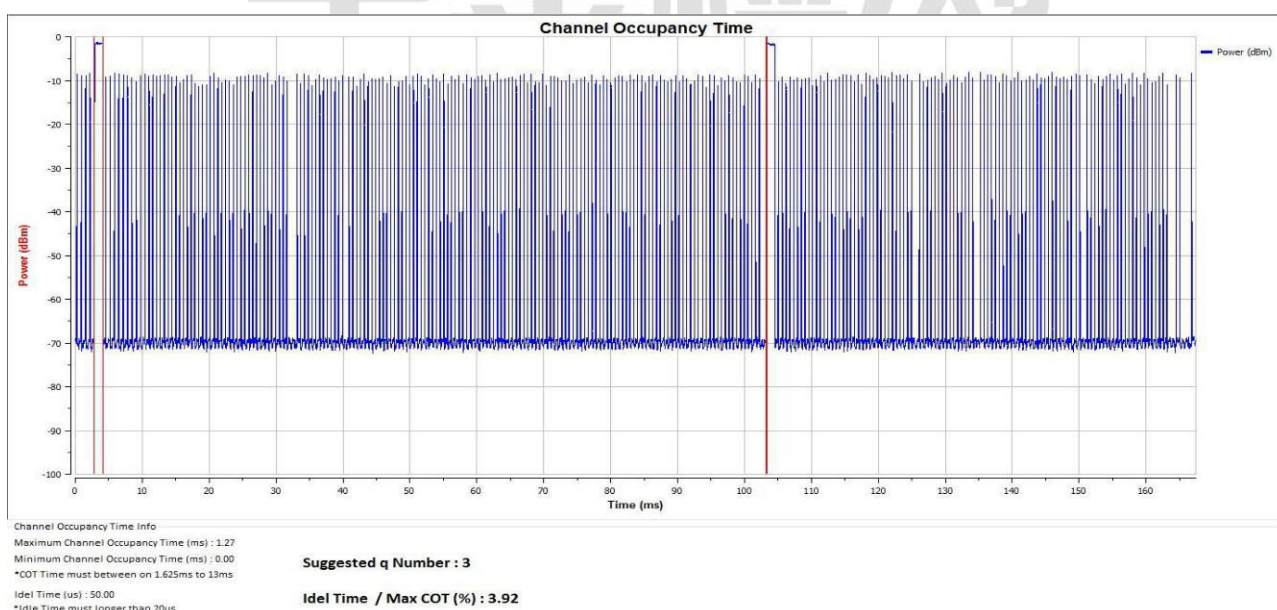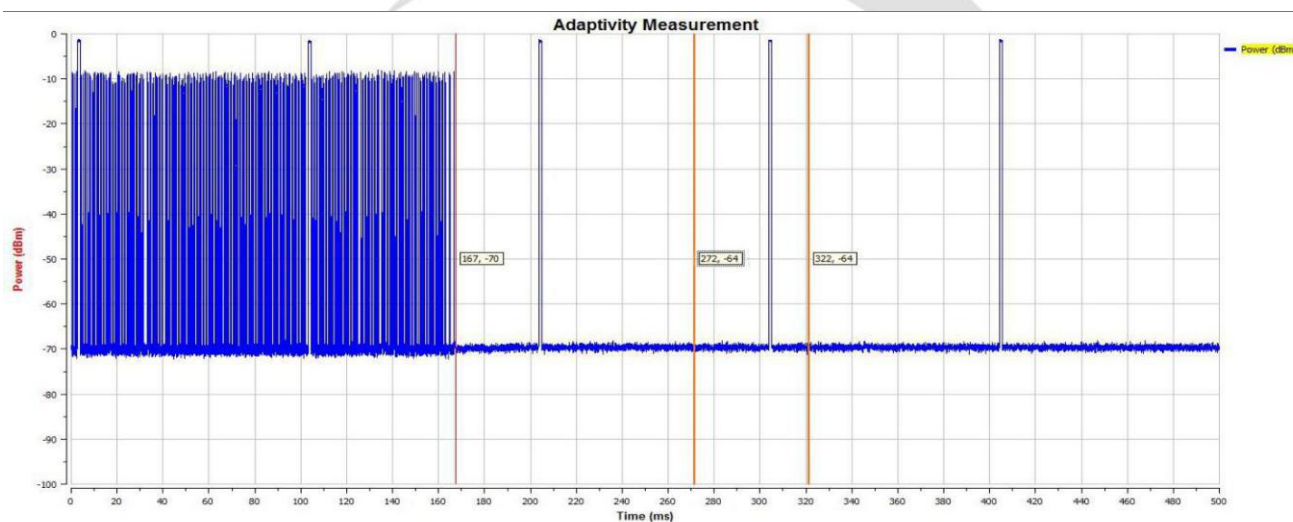

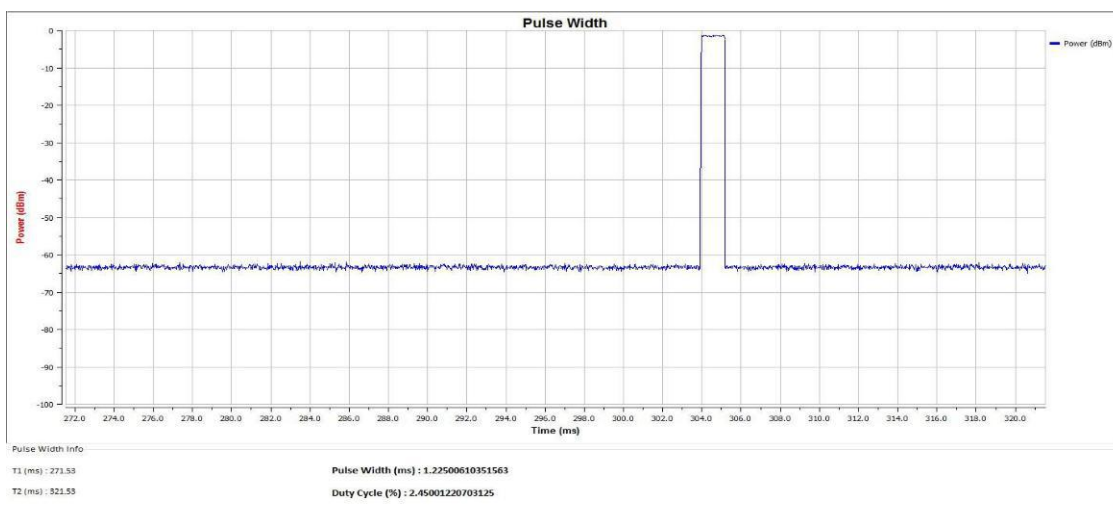

802.11 n40 Low channel	
AWGN Interference Level (dBm)	-60.01
Blocking Interference Level (dBm)	-30
Interference Start Time (ms)	186.92
Blocking Interference Start Time(ms)	236.92
Suggest q Level	4
Max COT (ms)	1.70
Idle Time (ms)	0.050
Pulse width (ms)	1.649
Duty Cycle (%)	3.298

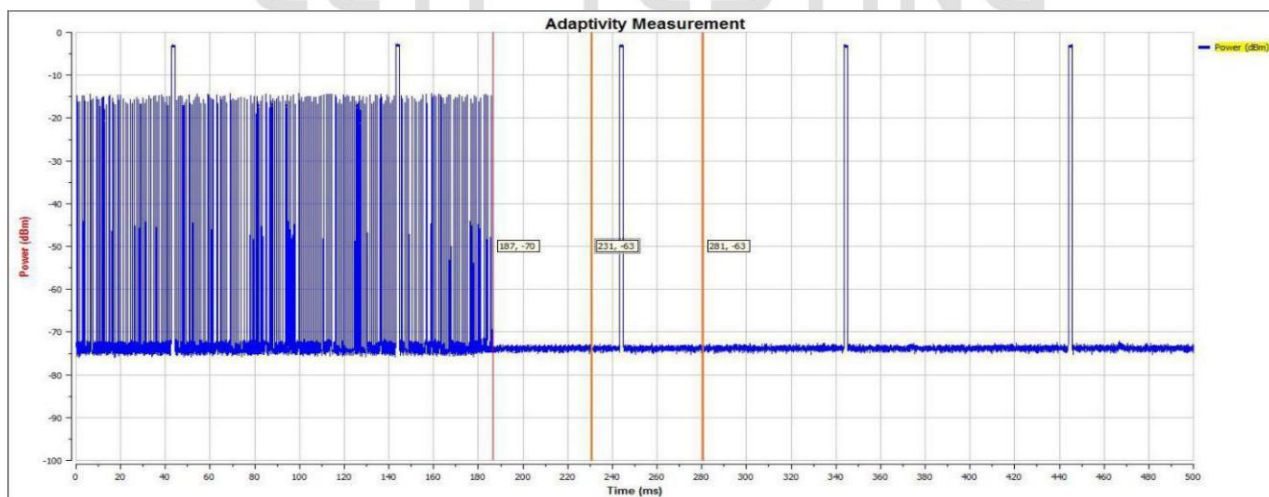


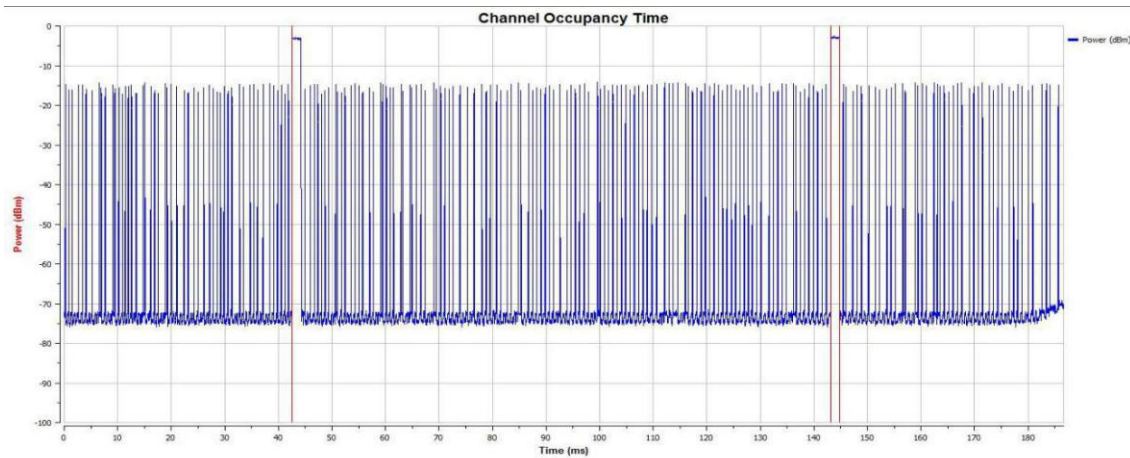

Channel Occupancy Time Info
Maximum Channel Occupancy Time (ms) : 1.70
Minimum Channel Occupancy Time (ms) : 0.00
* COT Time must be between on 1.625ms to 13ms
Idle Time (us) : 50.00
* Idle Time must longer than 20us

Suggested q Number : 4



Idle Time / Max COT (%) : 2.94

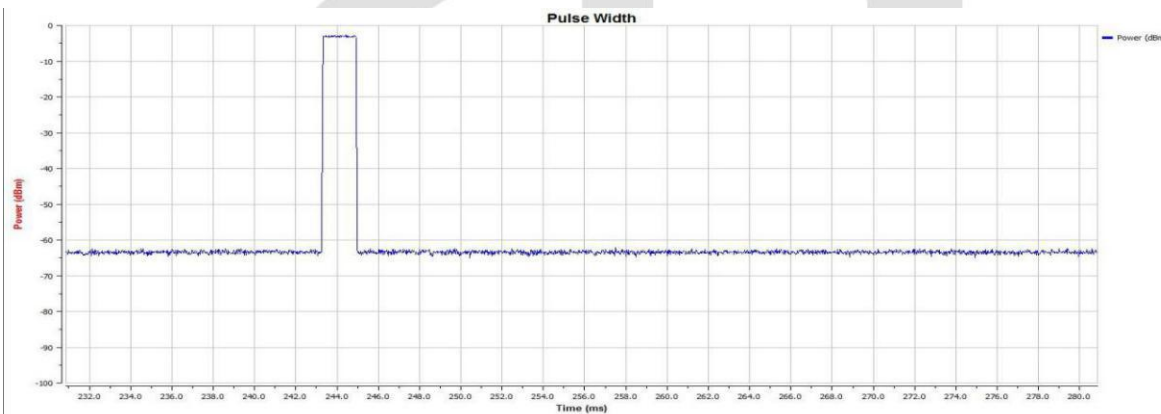

Pulse Width Info
T1 (ms) : 230.86
T2 (ms) : 280.86

Pulse Width (ms) : 1.64999389648438
Duty Cycle (%) : 3.29998779296875


802.11 n40 High channel	
AWGN Interference Level (dBm)	-61.48
Blocking Interference Level (dBm)	-30
Interference Start Time (ms)	217.75
Blocking Interference Start Time(ms)	267.75
Suggest q Level	4
Max COT (ms)	1.65
Idle Time (ms)	0.050
Pulse width (ms)	1.649
Duty Cycle (%)	3.298

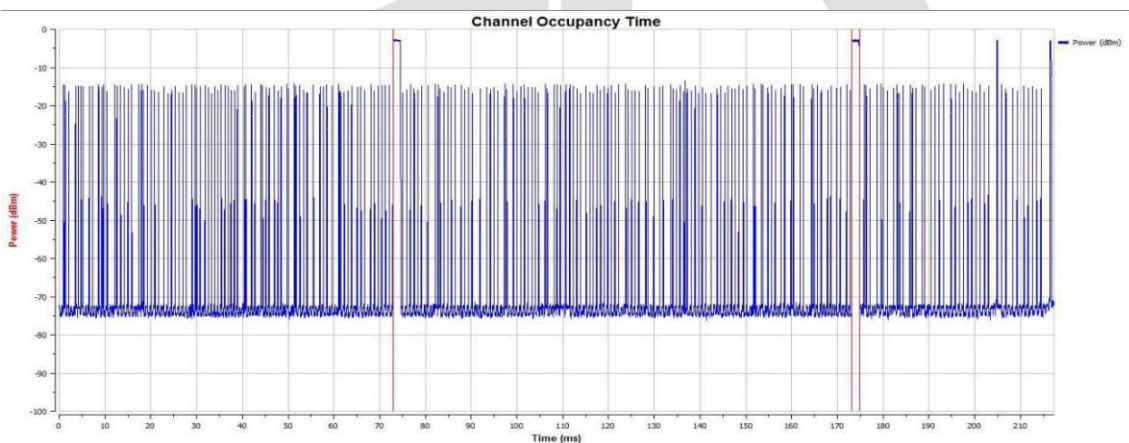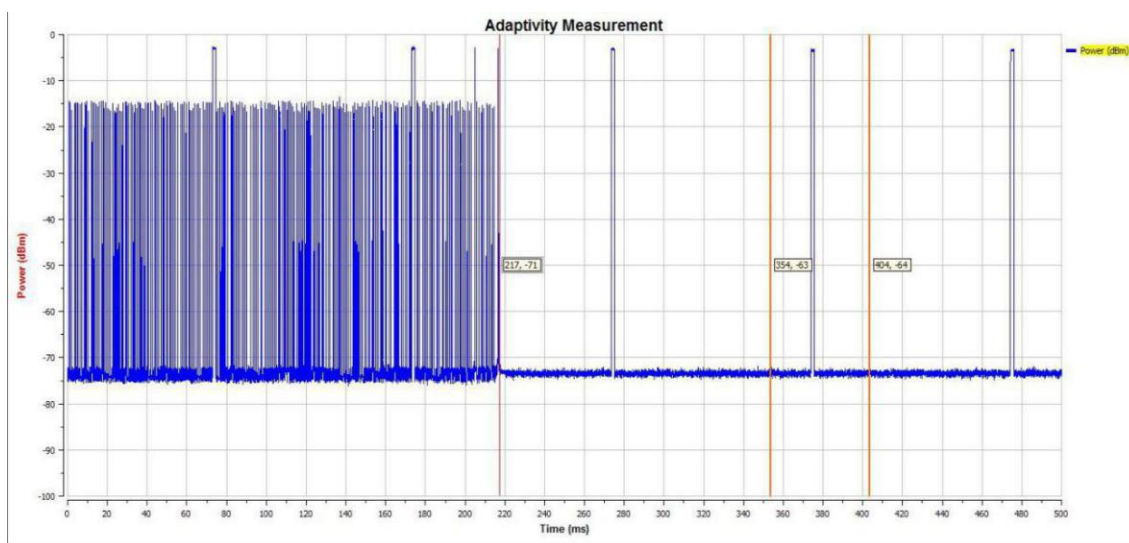

Channel Occupancy Time Info
Maximum Channel Occupancy Time (ms) : 1.65
Minimum Channel Occupancy Time (ms) : 0.00
*COT Time must be between on 1.625ms to 13ms
Idle Time (us) : 50.00
*Idle Time must longer than 20us

Suggested q Number : 4

Idle Time / Max COT (%) : 3.03

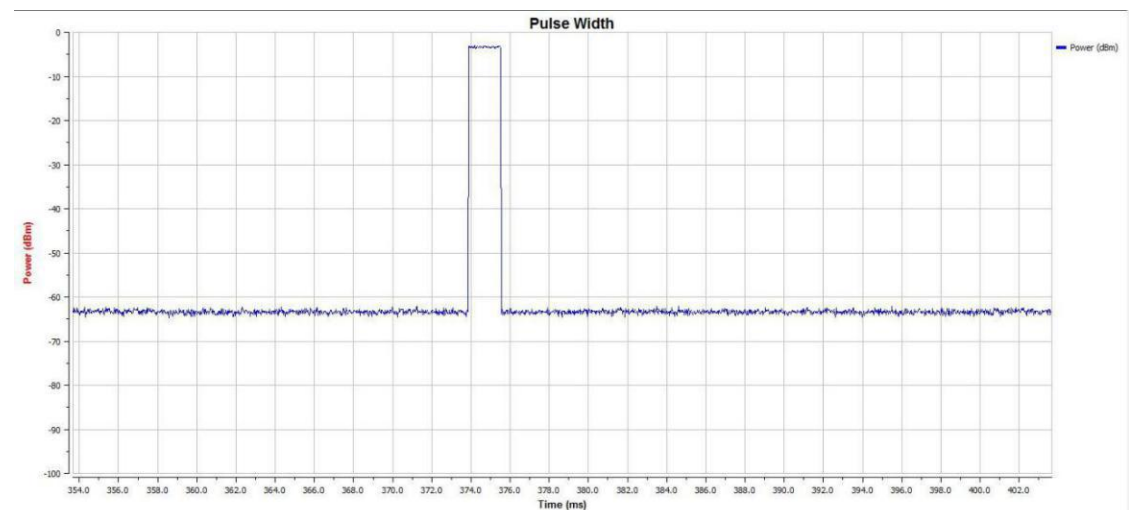

Pulse Width Info

T1 (ms) : 353.67
T2 (ms) : 403.67

Pulse Width (ms) : 1.64999389648438
Duty Cycle (%) : 3.29998779296875

6. Occupied Channel Bandwidth

6.1 Limit

The Occupied Channel Bandwidth shall fall completely within the band given in 2.4GHz to 2.4835GHz.

In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

6.2 Test Setup



6.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.3.8.

Connect the UUT to the spectrum analyzer and use the following settings:

Centre Frequency	The centre frequency of the channel under test
Frequency Span	2 × Occupied Channel Bandwidth (e.g. 40 MHz for a 20 MHz channel)
RBW	~ 1 % of the span without going below 1 % (430 KHz,820KHz)
VBW	3 × RBW (1.2MHz; 2.4MHz)
Detector	RMS
Trace	Max hold

6.4 Test Result

EUT: Wireless Controller	M/N: ERC2203-W
Test site: RF site	


Frequency Rang			
Test mode	CH	Result	Limit
		MHz	MHz
802.11 B	CH1	2403.10	>2400.0
	CH13	2480.25	<2483.5
802.11 G	CH1	2403.20	>2400.0
	CH13	2481.32	<2483.5
802.11 N20	CH1	2402.84	>2400.0
	CH13	2481.31	<2483.5
802.11 N40	CH3	2403.86	>2400.0
	CH11	2480.28	<2483.5
Test Result: PASS.			

Occupied Bandwidth		
Test mode	Occupied Bandwidth (MHz)	
	Lowest frequency	Highest frequency
802.11 B	14.796	14.854
802.11 G	16.485	16.508
802.11 N20	17.592	17.621
802.11 N40	36.659	35.690
Test Result: PASS.		

Occupied Band Width (MHz)

14.796


802.11b CH Low-2412

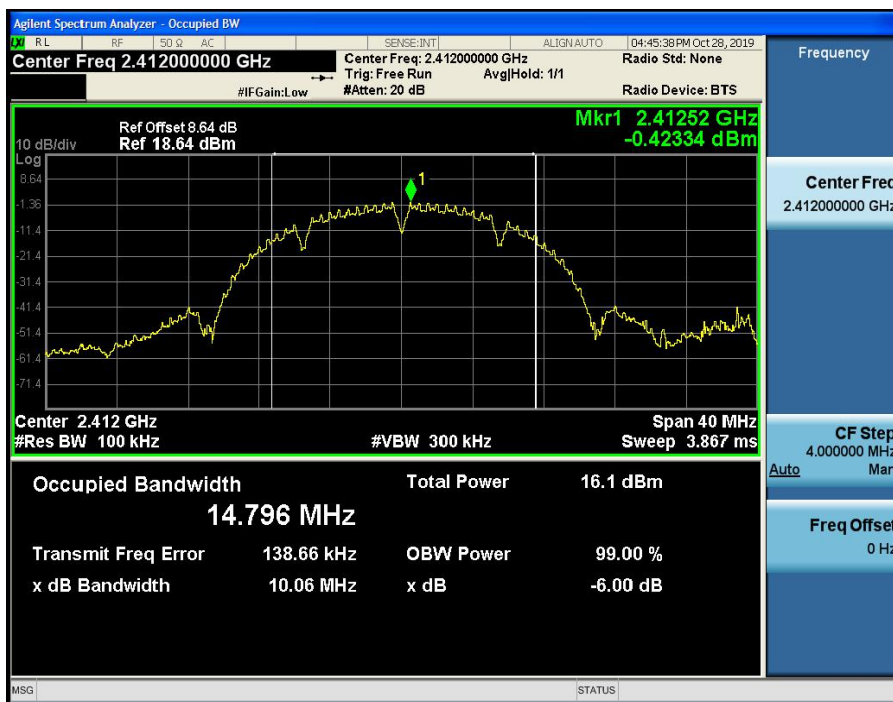

Occupied Band Width (MHz)

14.854


802.11b CH High-2472

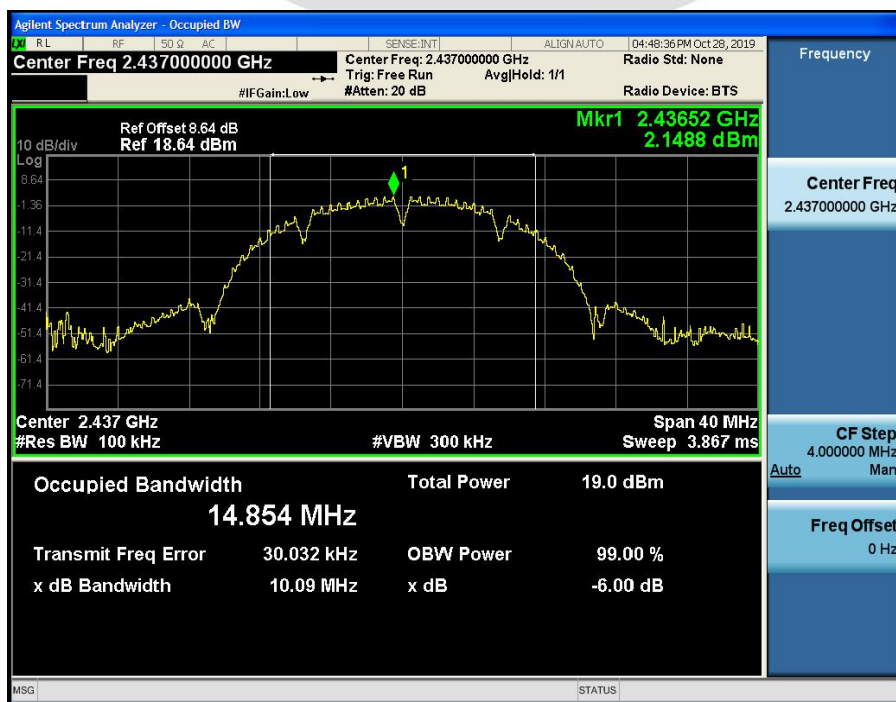

Occupied Band Width (MHz)

16.485


802.11g CH Low-2412

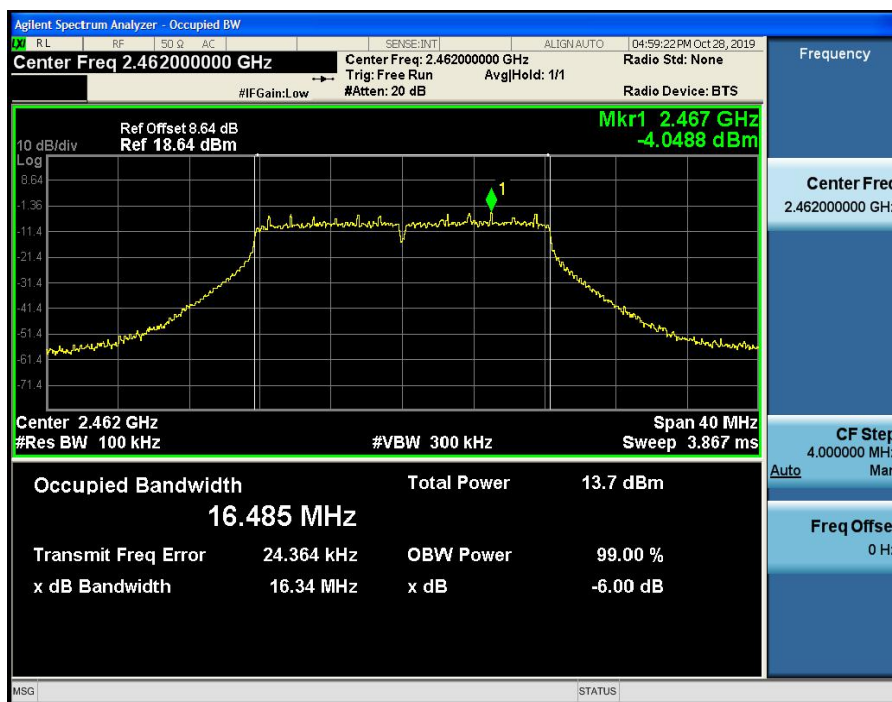

Occupied Band Width (MHz)

16.508

802.11g CH High-2472

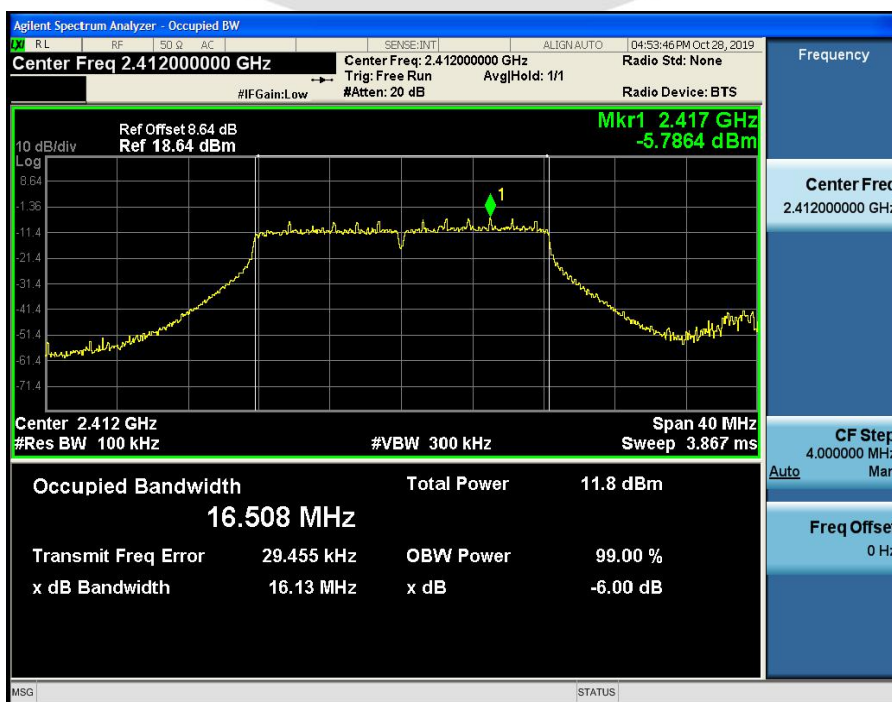

Occupied Band Width (MHz)

17.592


802.11n20 CH Low-2412



Occupied Band Width (MHz)

17.621


802.11n20 CH High-2472

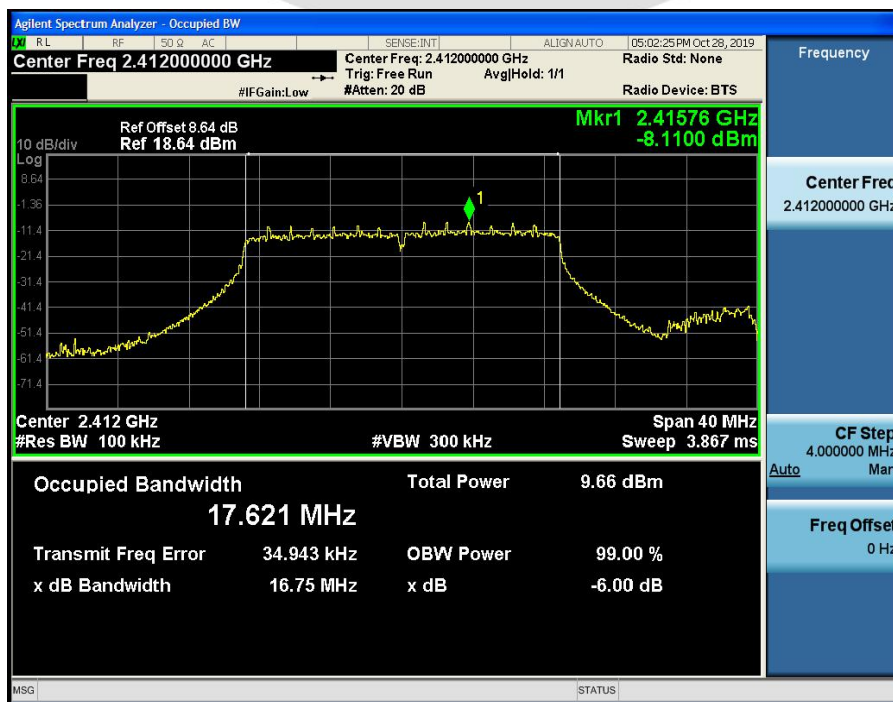

Occupied Band Width (MHz)

35.659


802.11n40 CH Low-2422

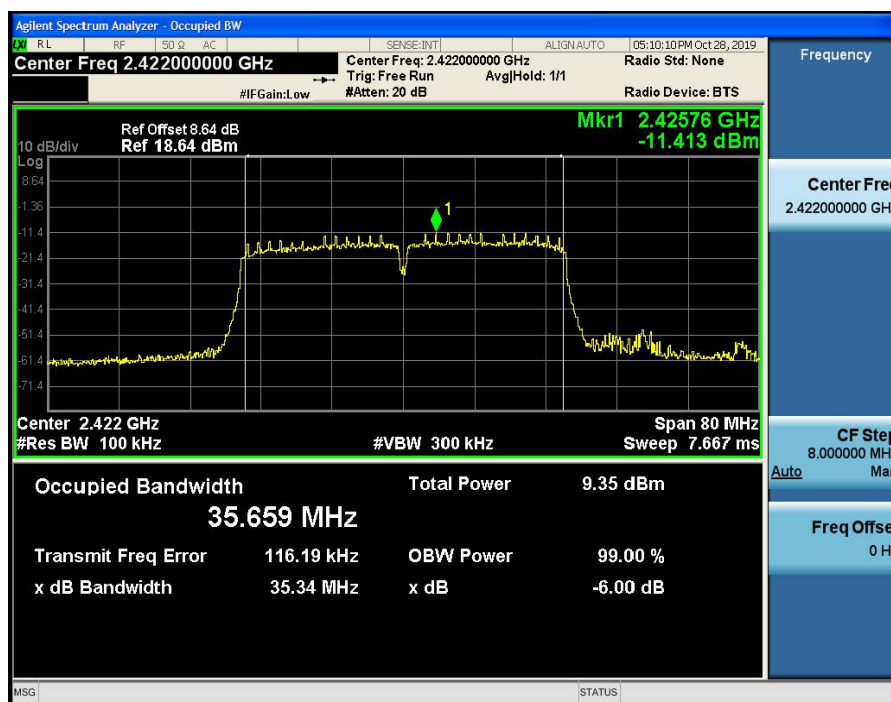

Occupied Band Width (MHz)

36.690

802.11n40 CH High-2462

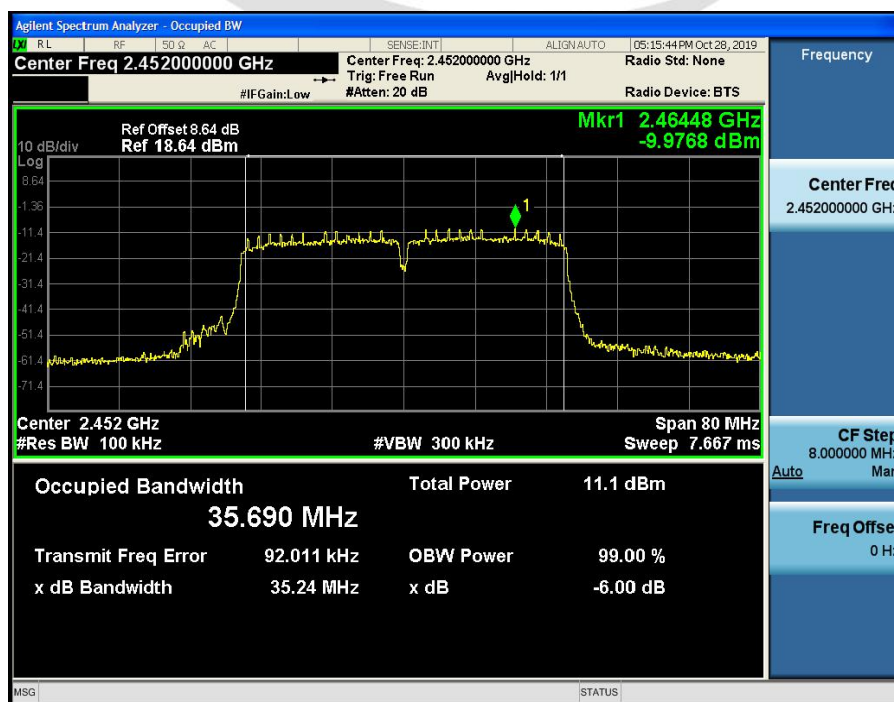

7. Transmitter unwanted emissions in the out-of-band domain

7.1 Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.


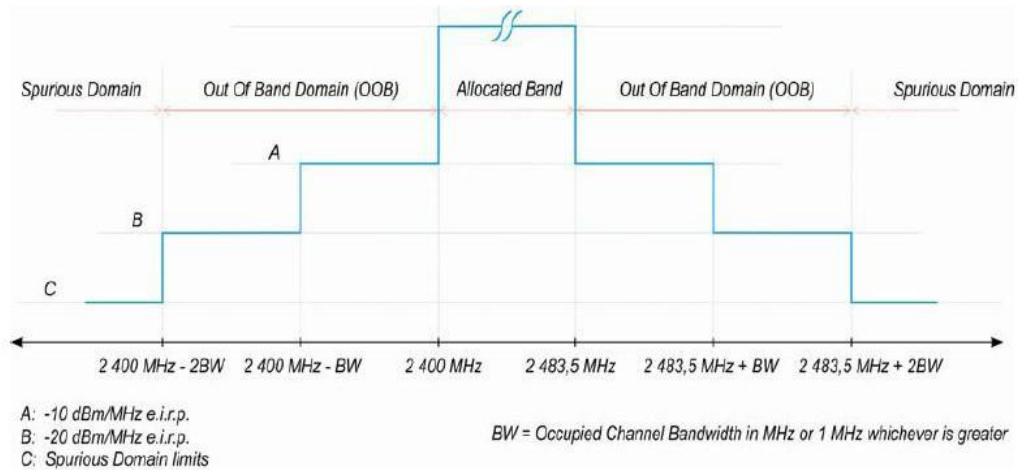


Figure 3: Transmit mask

7.2 Test Setup

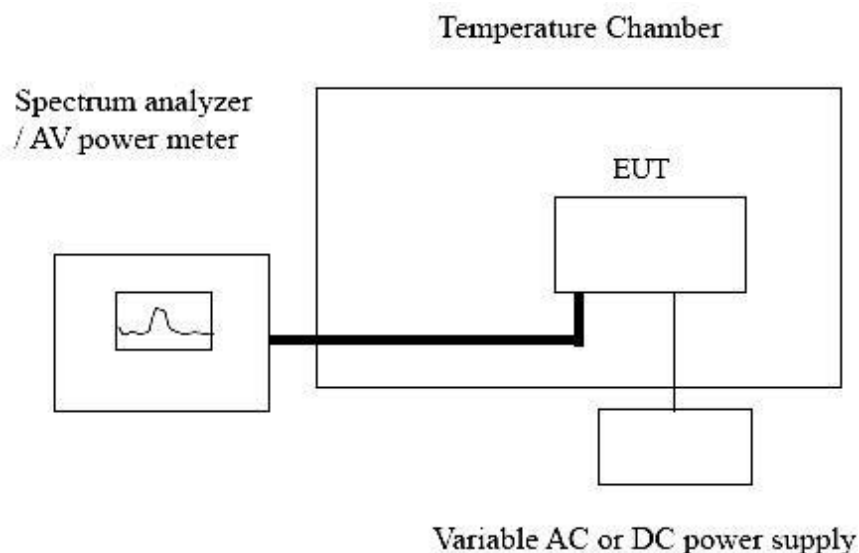

7.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.3.9.

Connect the UUT to the spectrum analyzer and use the following settings:

RBW/ VBW	1MHz/3MHz
Span	0Hz
Filter mode	Channel filter
Sweep mode	Continuous
Sweep Points	5000
Detector	RMS
Trace mode	Clear / Write
Trigger Mode	Video trigger

7.4 Test Result

Test Condition			Lower Band Edge		Higher Band Edge	
Test Mode	Temp	Voltage	Segment A (dBm/MHz)	Segment B (dBm/MHz)	Segment A (dBm/MHz)	Segment B (dBm/MHz)
802.11 B	Normal	Normal	-30.39	-54.13	-30.68	-49.25
	55°C	3.15	-31.46	-54.72	-31.09	-49.96
	55°C	4.25	-32.75	-55.15	-31.18	-50.39
	-20°C	3.15	-31.90	-55.97	-30.83	-50.57
	-20°C	4.25	-30.72	-55.61	-31.52	-50.76
Limit			-10	-20	-10	-20
Conclusion			PASS			

Test Condition			Lower Band Edge		Higher Band Edge	
Test Mode	Temp	Voltage	Segment A (dBm/MHz)	Segment B (dBm/MHz)	Segment A (dBm/MHz)	Segment B (dBm/MHz)
802.11 G	Normal	Normal	-35.84	-50.47	-33.69	-48.51
	55℃	3.15	-36.09	-50.71	-33.87	-49.48
	55℃	4.25	-36.37	-51.24	-34.21	-49.61
	-20℃	3.15	-36.20	-51.00	-34.09	-49.19
	-20℃	4.25	-36.72	-50.64	-34.35	-48.85
Limit			-10	-20	-10	-20
Conclusion			PASS			
Remark: All modulations of EUT have been tested, but only show the test data of the worst case in this report.						


Test Condition			Lower Band Edge		Higher Band Edge	
Test Mode	Temp	Voltage	Segment A (dBm/MHz)	Segment B (dBm/MHz)	Segment A (dBm/MHz)	Segment B (dBm/MHz)
802.11 N20	Normal	Normal	-35.48	-50.22	-31.07	-47.67
	55℃	3.15	-36.18	-51.05	-31.49	-48.04
	55℃	4.25	-35.75	-50.67	-31.37	-48.56
	-20℃	3.15	-36.20	-51.30	-31.99	-49.14
	-20℃	4.25	-36.38	-51.93	-31.65	-47.87
Limit			-10	-20	-10	-20
Conclusion			PASS			
Remark: All modulations of EUT have been tested, but only show the test data of the worst case in this report.						

Test Condition			Lower Band Edge		Higher Band Edge	
Test Mode	Temp	Voltage	Segment A (dBm/MHz)	Segment B (dBm/MHz)	Segment A (dBm/MHz)	Segment B (dBm/MHz)
802.11 N40	Normal	Normal	-40.79	-53.11	-42.06	-51.81
	55℃	3.15	-41.41	-53.70	-42.46	-52.08
	55℃	4.25	-41.28	-54.50	-42.70	-53.09
	-20℃	3.15	-42.16	-53.34	-43.24	-52.50
	-20℃	4.25	-41.29	-53.61	-42.32	-51.97
Limit			-10	-20	-10	-20
Conclusion			PASS			
Remark: All modulations of EUT have been tested, but only show the test data of the worst case in this report.						

中鉴检测
CCTI TESTING


802.11 b CH Low (Normal Temp, Normal Voltage)

Channel	Antenna	Frequency	Level	Limit
CH Low-2412	Antenna 1	2399.5	-30.39	-10
CH Low-2412	Antenna 1	2398.5	-30.52	-10
CH Low-2412	Antenna 1	2397.5	-30.59	-10
CH Low-2412	Antenna 1	2396.5	-34.10	-10
CH Low-2412	Antenna 1	2395.5	-42.33	-10
CH Low-2412	Antenna 1	2394.5	-47.10	-10
CH Low-2412	Antenna 1	2393.5	-51.18	-10
CH Low-2412	Antenna 1	2392.5	-51.74	-10
CH Low-2412	Antenna 1	2391.5	-53.47	-10
CH Low-2412	Antenna 1	2390.5	-53.35	-10
CH Low-2412	Antenna 1	2389.5	-55.33	-10
CH Low-2412	Antenna 1	2388.5	-56.06	-10
CH Low-2412	Antenna 1	2387.5	-55.27	-10
CH Low-2412	Antenna 1	2386.462	-54.45	-20
CH Low-2412	Antenna 1	2385.462	-54.23	-20
CH Low-2412	Antenna 1	2384.462	-56.06	-20
CH Low-2412	Antenna 1	2383.462	-56.26	-20
CH Low-2412	Antenna 1	2382.462	-57.60	-20
CH Low-2412	Antenna 1	2381.462	-56.71	-20
CH Low-2412	Antenna 1	2380.462	-57.21	-20
CH Low-2412	Antenna 1	2379.462	-57.00	-20
CH Low-2412	Antenna 1	2378.462	-56.65	-20
CH Low-2412	Antenna 1	2377.462	-56.77	-20
CH Low-2412	Antenna 1	2376.462	-58.06	-20
CH Low-2412	Antenna 1	2375.462	-58.30	-20
CH Low-2412	Antenna 1	2374.462	-57.19	-20

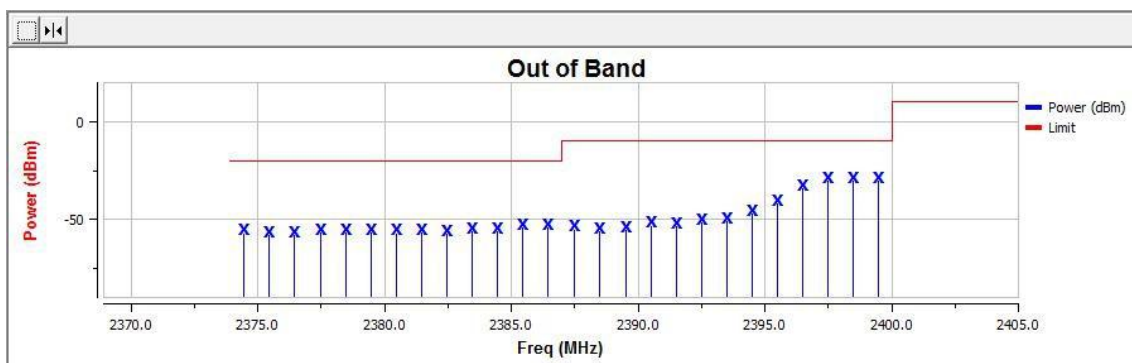


802.11 b CH High (Normal Temp, Normal Voltage)

Channel	Antenna	Frequency	Level	Limit
CH High-2472	Antenna 1	2496.223	-50.69	-10
CH High-2472	Antenna 1	2495.223	-51.65	-10
CH High-2472	Antenna 1	2494.223	-53.45	-10
CH High-2472	Antenna 1	2493.223	-47.87	-10
CH High-2472	Antenna 1	2492.223	-49.51	-10
CH High-2472	Antenna 1	2491.223	-48.12	-10
CH High-2472	Antenna 1	2490.223	-48.12	-10
CH High-2472	Antenna 1	2489.223	-50.94	-10
CH High-2472	Antenna 1	2488.223	-40.83	-10
CH High-2472	Antenna 1	2487.223	-33.82	-10
CH High-2472	Antenna 1	2486.223	-31.62	-10
CH High-2472	Antenna 1	2485.223	-30.77	-10
CH High-2472	Antenna 1	2484.223	-31.09	-10
CH High-2472	Antenna 1	2509.446	-57.23	-20
CH High-2472	Antenna 1	2508.446	-57.51	-20
CH High-2472	Antenna 1	2507.446	-56.65	-20
CH High-2472	Antenna 1	2506.446	-56.35	-20
CH High-2472	Antenna 1	2505.446	-57.22	-20
CH High-2472	Antenna 1	2504.446	-58.08	-20
CH High-2472	Antenna 1	2503.446	-57.67	-20
CH High-2472	Antenna 1	2502.446	-57.03	-20
CH High-2472	Antenna 1	2501.446	-56.70	-20
CH High-2472	Antenna 1	2500.446	-57.72	-20
CH High-2472	Antenna 1	2499.446	-56.31	-20
CH High-2472	Antenna 1	2498.446	-51.34	-20
CH High-2472	Antenna 1	2497.446	-49.00	-20

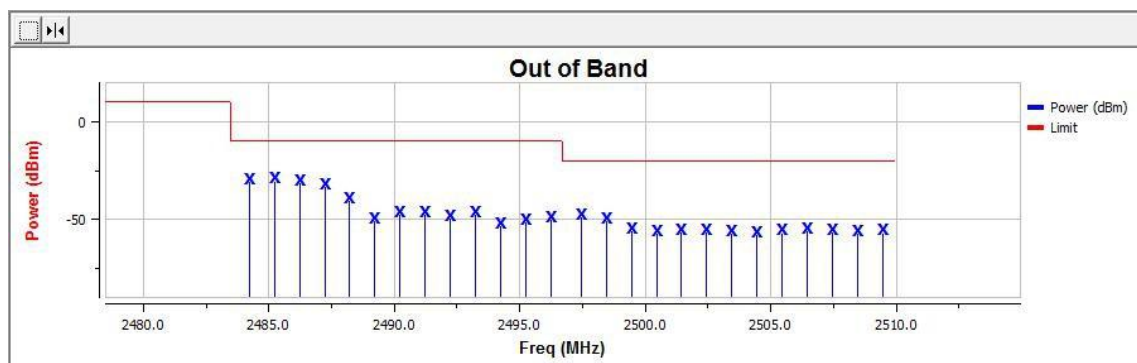


802.11 g CH Low (Normal Temp, Normal Voltage)

Channel	Antenna	Frequency	Level	Limit
CH Low-2412	Antenna 1	2399.5	-35.84	-10
CH Low-2412	Antenna 1	2398.5	-36.40	-10
CH Low-2412	Antenna 1	2397.5	-37.29	-10
CH Low-2412	Antenna 1	2396.5	-38.19	-10
CH Low-2412	Antenna 1	2395.5	-39.05	-10
CH Low-2412	Antenna 1	2394.5	-40.08	-10
CH Low-2412	Antenna 1	2393.5	-41.31	-10
CH Low-2412	Antenna 1	2392.5	-42.48	-10
CH Low-2412	Antenna 1	2391.5	-43.83	-10
CH Low-2412	Antenna 1	2390.5	-45.17	-10
CH Low-2412	Antenna 1	2389.5	-46.47	-10
CH Low-2412	Antenna 1	2388.5	-47.65	-10
CH Low-2412	Antenna 1	2387.5	-48.36	-10
CH Low-2412	Antenna 1	2386.5	-48.82	-10
CH Low-2412	Antenna 1	2385.5	-49.39	-10
CH Low-2412	Antenna 1	2384.5	-49.89	-10
CH Low-2412	Antenna 1	2383.152	-50.56	-20
CH Low-2412	Antenna 1	2382.152	-50.95	-20
CH Low-2412	Antenna 1	2381.152	-51.35	-20
CH Low-2412	Antenna 1	2380.152	-51.86	-20
CH Low-2412	Antenna 1	2379.152	-52.33	-20
CH Low-2412	Antenna 1	2377.152	-52.85	-20
CH Low-2412	Antenna 1	2376.152	-53.18	-20
CH Low-2412	Antenna 1	2374.152	-53.68	-20
CH Low-2412	Antenna 1	2373.152	-53.94	-20
CH Low-2412	Antenna 1	2371.152	-54.39	-20
CH Low-2412	Antenna 1	2369.152	-54.75	-20
CH Low-2412	Antenna 1	2368.152	-54.88	-20

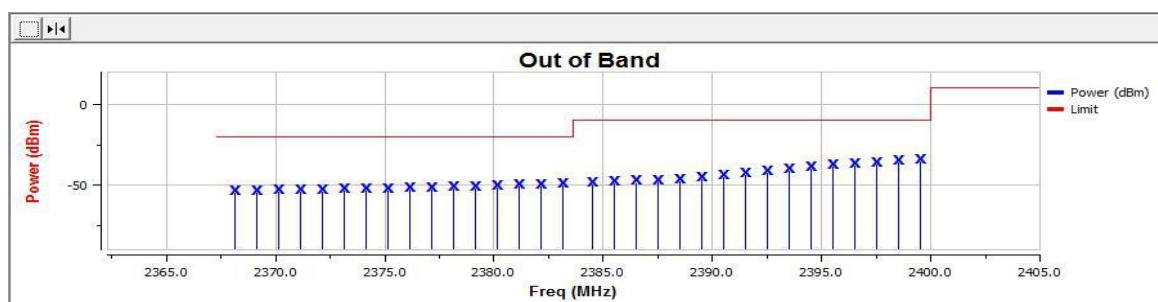


802.11 g CH High (Normal Temp, Normal Voltage)

Channel	Antenna	Frequency	Level	Limit
CH High-2472	Antenna 1	2499.356	-47.29	-10
CH High-2472	Antenna 1	2498.356	-46.68	-10
CH High-2472	Antenna 1	2497.356	-45.67	-10
CH High-2472	Antenna 1	2496.356	-45.20	-10
CH High-2472	Antenna 1	2495.356	-44.20	-10
CH High-2472	Antenna 1	2494.356	-43.04	-10
CH High-2472	Antenna 1	2493.356	-42.04	-10
CH High-2472	Antenna 1	2492.356	-40.94	-10
CH High-2472	Antenna 1	2491.356	-39.89	-10
CH High-2472	Antenna 1	2488.356	-37.01	-10
CH High-2472	Antenna 1	2487.356	-35.98	-10
CH High-2472	Antenna 1	2485.356	-34.31	-10
CH High-2472	Antenna 1	2484.356	-33.79	-10
CH High-2472	Antenna 1	2515.712	-55.22	-20
CH High-2472	Antenna 1	2514.712	-54.96	-20
CH High-2472	Antenna 1	2513.712	-54.74	-20
CH High-2472	Antenna 1	2512.712	-54.34	-20
CH High-2472	Antenna 1	2511.712	-54.06	-20
CH High-2472	Antenna 1	2510.712	-53.68	-20
CH High-2472	Antenna 1	2509.712	-53.36	-20
CH High-2472	Antenna 1	2508.712	-52.90	-20
CH High-2472	Antenna 1	2505.712	-51.43	-20
CH High-2472	Antenna 1	2504.712	-50.84	-20
CH High-2472	Antenna 1	2503.712	-50.28	-20
CH High-2472	Antenna 1	2502.712	-49.55	-20
CH High-2472	Antenna 1	2501.712	-48.98	-20
CH High-2472	Antenna 1	2500.712	-48.26	-20

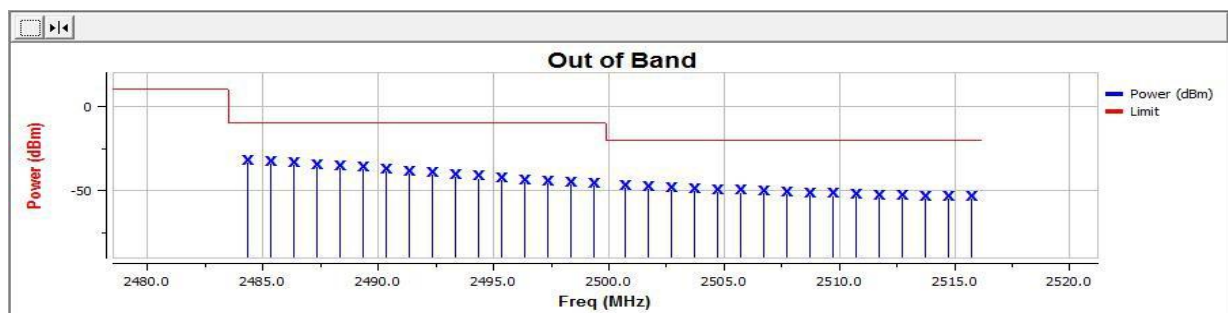


802.11 n20 CH Low (Normal Temp, Normal Voltage)

Channel	Antenna	Frequency	Level	Limit
CH Low-2412	Antenna 1	2399.5	-35.48	-10
CH Low-2412	Antenna 1	2398.5	-35.97	-10
CH Low-2412	Antenna 1	2397.5	-36.70	-10
CH Low-2412	Antenna 1	2396.5	-37.43	-10
CH Low-2412	Antenna 1	2395.5	-38.26	-10
CH Low-2412	Antenna 1	2394.5	-39.26	-10
CH Low-2412	Antenna 1	2391.5	-42.39	-10
CH Low-2412	Antenna 1	2390.5	-43.57	-10
CH Low-2412	Antenna 1	2389.5	-44.80	-10
CH Low-2412	Antenna 1	2388.5	-45.98	-10
CH Low-2412	Antenna 1	2387.5	-47.09	-10
CH Low-2412	Antenna 1	2386.5	-48.04	-10
CH Low-2412	Antenna 1	2385.5	-48.75	-10
CH Low-2412	Antenna 1	2384.5	-49.08	-10
CH Low-2412	Antenna 1	2383.5	-49.58	-10
CH Low-2412	Antenna 1	2381.948	-50.31	-20
CH Low-2412	Antenna 1	2380.948	-50.81	-20
CH Low-2412	Antenna 1	2379.948	-51.22	-20
CH Low-2412	Antenna 1	2378.948	-51.70	-20
CH Low-2412	Antenna 1	2377.948	-52.12	-20
CH Low-2412	Antenna 1	2376.948	-52.43	-20
CH Low-2412	Antenna 1	2375.948	-52.82	-20
CH Low-2412	Antenna 1	2374.948	-53.21	-20
CH Low-2412	Antenna 1	2371.948	-54.02	-20
CH Low-2412	Antenna 1	2370.948	-54.21	-20
CH Low-2412	Antenna 1	2367.948	-54.88	-20
CH Low-2412	Antenna 1	2366.948	-54.98	-20
CH Low-2412	Antenna 1	2365.948	-55.19	-20

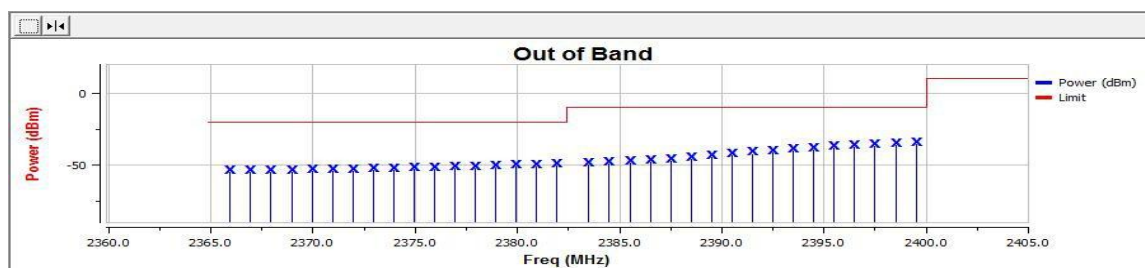

802.11 n20 CH High (Normal Temp, Normal Voltage)


Channel	Antenna	Frequency	Level	Limit
CH High-2472	Antenna 1	2500.548	-46.96	-10
CH High-2472	Antenna 1	2499.548	-46.27	-10
CH High-2472	Antenna 1	2498.548	-45.65	-10
CH High-2472	Antenna 1	2497.548	-44.78	-10
CH High-2472	Antenna 1	2496.548	-43.96	-10
CH High-2472	Antenna 1	2495.548	-42.98	-10
CH High-2472	Antenna 1	2494.548	-41.81	-10
CH High-2472	Antenna 1	2493.548	-40.89	-10
CH High-2472	Antenna 1	2492.548	-39.95	-10
CH High-2472	Antenna 1	2491.548	-39.03	-10
CH High-2472	Antenna 1	2490.548	-38.04	-10
CH High-2472	Antenna 1	2489.548	-37.18	-10
CH High-2472	Antenna 1	2488.548	-36.47	-10
CH High-2472	Antenna 1	2486.548	-34.88	-10
CH High-2472	Antenna 1	2485.548	-33.98	-10
CH High-2472	Antenna 1	2484.548	-33.57	-10
CH High-2472	Antenna 1	2483.548	-31.16	-10
CH High-2472	Antenna 1	2518.096	-55.47	-20
CH High-2472	Antenna 1	2516.096	-54.95	-20
CH High-2472	Antenna 1	2515.096	-54.62	-20
CH High-2472	Antenna 1	2510.096	-52.80	-20
CH High-2472	Antenna 1	2509.096	-52.17	-20
CH High-2472	Antenna 1	2508.096	-51.86	-20
CH High-2472	Antenna 1	2506.096	-50.78	-20
CH High-2472	Antenna 1	2503.096	-48.98	-20
CH High-2472	Antenna 1	2502.096	-48.09	-20
CH High-2472	Antenna 1	2501.096	-47.43	-20

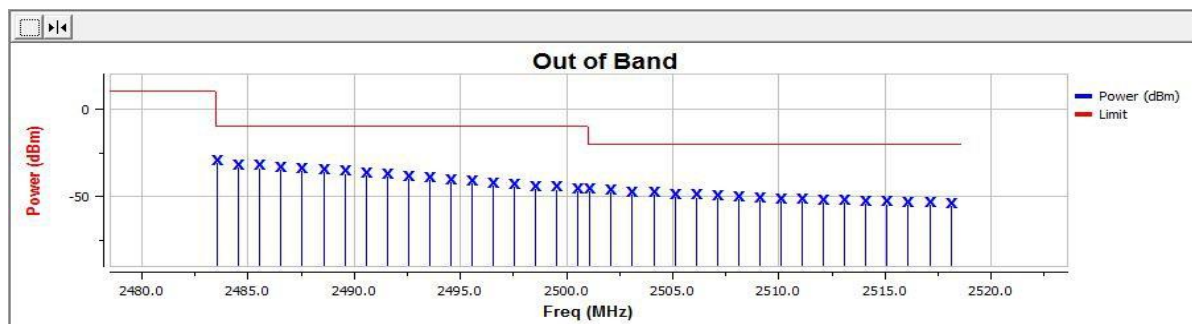

802.11 n40 CH Low (Normal Temp, Normal Voltage)

Channel	Antenna	Frequency	Level	Limit
CH Low-2422	Antenna 1	2399.5	-40.89	-10
CH Low-2422	Antenna 1	2398.5	-40.97	-10
CH Low-2422	Antenna 1	2397.5	-41.21	-10
CH Low-2422	Antenna 1	2396.5	-41.16	-10
CH Low-2422	Antenna 1	2395.5	-41.19	-10
CH Low-2422	Antenna 1	2394.5	-41.19	-10
CH Low-2422	Antenna 1	2393.5	-41.45	-10
CH Low-2422	Antenna 1	2392.5	-41.68	-10
CH Low-2422	Antenna 1	2391.5	-41.93	-10
CH Low-2422	Antenna 1	2390.5	-42.05	-10
CH Low-2422	Antenna 1	2389.5	-42.16	-10
CH Low-2422	Antenna 1	2388.5	-42.47	-10
CH Low-2422	Antenna 1	2387.5	-42.91	-10
CH Low-2422	Antenna 1	2386.5	-43.23	-10
CH Low-2422	Antenna 1	2385.5	-43.56	-10
CH Low-2422	Antenna 1	2384.5	-43.72	-10
CH Low-2422	Antenna 1	2383.5	-44.63	-10
CH Low-2422	Antenna 1	2382.5	-45.16	-10
CH Low-2422	Antenna 1	2381.5	-45.54	-10
CH Low-2422	Antenna 1	2380.5	-46.07	-10
CH Low-2422	Antenna 1	2379.5	-46.39	-10
CH Low-2422	Antenna 1	2378.5	-47.01	-10
CH Low-2422	Antenna 1	2377.5	-47.52	-10
CH Low-2422	Antenna 1	2376.5	-48.05	-10
CH Low-2422	Antenna 1	2375.5	-48.43	-10
CH Low-2422	Antenna 1	2374.5	-48.83	-10
CH Low-2422	Antenna 1	2373.5	-49.44	-10
CH Low-2422	Antenna 1	2372.5	-49.88	-10
CH Low-2422	Antenna 1	2371.5	-50.4	-10
CH Low-2422	Antenna 1	2370.5	-50.72	-10
CH Low-2422	Antenna 1	2369.5	-51.02	-10
CH Low-2422	Antenna 1	2368.5	-51.42	-10
CH Low-2422	Antenna 1	2367.5	-51.9	-10
CH Low-2422	Antenna 1	2366.5	-52.2	-10
CH Low-2422	Antenna 1	2365.5	-52.43	-10


CH Low-2422	Antenna 1	2363.602	-53.33	-20
CH Low-2422	Antenna 1	2361.602	-54.17	-20
CH Low-2422	Antenna 1	2360.602	-54.44	-20
CH Low-2422	Antenna 1	2359.602	-54.7	-20
CH Low-2422	Antenna 1	2358.602	-55.1	-20
CH Low-2422	Antenna 1	2357.602	-55.38	-20
CH Low-2422	Antenna 1	2356.602	-55.67	-20
CH Low-2422	Antenna 1	2355.602	-56.02	-20
CH Low-2422	Antenna 1	2354.602	-56.31	-20
CH Low-2422	Antenna 1	2353.602	-56.73	-20
CH Low-2422	Antenna 1	2352.602	-57.08	-20
CH Low-2422	Antenna 1	2350.602	-57.86	-20
CH Low-2422	Antenna 1	2349.602	-58.03	-20
CH Low-2422	Antenna 1	2348.602	-58.48	-20
CH Low-2422	Antenna 1	2345.602	-59.41	-20
CH Low-2422	Antenna 1	2344.602	-59.65	-20
CH Low-2422	Antenna 1	2338.602	-61.5	-20
CH Low-2422	Antenna 1	2337.602	-61.75	-20
CH Low-2422	Antenna 1	2335.602	-62.37	-20
CH Low-2422	Antenna 1	2334.602	-62.58	-20
CH Low-2422	Antenna 1	2333.602	-62.9	-20
CH Low-2422	Antenna 1	2332.602	-63.15	-20
CH Low-2422	Antenna 1	2331.602	-63.39	-20
CH Low-2422	Antenna 1	2330.602	-63.66	-20
CH Low-2422	Antenna 1	2329.602	-63.92	-20

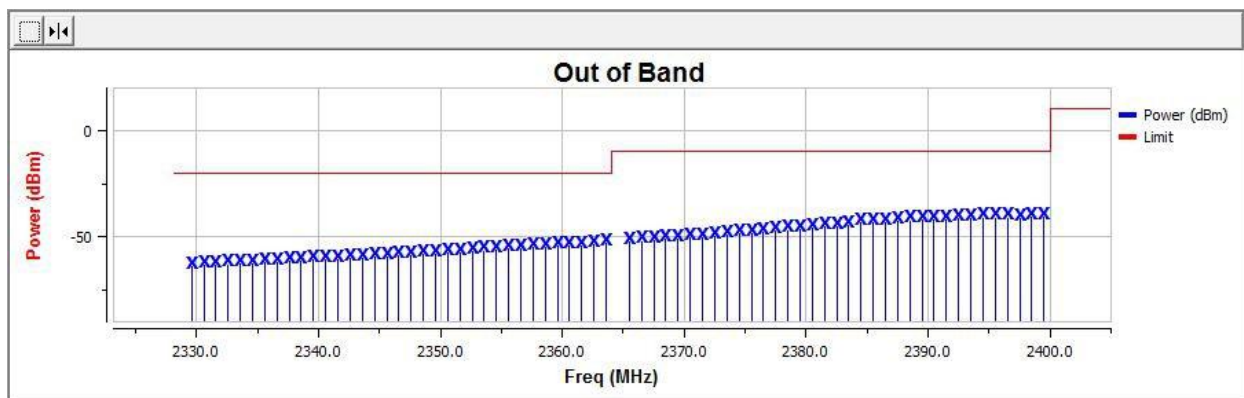

802.11 n40 CH High (Normal Temp, Normal Voltage)

Channel	Antenna	Frequency	Level	Limit
CH High-2462	Antenna 1	2518.952	-51.31	-10
CH High-2462	Antenna 1	2517.952	-51.16	-10
CH High-2462	Antenna 1	2516.952	-50.68	-10
CH High-2462	Antenna 1	2515.952	-50.46	-10
CH High-2462	Antenna 1	2514.952	-50.3	-10
CH High-2462	Antenna 1	2513.952	-49.98	-10
CH High-2462	Antenna 1	2512.952	-49.8	-10
CH High-2462	Antenna 1	2511.952	-49.58	-10
CH High-2462	Antenna 1	2510.952	-49.12	-10
CH High-2462	Antenna 1	2509.952	-48.8	-10
CH High-2462	Antenna 1	2508.952	-48.6	-10
CH High-2462	Antenna 1	2507.952	-48.44	-10
CH High-2462	Antenna 1	2506.952	-48.2	-10
CH High-2462	Antenna 1	2505.952	-48.07	-10
CH High-2462	Antenna 1	2504.952	-47.77	-10
CH High-2462	Antenna 1	2503.952	-47.55	-10
CH High-2462	Antenna 1	2502.952	-47.23	-10
CH High-2462	Antenna 1	2501.952	-46.96	-10
CH High-2462	Antenna 1	2496.952	-45.2	-10
CH High-2462	Antenna 1	2495.952	-44.81	-10
CH High-2462	Antenna 1	2494.952	-44.49	-10
CH High-2462	Antenna 1	2493.952	-44.35	-10
CH High-2462	Antenna 1	2492.952	-44.01	-10
CH High-2462	Antenna 1	2491.952	-44.22	-10
CH High-2462	Antenna 1	2490.952	-43.98	-10
CH High-2462	Antenna 1	2489.952	-43.72	-10
CH High-2462	Antenna 1	2488.952	-43.74	-10
CH High-2462	Antenna 1	2487.952	-43.51	-10
CH High-2462	Antenna 1	2486.952	-43.36	-10
CH High-2462	Antenna 1	2485.952	-42.89	-10
CH High-2462	Antenna 1	2484.952	-42.98	-10
CH High-2462	Antenna 1	2483.952	-42.28	-10
CH High-2462	Antenna 1	2554.904	-61.74	-20
CH High-2462	Antenna 1	2553.904	-61.52	-20
CH High-2462	Antenna 1	2552.904	-61.37	-20

CH High-2462	Antenna 1	2551.904	-61.02	-20
CH High-2462	Antenna 1	2550.904	-60.92	-20
CH High-2462	Antenna 1	2549.904	-60.79	-20
CH High-2462	Antenna 1	2548.904	-60.52	-20
CH High-2462	Antenna 1	2545.904	-59.95	-20
CH High-2462	Antenna 1	2544.904	-59.65	-20
CH High-2462	Antenna 1	2543.904	-59.44	-20
CH High-2462	Antenna 1	2542.904	-59.25	-20
CH High-2462	Antenna 1	2541.904	-59	-20
CH High-2462	Antenna 1	2540.904	-58.69	-20
CH High-2462	Antenna 1	2537.904	-57.95	-20
CH High-2462	Antenna 1	2536.904	-57.59	-20
CH High-2462	Antenna 1	2535.904	-57.13	-20
CH High-2462	Antenna 1	2534.904	-56.87	-20
CH High-2462	Antenna 1	2533.904	-56.55	-20
CH High-2462	Antenna 1	2531.904	-55.97	-20
CH High-2462	Antenna 1	2530.904	-55.65	-20
CH High-2462	Antenna 1	2529.904	-55.35	-20
CH High-2462	Antenna 1	2528.904	-54.93	-20
CH High-2462	Antenna 1	2525.904	-53.77	-20
CH High-2462	Antenna 1	2524.904	-53.43	-20
CH High-2462	Antenna 1	2523.904	-53.03	-20
CH High-2462	Antenna 1	2522.904	-52.75	-20
CH High-2462	Antenna 1	2521.904	-52.29	-20
CH High-2462	Antenna 1	2520.904	-52.08	-20
CH High-2462	Antenna 1	2519.904	-51.67	-20

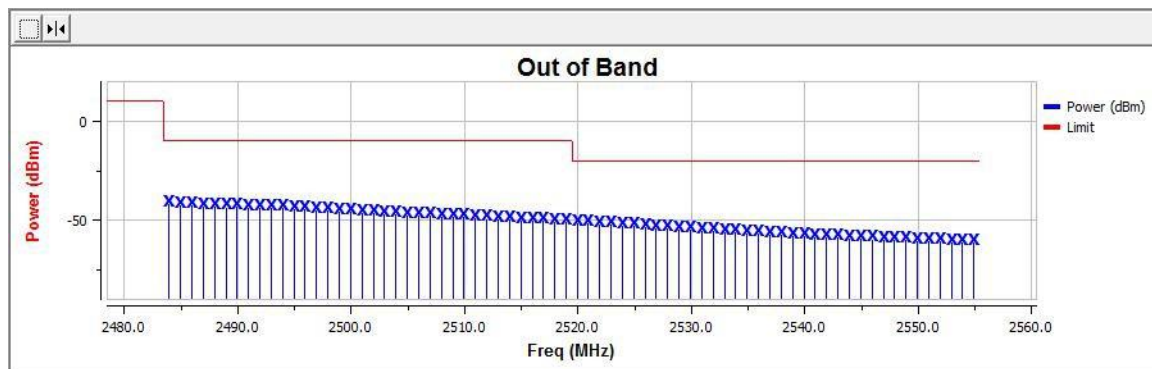

8. Receiver Blocking

8.1 Limit


Adaptive equipment using wide band modulations other than FHSS, shall comply with the requirements defined in clauses 4.3.2.5.1 (non-LBT based DAA) or 4.3.2.5.2 (LBT based DAA) in the presence of a blocking signal with

characteristics as provided in table 6.

Table 6: Receiver Blocking parameters

Equipment Type (LBT / non- LBT)	Wanted signal mean power from companion device	Blocking signal frequency [MHz]	Blocking signal power [dBm]	Type of interfering signal
LBT	sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-30	CW
Non-LBT	-30 dBm			
NOTE 1: The highest blocking frequency shall be used for testing the lowest operating channel, while the lowest blocking frequency shall be used for testing the highest operating channel.				
NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.				

8.2 Test Setup

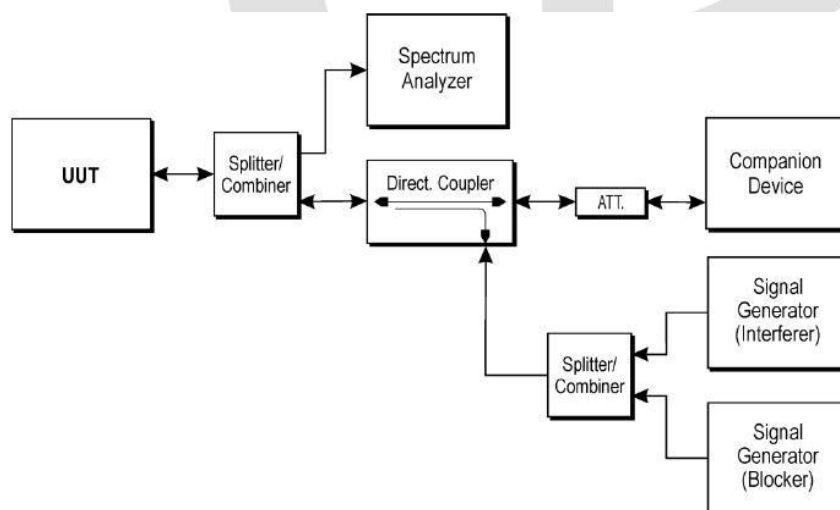

8.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.3.7.

8.4 Test Result

PASS, please refer to clause 5 for details.

Observation Result: Refer to 5 that blocking signal is injected while interference signal is present. With the presence of the blocking signal, channel of the observation does not resume the link.

9. Spurious emissions – Transmitter (30- 1000MHz)

9.1 Applied procedures / limit

Clause	Test Item	Frequency range	Maximum power, e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	RBW/VBW
4.3.2	Spurious emissions (radiated)	30 MHz to 47 MHz	-36 dBm	100 kHz/300KHz
		47 MHz to 74 MHz	-54 dBm	100 kHz/300KHz
		74 MHz to 87,5 MHz	-36 dBm	100 kHz/300KHz
		87,5 MHz to 118 MHz	-54 dBm	100 kHz/300KHz
		118 MHz to 174 MHz	-36 dBm	100 kHz/300KHz
		174 MHz to 230 MHz	-54 dBm	100 kHz/300KHz
		230 MHz to 470 MHz	-36 dBm	100 kHz/300KHz
		470 MHz to 862 MHz	-54 dBm	100 kHz/300KHz
		862 MHz to 1 GHz	-36 dBm	100 kHz/300KHz
		1 GHz to 12,75 GHz	-30 dBm	1 MHz/3MHz

9.1.1 Measuring Instruments and Setting

Please refer to section 7.1.1 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	1000 MHz
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	100 kHz / 300 kHz


9.1.2 Test Procedures

- The EUT was placed on the top of the turntable in open test site area.
- The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- This measurement shall be repeated with the transmitter in standby mode where applicable.
- For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna
- was placed 3 meters far away from the turntable.
- The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- Replace the EUT by standard antenna and feed the RF port by signal generator.
- Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- Adjust the power level of the signal generator to reach the same reading with Read Level (Raw). The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.

- j. If the level calculated in (9) is higher than limit by more than 6dB, then lower the RBW of the spectrum analyzer to 30KHz. If the level of this emission does not change by more than 2dB, then it is taken as narrowband emission, otherwise, wideband emission.
- k. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range

9.1.3 Test Setup Layout

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

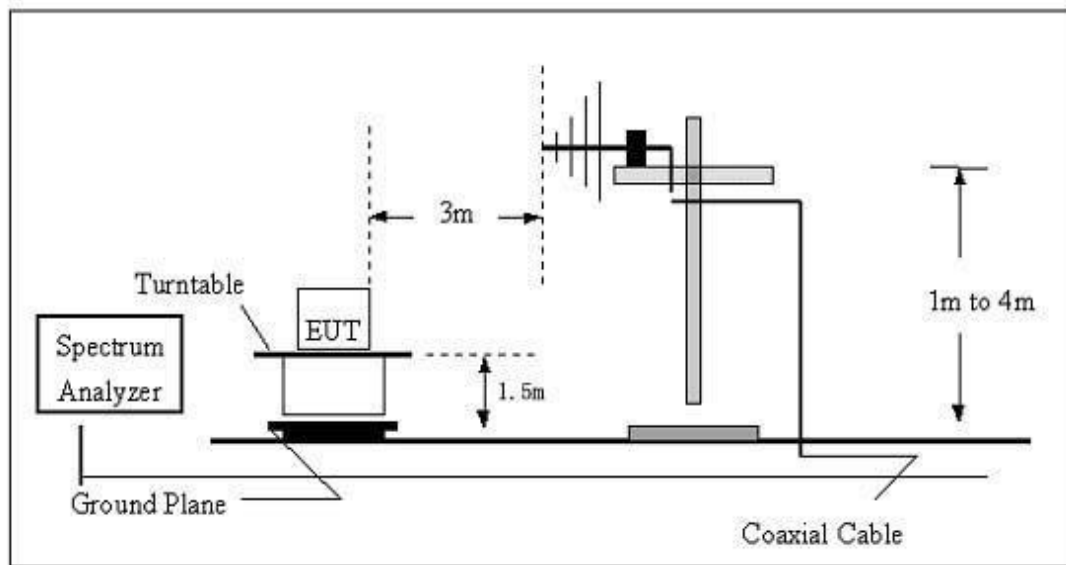

9.1.4 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

9.1.5 Results of Standby Mode Spurious Emissions

For the initial investigation on standby mode and receiving mode, no significant differences in spurious emissions were observed between these 2 modes. So test data for standby mode was omitted in this section.

9.1.6 TEST RESULTS (30MHz ~ 1000MHz)

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Power :	AC230V

	Frequency (MHz)	Ant H / V	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
802.11b	53.59	H	TX	-65.59	-54.00	-11.59	
	92.63	H	TX	-65.64	-54.00	-11.64	
	218.59	H	TX	-64.35	-54.00	-10.35	
	528.49	H	TX	-66.21	-54.00	-12.21	
	731.45	H	TX	-64.72	-54.00	-10.72	
	805.46	H	TX	-64.68	-54.00	-10.68	
802.11b	65.41	V	TX	-65.43	-54.00	-11.43	
	103.39	V	TX	-66.57	-54.00	-12.57	
	224.43	V	TX	-64.38	-54.00	-10.38	
	563.15	V	TX	-65.46	-54.00	-11.46	
	648.91	V	TX	-64.59	-54.00	-10.59	
	774.18	V	TX	-66.83	-54.00	-12.83	
802.11g	53.59	H	TX	-66.64	-54.00	-12.64	
	92.63	H	TX	-65.38	-54.00	-11.38	
	218.59	H	TX	-65.79	-54.00	-11.79	
	528.49	H	TX	-64.64	-54.00	-10.64	
	731.45	H	TX	-66.93	-54.00	-12.93	
	805.46	H	TX	-67.02	-54.00	-13.02	
802.11g	65.41	V	TX	-65.84	-54.00	-11.84	
	103.39	V	TX	-66.76	-54.00	-12.76	
	224.43	V	TX	-67.55	-54.00	-13.55	
	563.15	V	TX	-66.48	-54.00	-12.48	
	648.91	V	TX	-67.21	-54.00	-13.21	
	774.18	V	TX	-64.69	-54.00	-10.69	

Remark:

(2) Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(3) The EUT can't be operated in the standby mode and it's always keep continuously transmitting.

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Power :	AC230V

	Frequency (MHz)	Ant H / V	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
802.11n 20	53.59	H	TX	-66.75	-54.00	-12.75	
	92.63	H	TX	-65.84	-54.00	-11.84	
	218.59	H	TX	-67.22	-54.00	-13.22	
	528.49	H	TX	-65.95	-54.00	-11.95	
	731.45	H	TX	-64.82	-54.00	-10.82	
	805.46	H	TX	-65.78	-54.00	-11.78	
802.11n 20	65.41	V	TX	-65.57	-54.00	-11.57	
	103.39	V	TX	-66.16	-54.00	-12.16	
	224.43	V	TX	-66.48	-54.00	-12.48	
	563.15	V	TX	-65.39	-54.00	-11.39	
	648.91	V	TX	-64.58	-54.00	-10.58	
	774.18	V	TX	-65.74	-54.00	-11.74	
802.11n 40	53.59	H	TX	-66.49	-54.00	-12.49	
	92.63	H	TX	-65.58	-54.00	-11.58	
	218.59	H	TX	-66.43	-54.00	-12.43	
	528.49	H	TX	-67.72	-54.00	-13.72	
	731.45	H	TX	-66.04	-54.00	-12.04	
	805.46	H	TX	-65.82	-54.00	-11.82	
802.11n 40	65.41	V	TX	-64.54	-54.00	-10.54	
	103.39	V	TX	-65.35	-54.00	-11.35	
	224.43	V	TX	-66.79	-54.00	-12.79	
	563.15	V	TX	-65.16	-54.00	-11.16	
	648.91	V	TX	-66.44	-54.00	-12.44	
	774.18	V	TX	-67.35	-54.00	-13.35	

Remark:

(2) Data of measurement within this frequency range shown “* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(3) The EUT can't be operated in the standby mode and it's always keep continuously transmitting.

10. Spurious emissions – TRANSMITTER (above 1000MHz)

10.1 Applied procedures / limit

Clause	Test Item	Frequency range	Maximum power, e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	RBW/VBW
4.3.2	Spurious emissions (radiated)	30 MHz to 47 MHz	-36 dBm	100 kHz/300KHz
		47 MHz to 74 MHz	-54 dBm	100 kHz/300KHz
		74 MHz to 87,5 MHz	-36 dBm	100 kHz/300KHz
		87,5 MHz to 118 MHz	-54 dBm	100 kHz/300KHz
		118 MHz to 174 MHz	-36 dBm	100 kHz/300KHz
		174 MHz to 230 MHz	-54 dBm	100 kHz/300KHz
		230 MHz to 470 MHz	-36 dBm	100 kHz/300KHz
		470 MHz to 862 MHz	-54 dBm	100 kHz/300KHz
		862 MHz to 1 GHz	-36 dBm	100 kHz/300KHz
		1 GHz to 12,75 GHz	-30 dBm	1 MHz/3MHz

10.1.1 Measuring Instruments and Setting

Please refer to section 7.1.1 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	12750 MHz
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	1MHz / 3MHz

10.1.2 Test Procedures


- The EUT was placed on the top of the turntable in open test site area.
- The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- This measurement shall be repeated with the transmitter in standby mode where applicable.
- For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable.
- The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- Replace the EUT by standard antenna and feed the RF port by signal generator.
- Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.

j. If the level calculated in (9) is higher than limit by more than 6dB, then lower the RBW of the spectrum analyzer to 30KHz. If the level of this emission does not change by more than 2dB, then it is taken as narrowband emission, otherwise, wideband emission.

k. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

10.1.3 Test Setup Layout

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

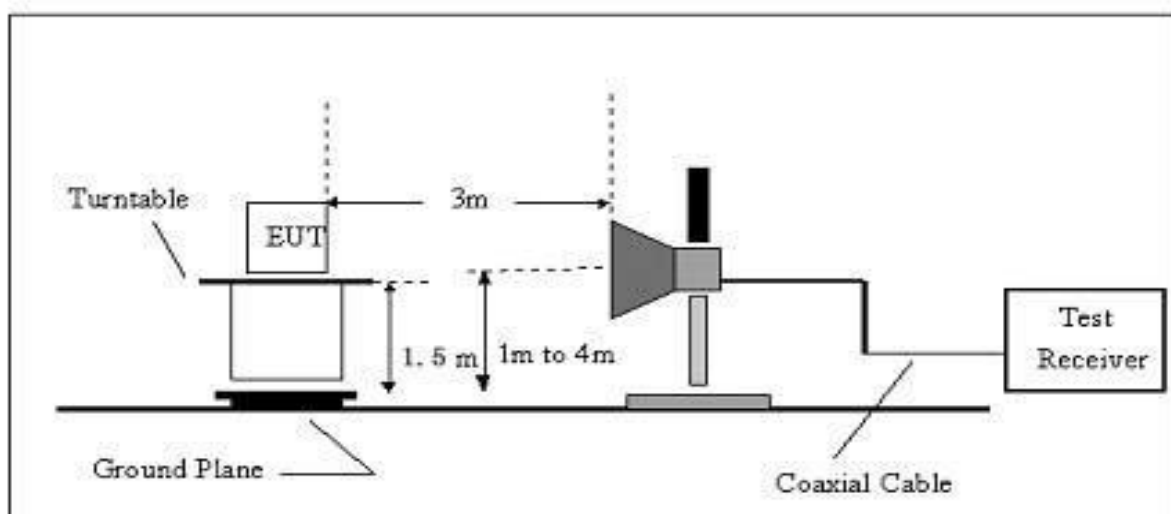

10.1.4 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

10.1.5 Results of Standby Mode Spurious Emissions

For the initial investigation on standby mode and receiving mode, no significant differences in spurious emissions were observed between these 2 modes. So test data for standby mode was omitted in this section.

10.1.6 TEST RESULTS

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Power :	AC230V (11b)

	Frequency	Ant	TX/RX	Measure d(FS)	Limits	Margins	Note
	(MHz)	H / V		(dBm)	(dBm)		
11B 2412MHz	4824.000	V	TX	-42.98	-30.00	-12.98	
	7236.000	V	TX	-40.74	-30.00	-10.74	

11B 2412MHz	4824.000	H	TX	-43.59	-30.00	-13.59	
	7236.000	H	TX	-40.93	-30.00	-10.93	

11B 2442MHz	4884.000	V	TX	-43.57	-30.00	-13.57	
	7326.000	V	TX	-40.26	-30.00	-10.26	

11B 2442MHz	4884.000	H	TX	-43.98	-30.00	-13.98	
	7326.000	H	TX	-40.75	-30.00	-10.75	

11B 2472MHz	4944.000	V	TX	-44.17	-30.00	-14.17	
	7416.500	V	TX	-39.36	-30.00	-9.36	

11B 2472MHz	4944.000	H	TX	-42.89	-30.00	-12.89	
	7416.500	H	TX	-41.43	-30.00	-11.43	

Note:

- (1)Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2)The EUT can't be operated in the standby mode and it's always keep continuously receiving.
- (3)Measuring frequency from 1GHz to 12.75GHz.

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	24 °C	Relative Humidity	54%
Pressure:	1010 hPa	Test Power :	AC230V (11 N20)

	Frequency	Ant	TX/RX	Measure d(FS)	Limits	Margins	Note
	(MHz)	H / V		(dBm)	(dBm)		
11G 2412MHz	4824.000	V	TX	-42.58	-30.00	-12.58	
	7236.000	V	TX	-40.04	-30.00	-10.04	

11G 2412MHz	4824.000	H	TX	-43.55	-30.00	-13.55	
	7236.000	H	TX	-40.67	-30.00	-10.67	

11G 2442MHz	4884.000	V	TX	-43.42	-30.00	-13.42	
	7326.000	V	TX	-41.43	-30.00	-11.43	

11G 2442MHz	4884.000	H	TX	-43.98	-30.00	-13.98	
	7326.000	H	TX	-42.06	-30.00	-12.06	

11G 2472MHz	4944.000	V	TX	-44.23	-30.00	-14.23	
	7416.500	V	TX	-40.75	-30.00	-10.75	

11G 2472MHz	4944.000	H	TX	-43.89	-30.00	-13.89	
	7416.500	H	TX	-41.67	-30.00	-11.67	

Note:

- (1)Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2)The EUT can't be operated in the standby mode and it's always keep continuously receiving.
- (3)Measuring frequency from 1GHz to 12.75GHz.

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	24 °C	Relative Humidity	54%
Pressure:	1010 hPa	Test Power :	AC230V (11 N20)

	Frequency (MHz)	Ant H / V	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
11 N20 2412MHz	4824.000	V	TX	-42.78	-30.00	-12.78	
	7236.000	V	TX	-41.34	-30.00	-11.34	

11 N20 2412MHz	4824.000	H	TX	-43.59	-30.00	-13.59	
	7236.000	H	TX	-40.04	-30.00	-10.04	

11 N20 2442MHz	4884.000	V	TX	-44.41	-30.00	-14.41	
	7326.000	V	TX	-40.29	-30.00	-10.29	

11 N20 2442MHz	4884.000	H	TX	-42.68	-30.00	-12.68	
	7326.000	H	TX	-41.53	-30.00	-11.53	

11 N20 2472MHz	4944.000	V	TX	-44.63	-30.00	-14.63	
	7416.500	V	TX	-42.51	-30.00	-12.51	

11 N20 2472MHz	4944.000	H	TX	-43.89	-30.00	-13.89	
	7416.500	H	TX	-41.52	-30.00	-11.52	

Note:

- (1)Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2)The EUT can't be operated in the standby mode and it's always keep continuously receiving.
- (3)Measuring frequency from 1GHz to 12.75GHz.

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	24 ℃	Relative Humidity	54%
Pressure:	1010 hPa	Test Power :	AC230V (11 N40)

	Frequency (MHz)	Ant H / V	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
11 N40 2422MHz	4844.000	V	TX	-43.79	-30.00	-13.79	
	7266.000	V	TX	-42.08	-30.00	-12.08	

11 N40 2422MHz	4844.000	H	TX	-44.72	-30.00	-14.72	
	7266.000	H	TX	-41.58	-30.00	-11.58	

11 N40 2442MHz	4884.000	V	TX	-43.77	-30.00	-13.77	
	7326.000	V	TX	-41.43	-30.00	-11.43	

11 N40 2442MHz	4884.000	H	TX	-42.89	-30.00	-12.89	
	7326.000	H	TX	-40.48	-30.00	-10.48	

11 N40 2472MHz	4924.000	V	TX	-43.11	-30.00	-13.11	
	7386.500	V	TX	-40.75	-30.00	-10.75	

11 N40 2472MHz	4924.000	H	TX	-43.95	-30.00	-13.95	
	7386.500	H	TX	-41.02	-30.00	-11.02	

Note:

- (1)Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2)The EUT can't be operated in the standby mode and it's always keep continuously receiving.
- (3)Measuring frequency from 1GHz to 12.75GHz.

11. Spurious emissions – RECEIVER (30-1000MHz)

11.1 Applied procedures / limit

Clause	Test Item	Frequency(MHz)	Limit
4.3.5	Spurious emissions	30-1000	-57dBm
	(radiated)	1000-12750	-47dBm

11.1.1 Measuring Instruments and Setting

Please refer to section 8.1.1 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	1000 MHz
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	100 kHz / 300 kHz

11.1.2 Test Procedures

- The EUT was placed on the top of the turntable in open test site area.
- The test shall be made in the receiving mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. .
- The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- Replace the EUT by standard antenna and feed the RF port by signal generator.
- Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- The level of the spurious emission is the power level of (7) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

11.1.3 Test Setup Layout

This test setup layout is the same as that shown in section 6.1.4

11.1.4 EUT Operation during Test

The EUT was programmed to be in continuously receiving mode.

11.1.5 TEST RESULTS (30MHz-1000MHz)

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	24 °C	Relative Humidity	54%
Pressure:	1010 hPa	Test Power :	AC230V

	Frequency (MHz)	Ant H / V	TX/RX	Measure d(FS) (dBm)	Limits (dBm)	Margins	Note
RX Mode	43.2100	V	RX	-64.58	-57.00	-7.58	
	99.5600	V	RX	-65.35	-57.00	-8.35	
	124.5800	V	RX	-64.41	-57.00	-7.41	
	187.5600	V	RX	-66.04	-57.00	-9.04	
	265.3200	V	RX	-65.35	-57.00	-8.35	
	488.0200	V	RX	-65.62	-57.00	-8.62	
RX Mode	43.2100	H	RX	-65.13	-57.00	-8.13	
	78.9500	H	RX	-64.53	-57.00	-7.53	
	99.7900	H	RX	-66.06	-57.00	-9.06	
	124.5600	H	RX	-65.21	-57.00	-8.21	
	412.7800	H	RX	-65.55	-57.00	-8.55	
	666.3300	H	RX	-64.46	-57.00	-7.46	

Note:

- (1) Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) The EUT can't be operated in the standby mode and it's always keep continuously receiving.

12. Spurious emissions – RECEIVER (above 1000MHz)

12.1 Applied procedures / limit

Clause	Test Item	Frequency(MHz)	Limit
4.3.5	Spurious emissions	30-1000	-57dBm
	(narrowband)	1000-12750	-47dBm

12.1.1 Measuring Instruments and Setting

Please refer to section 9.1.1 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	12750 MHz
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	1MHz / 3MHz

12.1.2 Test Procedures

- The EUT was placed on the top of the turntable in open test site area.
- The test shall be made in the receiving mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable.
- The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- Replace the EUT by standard antenna and feed the RF port by signal generator.
- Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- Adjust the power level of the signal generator to reach the same reading with Read Level (Raw). The level of the spurious emission is the power level of (7) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
- The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

12.1.3 Test Setup Layout

This test setup layout is the same as that shown in section 7.1.3

12.1.4 EUT Operation during Test

The EUT was programmed to be in continuously receiving mode.

12.1.5 TEST RESULTS (Above 1000MHz)

EUT:	Wireless Controller	Model Name :	ERC2203-W
Temperature:	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Power :	AC230V


	Frequency	EUT Axis	TX/RX	Measure d(FS)	Limits	Margins	Note
	(MHz)	(X/Y/Z)		(dBm)	(dBm)		
RX Mode	1679.300	X	RX	-60.78	-47.00	-13.78	
	3587.500	X	RX	-58.52	-47.00	-11.52	

	Frequency	EUT Axis	TX/RX	Measure d(FS)	Limits	Margins	Note
	(MHz)	(X/Y/Z)		(dBm)	(dBm)		
RX Mode	1679.300	X	RX	-59.95	-47.00	-12.95	
	3587.500	X	RX	-58.44	-47.00	-11.44	


Note:

- (1) Data of measurement within this frequency range shown “*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) The EUT can't be operated in the standby mode and it's always keep continuously receiving.
- (3) Measuring frequency from 1GHz to 12.75GHz.


13. PHOTOS OF THE EUT

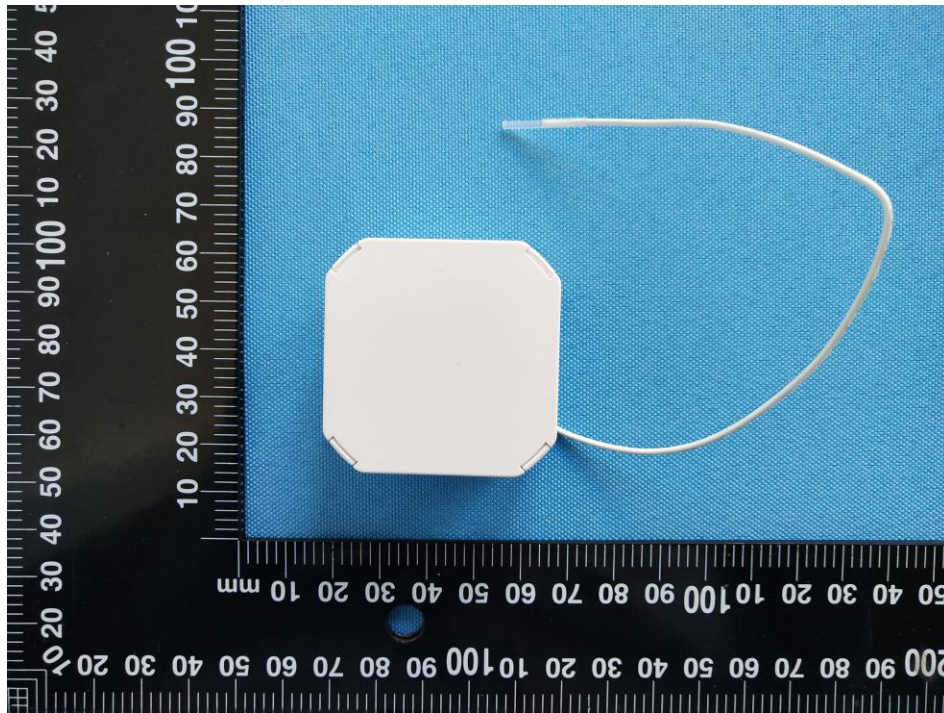


EUT Photo 1

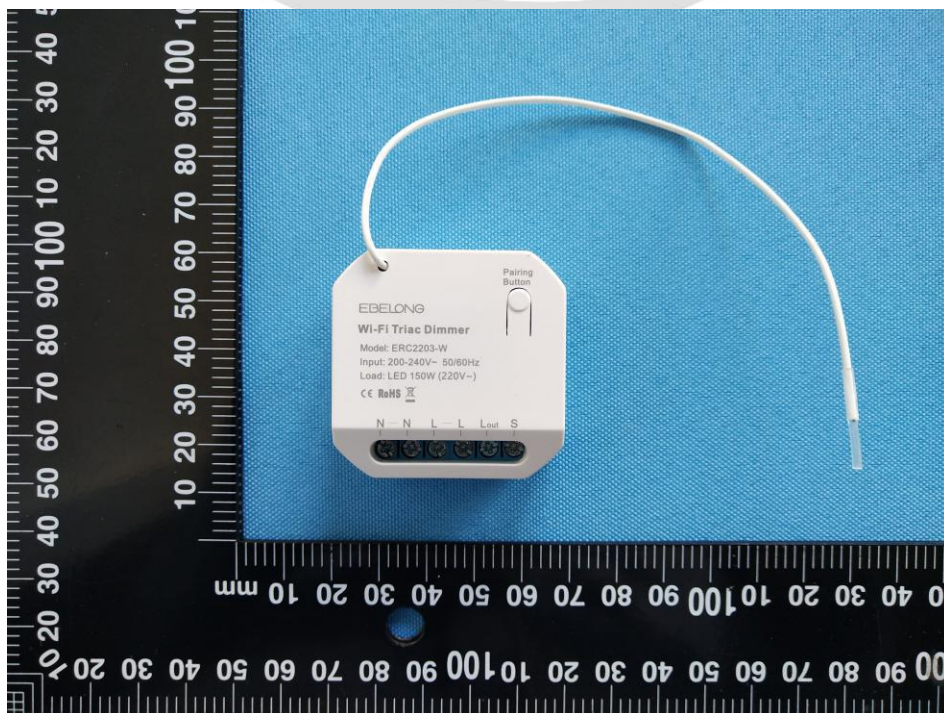


EUT Photo 2

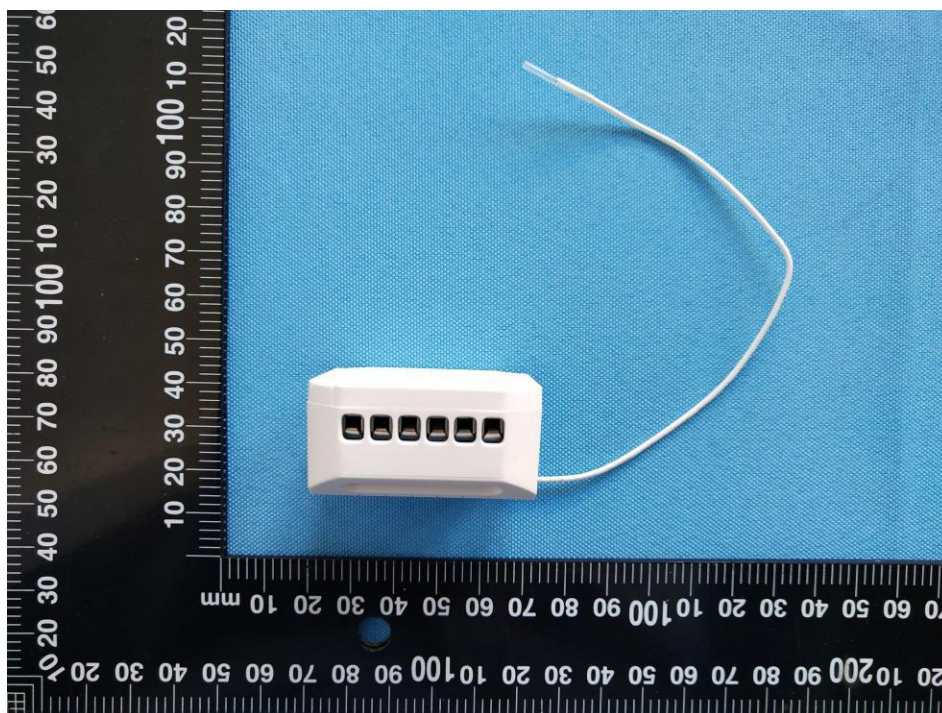


EUT Photo 3

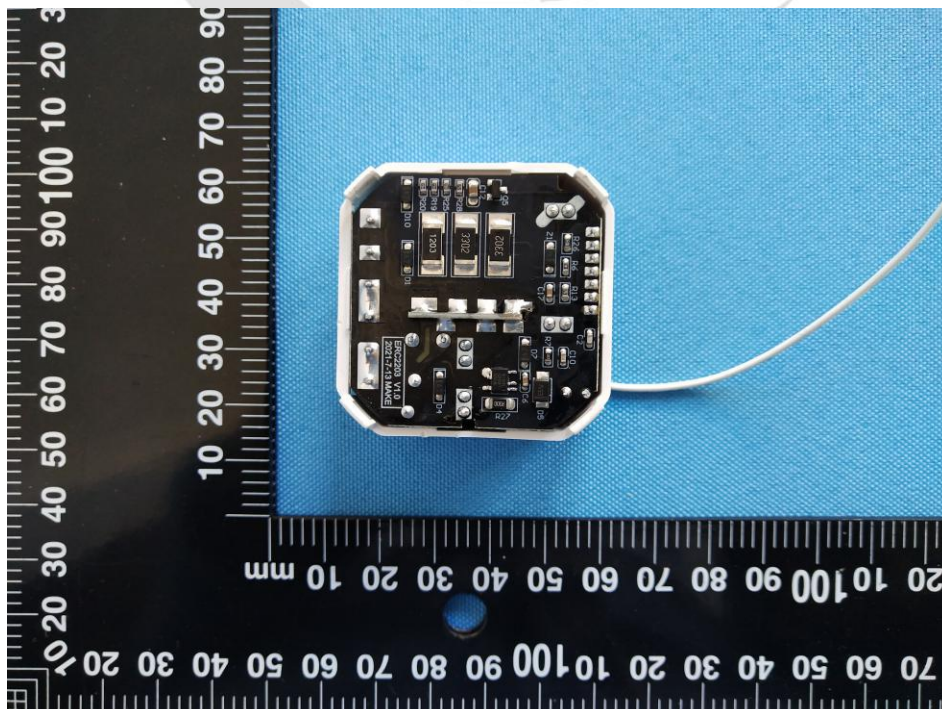


EUT Photo 4

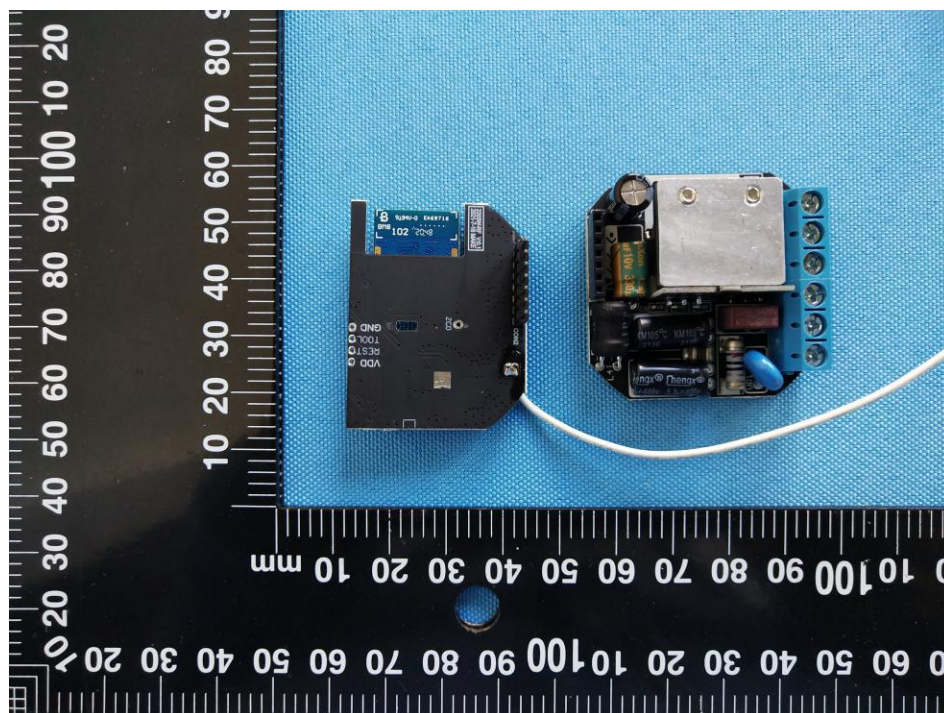


EUT Photo 5

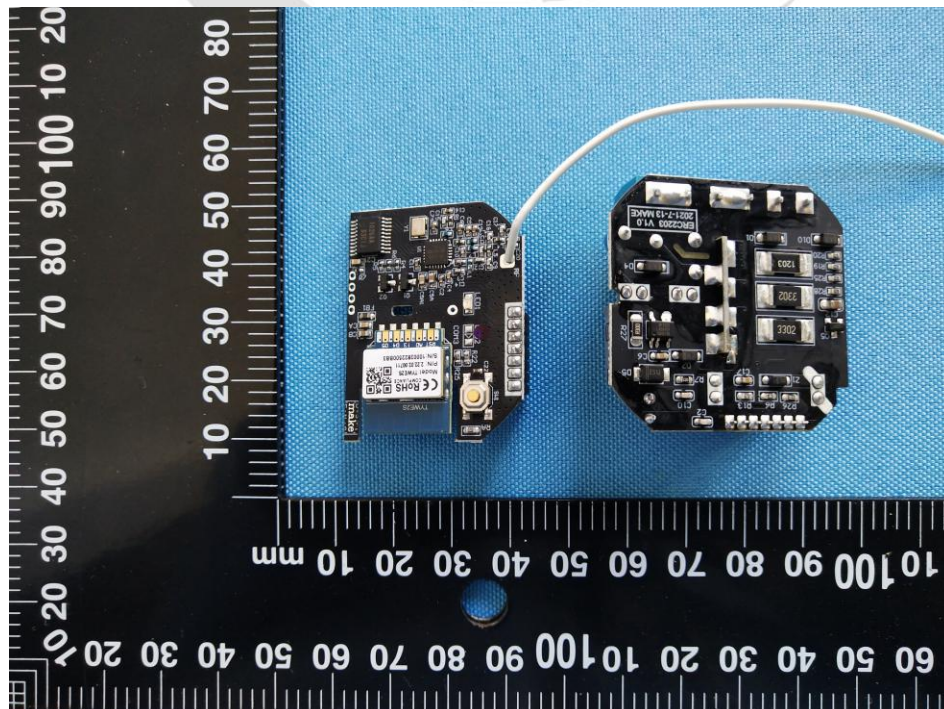

EUT Photo 6

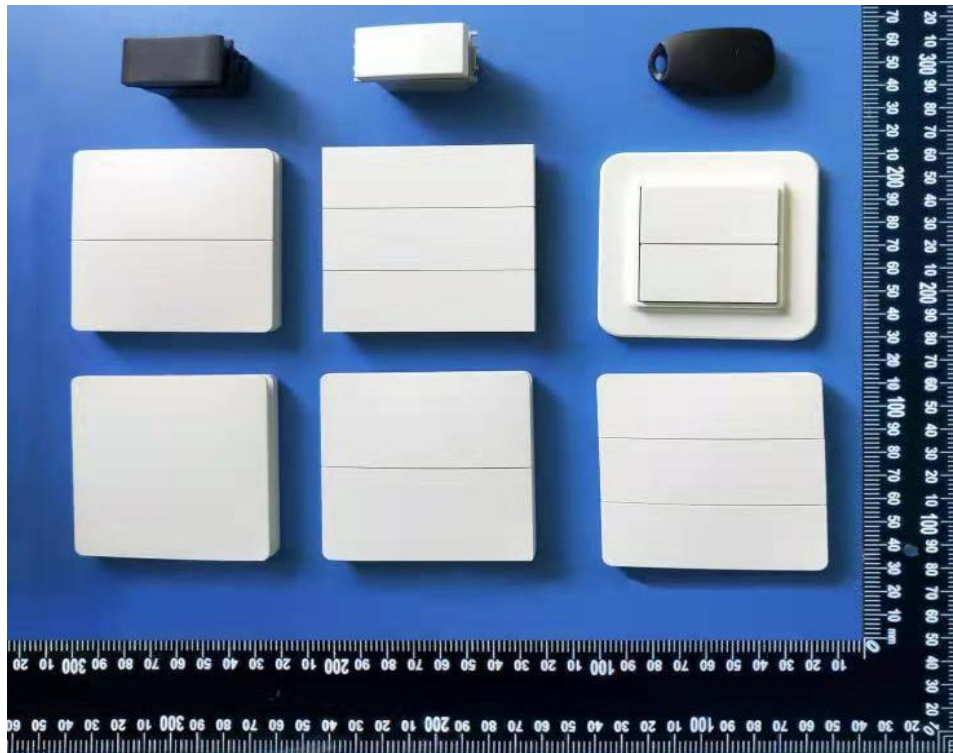

EUT Photo 7

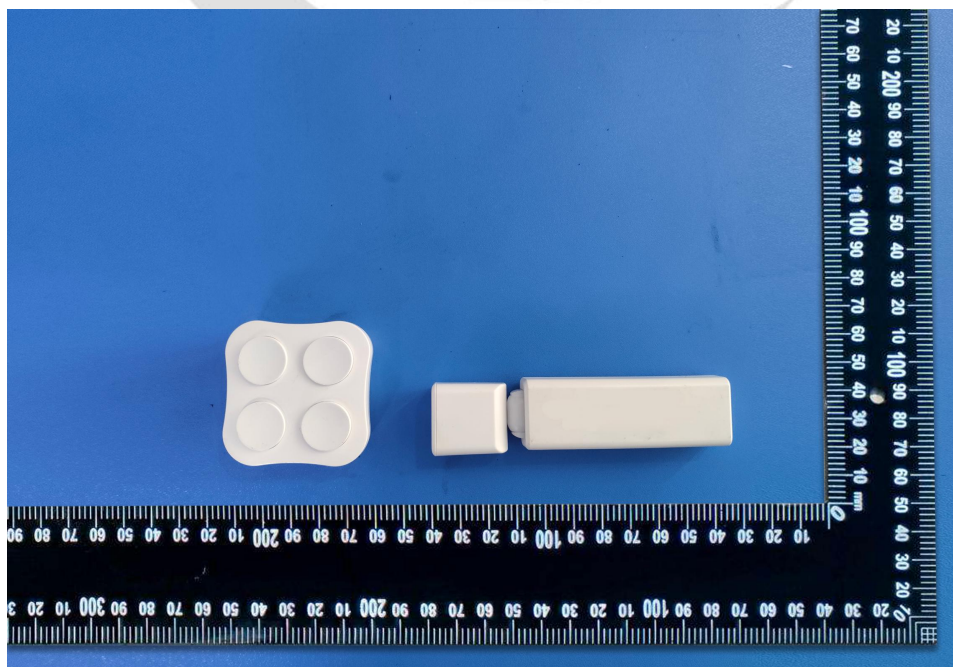

EUT Photo 8

14. TEST PHOTOGRAPH



EUT Test Photo

※※※※※ **END OF REPORT** ※※※※※

中鉴检测
CCTI TESTING