



# TEST REPORT

**EN 60669-2-1****Switches for household and similar fixed-electrical installations****Part 2-1: Particular requirements - Electronic switches****Report reference No**..... : CCTI-2021120302S**Date of issue** ..... : Dec. 13, 2021**Total number of pages**..... : 70**Testing Laboratory name**..... : Shenzhen CCTI Technology Co., Ltd.**Address**..... : 7th Floor, Block A, Building E, Yongwei Industrial Park, No. 118,  
Yongfu Road, Qiaotou, Fuhai Street, Bao'an District, Shenzhen,  
Guangdong, China.**Applicant's name** ..... : ShenZhen EBELONG Technology Co., Ltd**Address**..... : 4th Floor, Building No.2, Hengmingzhu shajing Industrial Park,  
Xiangxing Road, Bao'an District, ShenZhen GuangDong China**Test specification****Standard**..... : EN 60669-1: 2018  
EN 60669-2-1: 2004 + A1: 2009 + A12: 2010**Test procedure** ..... : Safety Report**Non-standard test method** ..... : N/A**Test Report Form No**..... : IEC60669\_2\_1H**TRF Originator** ..... : IMQ S.p.A.**Master TRF** ..... : Dated 2017-08

This report shall not be reproduced except in full, without the written approval of Shenzhen CCTI Technology Co., Ltd. This document may be altered or revised by Shenzhen CCTI Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

**Test item description** ..... : Wireless Controller**Trademark**..... : N/A**Manufacturer's name** ..... : ShenZhen EBELONG Technology Co., Ltd**Address**..... : 4th Floor, Building No.2, Hengmingzhu shajing Industrial Park,  
Xiangxing Road, Bao'an District, ShenZhen GuangDong China**Model and/or type reference**..... : ERC2203-W  
ERC2203,ERC2204,ERC2204-W,ERC2205,ERC2205-W,ERC2206,  
ERC2206-W**Rating(s)** ..... : Input: 200-240V~ 50/60Hz, 1.5A, 150W

**Testing procedure and testing location:**

**Testing Laboratory**.....: **Shenzhen CCTI Technology Co., Ltd.**

**Address**.....: 7th Floor, Block A, Building E, Yongwei Industrial Park,  
No. 118, Yongfu Road, Qiaotou, Fuhai Street, Bao'an  
District, Shenzhen, Guangdong, China..

**Date of Test**.....: Dec. 02, 2021 to Dec. 13, 2021

**Tested by (name + signature)**.....: Nick Chan

*Nick Chan*

**Reviewed by (name + signature)**.....: Sindy Wang

*Sindy Wang*

**Approved by (name + signature)**.....: Corey Mao



**中鉴检测**  
CCTI TESTING

List of Attachments (including a total number of pages in each attachment):

--Attachment 1: 10 pages for National differences (European Group Differences and National Differences according to EN 60669-2-1:2004 + A1: 2009 + A12:2010, EN 60669-1: 2018);

--Attachment 2: 4 pages for Photo documentation.

### Summary of testing:

#### Tests performed (name of test and test clause):

All applicable test

#### Testing location:

Shenzhen CCTI Technology Co., Ltd.

7th Floor, Block A, Building E, Yongwei Industrial Park, No. 118, Yongfu Road, Qiaotou, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.

### Summary of compliance with National Differences (List of countries addressed):


Group and national differences for CENELEC countries have been considered.

☒ The product fulfils the requirements of **EN 60669-2-1:2004 + A1:2009 + A12:2010, EN 60669-1: 2018**

### Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

(Additional requirements for markings. See 1.7 NOTE)

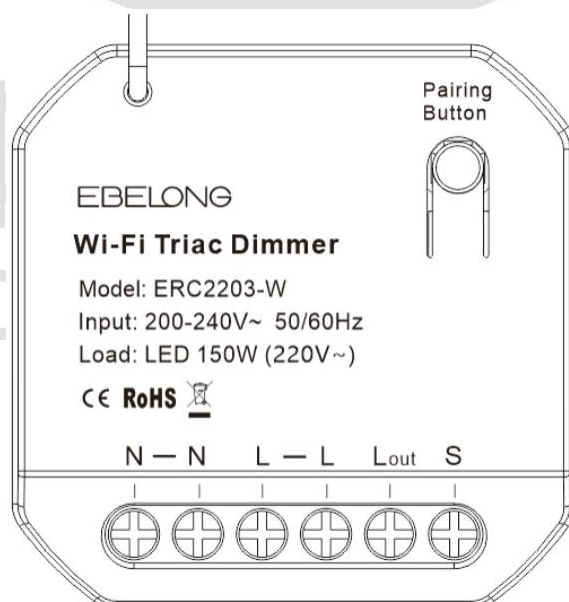

Remark on above marking:

1, The height of CE symbols is more than 5 mm; The height of WEEE symbols is more than 7 mm;

2, XXX means Importer name; YYY means Importer address.

<b>Test item particulars</b> .....	Wireless Controller
Type of electronic switch and its function (examples given in Annex AA) .....	Electronic switch
Pattern number .....	1
Contact opening (gap) and switch performance.....	<del>normal-gap / mini-gap / micro-gap / without contact gap</del> (semiconductor switching device)
Degree of protection against access to hazardous parts and against harmful effects due to the ingress of solid foreign objects .....	IP2X / IP4X / IP5X IPX0
Degree of protection against harmful effects due to the ingress of water .....	IPX0 / IPX4 / IPX5 IP0X
Method of actuating .....	<del>rotary / tumbler / rocker / push-button / cord-operated / momentary contact / touch / proximity / optical / acoustic / Electronic RCS / Electronic TDS / other</del> external influences wireless signal
Method of mounting .....	<del>surface-type / flush-type / semi flush-type / panel-type / architrave-type / height &gt; 1,7 m Built-in type</del>
Method of installation .....	design A / design B
Type of terminals .....	<del>screw-type / screwless (rigid) / screwless (rigid and flexible)</del>
Flexible cable outlet .....	without / with
Rated current (A) / Rated load (VA or W) .....	See page 1
Minimum current (A) / Minimum load (VA or W).....	N/A
Kind of load controlled by the switch .....	incandescent lamp / fluorescent lamps / motors / declared load resistive load
Type of switching mechanism .....	<del>directly operated / sequentially operated / bistable / monostable (only for RCS)</del>
Kind of energization of the control circuit .....	Electronic RCS energized by impulses / Electronics- RCS permanently energized
Type of control mechanism.....	mechanical / thermal / pneumatic / hydraulic / electrical / combination(s) of the previous (only TDS)
Rated control voltage (V) .....	a.c. / d.c.
Rated control current (A) .....	a.c. / d.c.
Rated voltage (V) .....	200-240V
Rated frequency (Hz) .....	50/60Hz
Characteristic of fuses .....	Protected by external circuit breaker (EN 60898-1, breaking capacity $\geq 1\ 500\ A$ ), details see next page
Electronics RCS or TDS having .....	SELV parts / PELV parts
<b>Possible test case verdicts</b> .....	
test case does not apply to the test object .....	N/A
test object does meet the requirement.....	P (Pass)
test object does not meet the requirement.....	F (Fail)
<b>Testing</b> .....	

Date of receipt of test item.....: Dec. 02, 2021

Date (s) of performance of tests .....: Dec. 02, 2021 to Dec. 13, 2021

**General remarks:**

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

**Manufacturer's Declaration per sub-clause 4.2.5 of IEC60335-1:**

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:

☐ **Yes**
☒ **Not applicable**
**When differences exist; they shall be identified in the General product information section.**
**General product information:**

1. This is a built-in type electronic switch and the electric shock is protected by the end product. The product is belongs to class II appliance.
2. This product is Protected by an external circuit breaker (EN 60898-1, breaking capacity  $\geq 1500$  A). Terminals COM, S1, S2, S3 and RST are dangerous voltage, details see manual.
3. All models have same diagram circuit, the different between them are number of circuit loading and model name.
4. All tests are carried out on model ERC2203-W.
5. The Max. Ambient temperature is considered as 55°C.
6. Note: The following is the wireless switch model used with the test sample.  
EE2454-2R,EE2411-2R,EE2254-2R,EE2211-2R,EP1454,EP1439,ES3154-1R,ES3254-1R,ES3454-2R,ES2154,ES2254,ES2354,ES2111,ES2211,ES2311,ES2100,ES2200,ES2300,EM1354,EM1360,EM1380,BM6,BM7,P1,D1,ED154,ED100.

CCTI TESTING

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>8</b>	<b>MARKING</b>		<b>P</b>
8.1	Switches marked with:		P
	- rated voltage (V) .....	200-240V	P
	- rated control voltage, if different from rated voltage (V) .....		N/A
	- rated current (A) or rated load (VA or W) .....	150W	P
	- symbol for nature of supply .....	~	P
	- manufacturer's or responsible vendor's name, trade mark or identification mark .....	See page 3	P
	- type reference .....	See page 3	P
	- symbol for mini-gap construction (m) .....		N/A
	- symbol for micro-gap construction ( $\mu$ ) .....		P
	- symbol for semiconductor switching device ( $\epsilon$ ) .....		N/A
	- first IP characteristic numeral, if declared higher than 2, in which case the second characteristic numeral is also marked .....	IP20	P
	- second IP characteristic numeral, if declared higher than 0, in which case the first characteristic numeral is also marked .....	IP20	P
	- rated frequency (Hz) .....	50/60	P
	- rating and type of any fuse incorporated .....		N/A
	- symbol for kind of load (see 8.2)	incandescent lamp	N/A
	- the term "extension unit", if applicable, followed by the identifying reference .....		N/A
	- the minimum height for mounting the switch indicated in the installation instruction if there is a restriction (see 10.1) .....		N/A
	Switches with screwless terminals: marked with an indication of the suitability to accept rigid conductors only (if any) .....		P
	General purpose electronic switches with included automatic function, number of operations shall be stated in the accompanying instruction sheet when number of operation is higher than the indicated in sub clause 19.101, 19.102 and 19.104.		N/A
	- symbol for the adjustment of the delay time, if applicable .....		N/A
	- symbol for the positions "Permanent on" and "Permanent off", if applicable .....		N/A
	- symbol for "Delay time" .....		N/A
8.2	Symbols used: as required in the standard		P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Marking for the nature of supply placed next to the marking for rated current and rated voltage		P
	Other particular symbols used are explained in the installation instructions		P
8.3	Marking of electronic switch placed on the main part:		P
	- rated current or rated load, rated voltage, symbol for nature of supply, rated frequency (if any), type of load, rating and type of any incorporated fuse (marked on the fuse-holder or in proximity of the fuse)		P
	- either the name, trade mark, or identification mark of the manufacturer or of the responsible vendor		P
	- length of insulation to be removed, if any		P
	- symbol for mini-gap construction, micro-gap construction or semiconductor switching device, if applicable		P
	- type reference		P
	Information concerning more than one type of load not already marked on the electronic switch are stated in the accompanying instruction sheet		N/A
	Minimum and maximum current/load are stated for each type of load		N/A
	Information of the iron core transformer intended to be used with the electronic switch are given in the instruction sheet		N/A
	Cover plates necessary for safety purposes and intended to be sold separately: marked with the manufacturer's or responsible vendor's name, trade mark or identification mark and type reference		N/A
	IP code, when applicable, marked so as to be easily discernible when the switch is mounted and wired as in normal use		N/A
	Marking clearly visible and easily legible		P
	Markings are placed on parts which cannot be removed without the use of a tool		P
8.4	Terminals for phase conductors (supply conductors): identified unless method of connection is of no importance, self-evident or indicated on a wiring diagram		P
	Indications not placed on screws or other easily removable part		P
	Terminals associated with any one pole for switches of pattern number 2, 3, 03 and 6/2: similar identification differing from that of terminals associated with other poles		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Switches with more than two terminals: load terminal marked with an arrow pointing away from		P
	the terminal or with one of the symbol mentioned in 8.2		
	Other terminals marked corresponding to the installation instructions		P
	Installation not made clear by the markings: a wiring diagram is provided with each electronic switch		N/A
	Terminals for the control circuit of a priority RCS with a current sensitive coil or voltage sensitive coil are marked with the appropriate symbol indicated in 8.2		N/A
	Terminals for the control circuit: marked according to IEC 60445 and/or with the symbols according to 8.2		N/A
8.5	Neutral terminals: N.....:		P
	Earthing terminals: [earth symbol] .....		N/A
	Markings not placed on screws or other easily removable parts		P
	Terminals for conductors not forming part of the main function of the switch:		P
	- clearly identified unless their purpose is self-evident, or		P
	- indicated in a wiring diagram fixed to the accessory		N/A
	Identification of equipment terminals may be achieved by:		P
	- their marking with graphical symbols according to IEC 60417 or colours and/or alphanumeric system, or		P
	- their physical dimension or relative location		P
8.6	Switches marked to indicate the switch position: they are so marked that the direction of movement of the actuating member to its different positions or the actual position is clearly indicated .....	No actuating member	N/A
	Switches having more than one actuating member: marking indicates the effect achieved by the operation		N/A
	Marking clearly visible on the front of the switch		N/A
	Not possible to fix cover, cover plate, or removable actuating members in an incorrect position		N/A
	Symbols for "on" and "off" not used for indication of switch positions unless clearly indicate the direction of movement of the actuating members		N/A
	Off-state not marked with an "O" if the circuit on the load side is considered as live		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.6.101	Actual state of electronic switches intended to control the brightness of lamps is indicated		N/A
	- marking on the on-/off-state position		N/A
	- indicator lamp		N/A
	- adjusting the lamp dimmer in the lowest control state and at rated voltage minus 10%: light still visible		N/A
	When the indication of the electronic switch state is given only by the lamp, adjustment of the lamp at the lowest control state is made as specified in the following:		N/A
	- for incandescent lamps:		N/A
	the adjustment of lamp dimmers is made by the manufacturer		N/A
	not possible to reduce the lowest setting without a tool		N/A
	- for fluorescent lamps:		N/A
	the adjustment of lamp dimmers is made by the manufacturer		N/A
	it is possible for the installer to alter the lowest setting if indicated in an installation instruction		N/A
8.7	Red colour only for push-button to open the circuit		N/A
8.8	Special precautions necessary to take when installing the switch: details of these and clear information given in an instruction sheet which accompanies the switch		N/A
	Electronic switch containing a viewing window (lens) intended to be mounted at a height greater 1.7 m: information stated in the instruction sheet		N/A
8.9	Marking durable and easily legible. Test: 15 s with water and 15 s with petroleum spirit		P

<b>9</b>	<b>CHECKING OF DIMENSIONS</b>	Built-in type	<b>N/A</b>
	Switches and boxes comply with the appropriate standard sheets, if any		N/A
	Electronic switches with dimensions other than those specified in the standard sheets (if any) if they are supplied with suitable boxes		N/A

<b>10</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK</b>		<b>N/A</b>
10.1	Switches: live parts not accessible	Built-in type switch, can't be accessible, the electric shock shall be protected by end product.	N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Switches designed to be fitted with pilot lights supplied at voltages other than ELV have means to prevent direct contact with the lamp		N/A
	Test with standard test finger shown in figure 1 of IEC 60529		N/A
	Switches with thermoplastic or elastomeric material: additional test carried out at $35\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$ with the test probe 11 of IEC 61032 (75 N for 1 min)		N/A
	Test probe applied to:		N/A
	- thin-walled knock-outs with a force of 10 N		N/A
	- viewing windows or the like on electronic switches intended to be mounted at a height $> 1,7\text{ m}$ with a force of 30 N		N/A
	During the test: switches not deform and no live parts accessible		N/A
10.2	Knobs, operating levers, push buttons, rockers and the like: of insulating material, unless:		N/A
	- accessible metal parts separated from metal parts of mechanism by double or reinforced insulation, or		N/A
	- reliably connected to earth		N/A
	For touch sensitive electronic switches the associated protective impedance does not have to comply with the requirements of clauses 16 and 23		N/A
	Accessible parts (for example, sensing surface) of electronic switches with IPX0 are connected to live parts by means of a protective impedance that:		N/A
	- consists of at least two independent resistors or independent capacitors in series of the same nominal value, or a combination of both		N/A
	- resistors comply with 102.3		N/A
	- capacitors comply with 102.2		N/A
	The removal of protective impedance is only possible by destruction of the electronic switch or by rendering it unusable		N/A
	Test carried out between accessible metal parts and earth, through a non-inductive resistor of $2\text{ k}\Omega$ :		N/A
	current measured: $\leq 0,7\text{ mA}$ (peak value), for a.c. up to $1\text{ kHz}$ .....		N/A
	current measured: $\leq 0,7\text{ mA}$ multiplied by the value of frequency in kHz, but not exceed $70\text{ mA}$ , for a.c. above $1\text{ kHz}$ .....		N/A
	current measured: $\leq 2\text{ mA}$ , for d.c. ....		N/A
10.3	Accessible parts of switches with $I_n \leq 16\text{ A}$ : made of insulating material		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.3.1	Metal covers or cover plates protected by supplementary insulation made by insulating linings or insulating barriers		N/A
	Insulating linings or insulating barriers:		N/A
	- cannot be removed without being permanently damaged, or designed that		N/A
	- cannot be replaced in an incorrect position; if they are omitted, accessories are rendered inoperable or manifestly incomplete; there is no risk of accidental contact between live parts and metal covers or cover plates; precautions are taken to prevent creepage distances or clearances becoming less than the values specified in clause 23		N/A
10.3.2	Earthing of metal covers or cover plates: connection of low resistance		N/A
10.4	Metal parts of mechanism not insulated from live parts: not protrude from enclosure		N/A
	Switches operated by means of a removable key or similar device: metal parts of mechanism insulated from live parts		N/A
10.5	Metal parts of mechanism not accessible and insulated from accessible metal parts, unless		N/A
	- separated from live parts (creepage distances and clearances have at least twice the value specified in clause 23), or		N/A
	- reliably connected to earth		N/A
10.6	Switches operated by means of a removable key or an intermediate part: key or an intermediate part can only touch parts insulated from live parts		N/A
	key or intermediate part: insulated from metal parts of mechanism, unless		N/A
	creepage distances and clearances between live parts and metal parts of mechanism have at least twice the values specified in clause 23		N/A
10.7	Cord-operated switches: impossible to touch live parts when fitting or replacing the pull cord		N/A
10.101	If a cover or cover-plate or a fuse can be removed without a tool or if the installation instructions for the user indicate that, for the purpose of maintenance, when replacing the fuse, covers and cover plates fastened by means of a tool have to be removed, the protection against contact with live parts is assured even after removal of cover or cover-plate (this requirement does not apply when the electronic switch must be dismantled from its supporting means for the replacement of the fuse-link)		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Compliance is checked with the test probe B of IEC 61032 (10 N); test probe does not touch live parts		N/A
10.102	Hole in electronic switches for adjusting the setting:		N/A
	The adjustment does not involve the risk of an electric shock		N/A
	Compliance is checked by applying a test pin according to figure 101 through the hole; test pin does not touch live parts		N/A
10.103	Ventilation openings over live parts:		N/A
	A foreign body introduced into these openings do not come into contact with any live parts		N/A
	Compliance is checked by applying the test probe 13 of IEC 61032 through the openings; pin of test probe does not touch live parts		N/A

<b>11</b>	<b>PROVISION FOR EARTHING</b>	class II appliance	<b>N/A</b>
	Clause not applicable to SELV electronic switches		N/A
11.1	Accessible metal parts: provided with, or permanently and reliably connected to, an earthing terminal		N/A
11.2	Earthing terminals: with screw clamping or screwless terminals and comply with clause 12		N/A
	Capacity of earthing terminals of the same size as the corresponding terminals for the supply conductors		N/A
	Any additional external earthing terminal has a size suitable for conductors of at least 6 mm <sup>2</sup> (mm <sup>2</sup> ) .....		N/A
11.3	Surface-type switches with an enclosure of insulating material, with IP > X0 and more than one cable inlet, are provided for the continuity of the earthing circuit with:		N/A
	- an internal fixed earthing terminal, or		N/A
	- adequate space for a floating terminal allowing the connection of an incoming and outgoing conductor		N/A
11.4	Connection between earthing terminal and accessible metal parts: of low resistance		N/A
	Test current equal to 1,5 I <sub>n</sub> or 25 A (A) .....		—
	Resistance ≤ 0,05 Ω (Ω) .....		N/A

<b>12</b>	<b>TERMINALS</b>	Approved terminal used	<b>P</b>
12.1	General		P
	Switches provided with screw-type terminals or with screwless terminals .....		P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
		Screwless terminal	
	Clamping means of terminals: not serve to fix any other components		P
	All the test on terminals, with the exception of the test of 12.3 11, made after the test of 15.1		N/A
	Terminals having screw clamping complying with IEC 60998-2-1 are considered to be in compliance with the requirements and the tests of Subclause 12.2, except those of 12.2.6 and 12.2.7 and 12.2.8, provided they are chosen according Table 2.		N/A
12.2	Terminals with screw clamping for external copper conductors		N/A
12.2.1	Switches provided with terminals which allows the proper connection of copper conductors as shows in table 2		N/A
	Rated current (A) .....		—
	Type of conductor (rigid / flexible) .....		—
	Smallest / largest cross-sectional area (mm <sup>2</sup> ) .....		—
	Diameter of largest conductor (mm) .....		—
	Figure of terminal .....	1 / 2 / 3 / 4 / 5	—
	Minimum diameter D (minimum dimensions) of conductor space: required (mm); measured (mm) ....		N/A
12.2.2	Terminals allow the conductor to be connected without special preparation		N/A
12.2.3	Terminals have adequate mechanical strength		N/A
	Screws and nut for clamping the conductors have metric ISO thread or a comparable thread		N/A
	Screws not of soft metal such as zinc or aluminium		N/A
12.2.4	Terminals resistant to corrosion		N/A
12.2.5	Screw-type terminals clamp the conductor(s) without undue damage	See appended table 12.2.5	N/A
	During the test: conductor not slip out, no break near clamping unit and no damage		N/A
12.2.6	Terminals clamp the conductor reliably between metal surfaces	See appended table 12.2.6	N/A
	During the test: conductor not move noticeably		N/A
12.2.7	Terminals designed or placed that the conductor cannot slip out while the clamping screws or nuts are tightened	See appended table 12.2.7	N/A
	After the test: no wire of the conductor escaped outside the clamping unit thus reducing creepage distances and clearances to values lower than those indicated in clause 23		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
12.2.8	Terminals not work loose from their fixing to the switch		N/A
	Torque test:		N/A
	- rated current (A) .....		—
	- solid rigid copper conductor of the largest cross-sectional area (mm <sup>2</sup> ) (table 2) .....		—
	- torque (Nm) (table 3 or appropriate figures 1, 2, 3, 4) .....		—
	Screws and nuts tightened and loosened 5 times. During the test: terminals not work loose and show no damage		N/A
12.2.9	Clamping screws or nuts of earthing terminals: adequately locked against accidental loosening, not possible to loosen them without the aid of a tool		N/A
12.2.10	Earthing terminals: no risk of corrosion		N/A
	Body of brass or other metal no less resistant to corrosion		N/A
	If the body is a part of a frame or enclosure of aluminium alloy, precautions are taken to avoid the risk of corrosion		N/A
12.2.11	Pillar terminals: distance g no less than the value specified in figure 1: required (mm); measured (mm) .....		N/A
	Mantle terminals: distance g no less than the value specified in figure 5: required (mm); measured (mm) .....		N/A
12.2.12	Lug terminals:		N/A
	- used only for switches having rated current $\geq 40$ A		N/A
	- fitted with spring washers or equally effective locking means		N/A
12.3	Screwless terminals for external copper conductors		N/A
12.3.1	Screwless terminals of the type suitable for:		N/A
	- for rigid copper conductors only, or		N/A
	- for both rigid and flexible copper conductors (tests carried out with rigid and then repeated with flexible conductors)		N/A
12.3.2	Screwless terminals provided with clamping units which allow the proper connection of rigid or of rigid and flexible conductors having nominal cross-sectional areas as shown in table 7		N/A
	Rated current (A) .....		—
	Type of conductor (rigid / flexible) .....		—

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Smallest / largest cross-sectional area (mm <sup>2</sup> ) .....		—
	Diameter of largest rigid conductor (mm) .....		—
	Diameter of largest flexible conductor (mm) .....		—
12.3.3	Screwless terminals allow the conductor to be connected without special preparation		N/A
12.3.4	Parts of screwless terminals intended for carrying current of materials as specified in 22.5		N/A
12.3.5	Screwless terminals clamp specified conductors with sufficient contact pressure without undue damage to the conductor		N/A
	Conductor clamped between metal surfaces		N/A
12.3.6	It is clear how the connection and disconnection of the conductors is to be made		N/A
	Disconnection of a conductor require an operation, other than a pull, so that can be made manually with or without a general-purpose tool		N/A
	It is not possible to confuse the opening for the use of a tool with the opening intended for the conductor		N/A
12.3.7	Screwless terminals intended for the interconnection of two or more conductors:		N/A
	- during insertion, operation of clamping means of one of the conductors is independent of operation of that for the other conductor(s);		N/A
	- during disconnection, conductors can be disconnected either at the same time or separately;		N/A
	- each conductor introduced in a separate clamping unit.		N/A
	It is possible clamp securely any number of conductors up to the maximum as designed. Number of conductors; Nominal cross-sectional area (mm <sup>2</sup> ) .....		N/A
12.3.8	Screwless terminals: adequate insertion obvious and over-insertion prevented		N/A
	Screwless terminals of switches: undue insertion of the conductor prevented by a stop if further insertion is liable to reduce creepage distances and/or clearances required in table 20 or to influence the mechanism		N/A
12.3.9	Screwless terminals properly fixed to the switch		N/A
	Not work loose when conductors are connected or disconnected		N/A
	Self-hardening resins used to fix terminals not subject to mechanical stress		N/A
12.3.10	Screwless terminals withstand mechanical stresses occurring in normal use	See appended table 12.3.10	N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	During application of the pull conductor not come out of the terminal		N/A
	Test with apparatus shown in figure 10	See appended table 12.3.10	N/A
	During the test conductors not move noticeably in the clamping unit		N/A
	After these tests: neither terminals nor clamping means have worked loose and conductors show no deterioration		N/A
12.3.11	Screwless terminals withstand electrical and thermal stresses occurring in normal use	See appended table 12.3.11	N/A
	After the test: inspection show no changes		N/A
	Repetition of test according to 12.3.10: screwless terminals withstand mechanical stresses occurring in normal use	See appended table 12.3.11	N/A
	During application of the pull conductor not come out of the terminal		N/A
	Test with apparatus shown in figure 10	See appended table 12.3.11	N/A
	During the test conductors not move noticeably in the clamping unit		N/A
	After these tests: neither terminals nor clamping means have worked loose and conductors show no deterioration		N/A
12.3.12	Screwless terminals: connected rigid solid conductor remains clamped, even when deflected during normal installation	See appended table 12.3.12	N/A

<b>13</b>	<b>CONSTRUCTIONAL REQUIREMENTS</b>		<b>P</b>
13.1	Insulating lining, barriers and like: adequate mechanical strength and secured in a reliable manner		P
13.2	Switches constructed so as to permit:		P
	- easy introduction and connection of the conductors in the terminals;		P
	- correct positioning of the conductors		P
	- easy fixing of the switch to a wall or in a box		P
	- adequate space between underside of the base and the surface on which the base is mounted or between the sides of the base and the enclosure (cover or box)	Built-in type	N/A
	Surface-type switches: fixing means do not damage insulation of the cable		N/A
	Switches classified as design A: permit easy positioning and removal of the cover or cover plate, without displacing the conductors		P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
13.3	Covers, cover-plates and actuating members or parts of them intended to ensure protection against electric shock:		N/A
	- held in place at two or more points by effective fixings	Built-in type	N/A
	- fixed by means of a single fixing, for example by a screw, provided that they are located by another means (for example by a shoulder)		N/A
	Fixings of covers, cover-plates or actuating members of switches of design A serves to fix the base: there is means to maintain the base in position, even after removal of the covers, cover-plates or actuating members		N/A
13.3.1	Covers, cover plates or actuating members whose fixing is of the screw-type:		N/A
	Compliance checked by inspection only		N/A
13.3.2	Covers, cover plates or actuating members whose fixing is not dependent on screws and whose removal is obtained by applying a force in a direction approximately perpendicular to the mounting/supporting surface:		N/A
	Compliance checked, when their removal may give access, with the standard test finger:		N/A
	to live parts: by the test of 20.4 (verification of the non-removal and the removal)		N/A
	to non-earthed metal parts separated from live parts by creepage distances and clearances according to table 20: by the test of 20.5 (verification of the non-removal and the removal)		N/A
	only to insulating parts, or earthed metal parts, or metal parts separated from live parts by creepage distances and clearances twice those according to table 20, or live parts of SELV circuits not greater than 25 V a.c.: by the test of 20.6 (verification of the non-removal and the removal)		N/A
13.3.3	Covers, cover-plates or actuating members whose fixing is not dependent on screws and whose removal is obtained by using a tool, in accordance with the manufacturer's information given in an instruction sheet or in a catalogue:		N/A
	Compliance checked, when their removal may give access, with the standard test finger:		N/A
	to live parts: by the test of 20.4 (verification of the non-removal only)		N/A
	to non-earthed metal parts separated from live parts by creepage distances and clearances according to table 20: by the test of 20.5 (verification of the non-removal only)		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	only to insulating parts, or earthed metal parts, or metal parts separated from live parts by creepage distances and clearances twice those according to table 20, or live parts of SELV circuits not greater than 25 V a.c.: by the test of 20.6 (verification of the non-removal only)		N/A
13.4	Switches: no free openings in their enclosures according to their IP classification	IP20	P
	Free openings according to 10.102 and 10.103 are accepted		N/A
13.5	Knobs of electronic switches are securely fixed in a reliable manner		N/A
	knobs used to indicate the position of switches: not possible to fix them in a wrong position, if this may result in a hazard		N/A
	Pull and push tests:		N/A
	- axial pull is likely to be applied: 30 N for 1 min		N/A
	- axial pull is unlikely to be applied: 15 N for 1 min		N/A
	- axial push: 30 N for 1 min		N/A
	During and after these tests:		N/A
	- the electronic switch shows no damage		N/A
	- an knob have not moved so as to impair compliance with this standard		N/A
13.6	Screws or other means for mounting the switch on a surface or in a box or enclosure: easily accessible from the front.		N/A
	Fixing means not serve any other fixing purpose		N/A
13.7	Combinations of switches, or of switches and socket-outlets, comprising separate bases: correct position of each base ensured		N/A
	Fixing of each base independent of the fixing of the combination to the mounting surface		N/A
13.8	Accessories combined with switches: comply with their standard		N/A
13.9	Surface-type switches with IP > 20 are in according to their classification when fitted with conduits or with sheathed cables		N/A
	Surface-type switches with IPX4 or IPX5 have provisions for opening a drain hole		N/A
	Switches provided with a drain hole: it is not less than 5 mm in diameter, or 20 mm <sup>2</sup> in area with a width and a length not less than 3 mm .....		N/A
	Drain hole: effective		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Lid springs (if any): of corrosion resistant material (bronze or stainless steel)		N/A
13.10	Switches to be installed in a box: conductor ends can be prepared after the box is mounted in position, but before the switch is fitted in the box	Built-in type	P
	Base have adequate stability when mounted in the box		P
13.11	Surface-type switches with IP > X0, pattern numbers 1, 5 and 6, with more than one inlet opening, provided with:		N/A
	- fixed additional terminal complying with the requirements of clause 12, or		N/A
	- adequate space for a floating terminal		N/A
13.12	Inlet openings: allow the introduction of the conduit or the sheath of the cable		N/A
	Surface-type switches: intended conduit or protective covering can enter at least 1 mm into the enclosure		N/A
	Inlet openings for conduit entries of surface-type switches: capable of accepting conduit sizes of 16, 20, 25 or 32 or a combination of at least two of these sizes not excluding two of the same size .....		N/A
	Inlet openings for cable entries of surface-type switches: capable of accepting cables having the dimensions specified in table 12 or be as specified by the manufacturer: rated current (A); limits of external diameter of cables min/max (mm) .....		N/A
13.13	Surface-type switches: provision for back entry (if are intended)		N/A
13.14	Membranes or the like (if provided): replaceable		N/A
13.15	Requirements for membranes in inlet openings		N/A
13.15.1	Membranes, lenses and the like reliably fixed and not displaced by the mechanical and thermal stresses occurring in normal use		N/A
	Test on electronic switches fitted with membranes, lenses and the like subjected to the ageing treatment specified in 15.1:		N/A
	Electronic switches placed at 40 °C ± 2 °C for 2 h; force of 30 N applied for 5 s by means of the tip of test probe 11 of IEC 61032. During these tests: membranes, lenses and the like are not deformed, live parts not accessible		N/A
	Membranes, lenses and the like likely to be subjected to an axial pull: axial pull of 30 N applied for 5 s. During this test: membranes, lenses and the like not come out		N/A
	Test repeated on membranes, lenses and the like not subjected to any treatment		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
13.15.2	Membranes in inlet openings: introduction of the cables into the accessory permitted when the ambient temperature is low		N/A
	Test on membranes not subjected to the ageing treatment specified in 15.1 and fitted with the switches		N/A
	Switches kept at -5 °C for 2 h: possibility to introduce cables of the heaviest type through the membranes		N/A
	After the test: no harmful deformation, cracks or similar damage		N/A
13.16	Flexible cable outlet switches: flexible cable (60245 IEC 66 or 60227 IEC 53, or as specified by the manufacturer) may enter the switch through a suitable hole, groove or gland .....		N/A
	Maximum dimension of flexible cable having conductors specified in table B.1 accepted by the entry:		N/A
	- rated current (A) .....		—
	- cross-sectional area (mm <sup>2</sup> ) (min 1,5 mm <sup>2</sup> ) .....		—
	Entry shaped to prevent damage to the flexible cable		N/A
	Switches intended to be connected via a flexible cable to an electronic extension unit having a rated current equal to the rated current of the electronic switch: flexible cable complies with 60245 IEC 66 or 60227 IEC 53 with a minimum cross sectional area of 0,75 mm <sup>2</sup> .....		N/A
	Switches intended to be connected via a flexible cable to an electronic extension unit having a rated current lower than the rated current of the electronic switch: flexible cable complies with the requirements of 13.103 .....		N/A
	Switches with flexible cable outlet: provided with cable anchorage		N/A
	Cable anchorage: contains the sheath, of insulating material or provided with an insulating lining fixed to the metal parts		N/A
	Cable anchorage: anchor the flexible cable securely to the switch		N/A
	Cable anchorage cannot be released from the outside		N/A
	Use of a special purpose tool not required		N/A
	Screws: not serve to fix any other component, unless		N/A
	- switch is rendered manifestly incomplete if component omitted or replaced in an incorrect position, or		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

	- component cannot be removed without further use of a tool		N/A
	Pull test (30 N, 25 times): cable 60227 IEC 53, cross-sectional area 1,5 mm <sup>2</sup> ; torque (Nm) (2/3 table 3) .....		N/A
	Torque test: torque 0,15 Nm for 1 min, cable not displaced > 2 mm .....		N/A
	Pull test (60 N, 25 times): cable 60245 IEC 66, diameter (mm) of cable; torque (Nm) (2/3 table 3) ...		N/A
	Torque test: torque 0,35 Nm for 1 min, cable not displaced > 2 mm .....		N/A
	Test voltage of 2000 V a.c. applied for 1 min between the conductors and the cord anchorage:		N/A
	During the test: insulation of flexible cable not damaged (no breakdown or flashover)		N/A
13.101	Automatic protective devices incorporated in electronic switches for lamp circuits have at least micro-disconnection		N/A
	Cut-outs in electronic switches for motor speed control circuits: non-self-resetting		N/A
13.102	Electronic switches for the control of the voltage of iron core transformers for extra low-voltage incandescent lamps (for example, halogen): maximum tolerance of the phase-control angle between the positive and negative half-wave of $\pm 2^\circ$ .....		N/A
13.103	TDS shall be of the resetting type		N/A

<b>14</b>	<b>MECHANISM</b>	Built-in type	<b>N/A</b>
	Clause only applicable to electronic switches provided with mechanical switching devices		N/A
14.1	Actuating member of a switch, when released, automatically take up the position corresponding to that of moving contacts		N/A
14.2	Moving contact of switches can come to rest only in "on" and "off" positions		N/A
	Intermediate position permissible if:		N/A
	- it corresponds to the intermediate position of the actuating member, and		N/A
	- the insulation between fixed and moving contacts is adequate. Electric strength test as specified in 16.2: test voltage a.c. for 1 min (V) .....	500 V / 750 V / 1250 V / 2000 V	N/A
14.3	No undue arcing in slowly operation		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test carried out at the end of the test of clause 19.1: breaking of the circuit 10 times, actuating member moved over a period of 2 s. During the test: no sustained arcing		N/A
14.4	Switches of pattern numbers 2, 3, 03 and 6/2 make and break all poles substantially simultaneously		N/A
	Neutral pole of switches of pattern numbers 03 not make after or break before the other poles		N/A
14.5	Action of the mechanism: independent of the presence of cover or cover plate. Test: no flicker		N/A
14.6	Cord-operated switches: effecting a change by application and removal a pull not exceeding:		N/A
	- 45 N applied vertically, and		N/A
	- 65 N applied at $45^\circ \pm 5^\circ$		N/A
14.101	Position indicator used in RCS equipped with an incorporated hand-operated device indicates the position of the switching circuit clearly and without ambiguity		N/A
	TDS equipped with an incorporated hand-operated device and a position indicator is used indicates the position of the switching circuit clearly and without ambiguity		N/A

<b>15</b>	<b>RESISTANCE TO AGEING, PROTECTION PROVIDED BY ENCLOSURES OF SWITCHES, AND RESISTANCE TO HUMIDITY</b>		<b>P</b>
15.1	<b>Resistance to ageing</b>		P
	Switches and boxes placed for 7 days (168 h) in a heating cabinet at $70^\circ\text{C} \pm 2^\circ\text{C}$	70°C, 168 h	P
	- no crack visible after test with normal or corrected vision without additional magnification		P
	- no sticky or greasy material as a result of heat		P
	- no trace of cloth (forefinger pressed with 5 N)		P
	- no other damage as a result of heat		P
15.2	Protection provided by enclosures of switches		P
15.2.1	Protection against access to hazardous parts and against harmful effects due to ingress of solid foreign objects		P
	Enclosure of the switch provides a degree of protection against access to hazardous parts and against harmful effects due to ingress of solid foreign objects in accordance with the IP classification of the switch	IP20	P
	Glands: torque (Nm) (2/3 of torque applied in 20.3)		—

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Screws of the enclosure: torque (Nm) (2/3 table 3) .....		—
15.2.1.1	Protection against access to hazardous parts		N/A
	Appropriate test according to IEC 60529 .....	IP20	P
15.2.1.2	Protection against harmful effects due to ingress of solid foreign objects		N/A
	Appropriate test according to IEC 60529 .....	IP20	P
	Dust not penetrate in quantity to interfere with satisfactory operation or to impair safety		N/A
15.2.2	Protection against harmful effects due to ingress of water		N/A
	Enclosure of switches provide a degree of protection against harmful effects due to ingress of water in accordance with their IP classification		N/A
	Appropriate test according to IEC 60529 .....	IP20	P
	Flush-type and semi-flush-type switches fixed:		N/A
	- in a test wall using an appropriate box in accordance with the manufacturer's instructions		N/A
	- in a test wall according to figure 27		N/A
	Screws of the enclosure: torque (Nm) (2/3 table 3) .....		—
	Glands: torque (Nm) (2/3 of torque applied in table 19) .....		—
	Specimens withstand an electric strength test specified in 16.2 which is started within 5 min of completion of the test		N/A
15.3	<b>Resistance to humidity</b>		P
	Switches proof against humidity which may occur in normal use		P
	Compliance checked by a humidity treatment carried out in a humidity cabinet containing air with relative humidity maintained between 91 % and 95 %.		P
	Specimens kept in the cabinet for:		
	- 2 days (48 h) for switches with IPX0		P
	- 7 days (168 h) for switches with IP>X0		N/A
	After this treatment: specimens show no damage		P

<b>16</b>	<b>INSULATION RESISTANCE AND ELECTRIC STRENGTH</b>		<b>P</b>
16.1	The insulation resistance measured 1 min after application of 500 V d.c.	See appended table 16.1	P
16.2	Electric strength: a.c. test voltage applied for 1 min	See appended table 16.2	P

<b>17</b>	<b>TEMPERATURE RISE</b>		<b>P</b>
17.1	Switches so constructed that the temperature rise in normal use is not excessive		P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

	No oxidation or any other deterioration of contacts, if any		P
	Material and components of electronic switch are not adversely effected by the temperature rise in normal use		P
	During the test:		P
	- electronic switch state not change		P
	- fuses and other protective devices not operate		P
	- permissible temperature rises determined in table 102, column concerning clause 17, not exceeded	See appended table 17	P
	After the test, electronic switch is in operating condition		P
	Sealing compounds, if any, have not flowed		P

<b>18</b>	<b>MAKING AND BREAKING CAPACITY</b>		<b>P</b>
	Electronic switches have adequate making and breaking capacity		P
	Test carried out only on electronic switches provided with mechanically or electromechanically operated contact mechanisms		P
	Contact mechanisms have adequate making and breaking capacity		P
	Test made on three new specimens of the complete contact mechanism		P
	Model/type reference .....	ERC2203-W	—
	Pattern number .....	1	—
	Rated current (A) / Rated load (W or VA) .....	150W	—
	Rated voltage (V) .....	200-240V	—
	Test for electronics switches for the control of:		P
	- fluorescent lamp loads, as specified in 18.1 of part 1;		N/A
	- motor speed control circuits, as specified in 18.1 of part 1 and, additionally, in 18.101;		N/A
	- voltage of iron core transformers for extra low-voltage incandescent lamps, as specified in 18.1, 18.2 of part 1 and, additionally, in 18.102;		N/A
	- voltage of electronic step-down converters for extra low-voltage incandescent lamps, as specified in 18.2 of part 1;		N/A
	- other types of load, as specified in 18.1 and 18.2 of part 1.	incandescent lamp	P
	Rate of operation (operation per minute) .....	30 operations per minute	—

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Electronic switches whose cycle of operation limited by their application: rate of operation specified by the manufacturer (operation per minute) .....	1.5mm <sup>2</sup>	—
	Electronic switches fitted with conductors having nominal cross-sectional area as for the test of clause 17 (mm <sup>2</sup> ) .....		—
18.1	Test with cos $\phi$ 0,3 alternating current		P
	- test voltage (1,1 V <sub>n</sub> ) (V) .....	264V	—
	- test current (1,25 I <sub>n</sub> ) (cos $\phi$ 0,3) (A) .....	1.5A; 0.3	—
	- 200 operations; rate (operations per minute) .....	30 operations per minute	—
	- electronic switches whose rate of operation is limited by their application (for example, heat and light sensors): electronic switch is set to the shortest cycle time possible and re-activated at the end of each cycle within a time of (2 $\pm$ 0,5) s .....	2s	—
	- samples number .....	A,B,C	—
	During the test: no sustained arcing		P
	After the test: specimens show no damage		P
	Test with cos $\phi$ 0,3 alternating current for electronics TDS		N/A
	- test voltage (1,1 V <sub>n</sub> ) (V) .....		—
	- test current (1,25 I <sub>n</sub> ) (cos $\phi$ 0,3) (A) .....		—
	- 200 operations; rate (operations per minute) .....		—
	- electronic TDS whose rate of operation is limited by their application (for example, heat and light sensors): electronic TDS is set to the shortest cycle time possible and re-activated at the end of each cycle within a time of (2 $\pm$ 0,5) s .....		—
	- samples number .....		—
	During the test: no sustained arcing		N/A
	After the test: specimens show no damage		N/A
18.2	Test with tungsten filament lamps load (switches with I <sub>n</sub> $\leq$ 16 A / V <sub>n</sub> $\leq$ 250 V and switches of pattern numbers 3 and 03 with V <sub>n</sub> > 250 V)		N/A
	- test voltage (V <sub>n</sub> ) (V) .....		—
	- test current ( $\geq$ 1,2 I <sub>n</sub> ) (A) .....		—
	- number of 200 W tungsten filament lamps .....		—
	- 200 operations; rate (operations per minute) .....		—
	- samples number .....		—
	During the test: no sustained arcing nor welding of the contacts		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After the test: specimens show no damage		N/A
18.101	Additional test for electronic switches for the control of motor speed control circuits:		N/A
	Rated current $I_n$ (A) of electronic switch ( $\cos\phi$ 0.6) ..... :		—
	Making: 50 cycles with: test current: $9 I_n$ (A); test voltage: $V_n$ (V); $\cos\phi$ $0.8 \pm 0.05$ ..... :		N/A
	Breaking: 50 cycles with: test current: $6 I_n$ (A); test voltage: $V_n$ (V); $\cos\phi$ $0.6 \pm 0.05$ ..... :		N/A
	During the test: no sustained arcing		N/A
	After the test: specimens show no damage		N/A
18.102	Additional test for electronic switches for the control of the voltage of iron core transformers for extra low-voltage incandescent lamps (for example, halogen):		N/A
	- test voltage ( $V_n$ ) (V) ..... :		—
	- 50 making operations in a test circuit adjusted to a test current 10 times $I_n$ (A) for one half-cycle of the power supply frequency ..... :		—
	During the test: no sustained arcing		N/A
	After the test: specimens show no damage		N/A

<b>19</b>	<b>NORMAL OPERATION</b>		<b>P</b>
	Electronic switches withstand the mechanical, electrical and thermal stresses occurring in normal use		P
	Electronic switches whose cycle of operation is limited by their application: rate of operation specified by the manufacturer (operation per minute) ..... :	30 operations per minute	—
	For general purpose electronic switches with included automatic function the number of operations for tests of subclauses 19.101, 19.102 and 19.104 is that specified in the relevant subclause.		—
	If a manufacturer declares a number of operations higher than those indicated in the relevant subclause, the tests shall be made according to declared value.		—
	Electronic RCS withstand without excessive wear or other harmful effect, the mechanical, electrical and thermal stresses occurring in normal use		N/A
	- model/type reference ..... :		—
	- pattern number ..... :		—
	- nominal cross-sectional area per clause 18 ( $\text{mm}^2$ ) ..... :		—

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- test voltage (Vn) (V) .....		—
	- test current (In) (cos φ 0,6) (A) .....		—
	- number of operations per table 17 .....		—
	- rate (operations per minute) .....		—
	- samples number .....		—
	Reduced electric strength per clause 16	See appended table 19.1	P
	Temperature rise test per clause 17 after normal operation	See appended table 19.1	P
	After the tests the specimens not show:		P
	- wear impairing their further use;		P
	- discrepancy between the position of the actuating member (if indicated) and that of the moving contacts		P
	- deterioration of enclosures, insulating lining or barriers;		P
	- seepage of sealing compound		N/A
	- loosening of electrical or mechanical connections;		P
	- displacement of moving contacts of switches pattern number 2, 3, 03 or 6/2		N/A
	No sustained arcing in slowly operation (sub-clause 14.3)		N/A
	RCS equipped with an incorporated hand-operated device acting directly on the switching circuit:		N/A
	- 10 % of operations indicated in table 17 made by hand or in an equivalent manner .....		N/A
	- no sustained arcing in slowly operation (sub-clause 14.3 for a.c. only) .....		N/A
	- control circuit supplied as specified in clause 18 for the remaining 90 % of the operations .....		N/A
	During normal operation test: failures allowed within 1 %; no more than three consecutive failures allowed		N/A
	Electronics TDS withstand without excessive wear or other harmful effect, the mechanical, electrical and thermal stresses occurring in normal use		N/A
	- model/type reference .....		—
	- pattern number .....		—
	- nominal cross-sectional area per clause 18 (mm <sup>2</sup> ) .....		—
	- test voltage (Vn) (V) .....		—

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- test voltage applied to control circuit (rated control voltage) (V) .....		—
	- test current (In) (cos φ 0,6) (A) .....		—
	- adjustable TDS: adjusted delay time (s) .....		—
	- adjusted switching time interval between off and on (s) .....		—
	- number of operations indicated in table 17 (maximum test duration for adjustable and non-adjustable TDS: 1000 h) .....	40000 / 20000 / 10000 / 5000	—
	TDS equipped with an incorporated hand-operated device acting directly on the switching circuit:		N/A
	- 10 % of operations indicated in table 17 made by hand or in an equivalent manner .....		N/A
	- no sustained arcing in slowly operation (sub-clause 14.3 for a.c. only) .....		N/A
	During normal operation test: failures allowed within 1 %; no more than three consecutive failures allowed		N/A
	- samples number .....		—
	Reduced electric strength per clause 16	See appended table 19.1	N/A
	Temperature rise test per clause 17 after normal operation	See appended table 19.1	N/A
	After the tests the specimens not show:		N/A
	- wear impairing their further use;		N/A
	- discrepancy between the position of the actuating member (if indicated) and that of the moving contacts		N/A
	- deterioration of enclosures, insulating lining or barriers;		N/A
	- seepage of sealing compound		N/A
	- loosening of electrical or mechanical connections;		N/A
	- displacement of moving contacts of switches pattern number 2, 3, 03 or 6/2		N/A
	No sustained arcing in slowly operation (sub-clause 14.3)		N/A
19.101	Contact mechanisms intended for incandescent lamp circuits and dimmers for step-down converter; number of operations 40.000:		N/A
	Rate of operation (operation per minute) .....		—
	Rated current (A) / Rated load (W or VA) .....		—
	Rated voltage (V) .....		—
	During the test: specimens function correctly		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	No sustained arcing in slowly operation (sub-clause 14.3)		N/A
	Contact mechanism intended for motor speed control circuits; number of operations 40000:		N/A
	Making: test current: 6 In (A); test voltage: Vn (V); cosφ 0.65 ± 0.05 .....		N/A
	Breaking: test current In (A); test voltage Vn (V); cosφ 0.65 ± 0.05 .....		N/A
	During the test: specimens function correctly		N/A
19.102	Contact mechanisms incorporated in electronic switches, intended for fluorescent lamp circuits or other capacitive loads (for example, electronic ballast) tested according to modified sub-clause 19.2 of part 1, not applicable to dimmers for step-down converter tested according 19.101:		N/A
	- rate of operation (operation per minute) .....	30 (up to and including 10 A) / 15 (10 A to 20 A)	—
	- test voltage (Vn); test current (In) (cos φ 0,9); number of operations with load A .....	- V; - A; 10000 (up to and including 10 A) / 5000 (10 A to 20 A)	N/A
	- test voltage (Vn); 100 operations with load B	- V	N/A
	During the test: copper wire F not melt, specimens function correctly, no sustained arcing or welding of contacts		N/A
19.103	Semiconductor switching devices and/or electronic regulating units incorporated in electronic switches:		N/A
	Rated current (A) / Rated load (W or VA) .....		—
	Rated voltage (V) .....		—
	Test voltage: 1.1 Vn (V) .....		—
	Switch state changed 10 times by means of the sensing surface or unit, or/and		N/A
	Setting value altered 10 times from min to max and back to min by means of the sensing surface or unit		N/A
	Additional test, where appropriate:		N/A
	Switch state changed 10 times by means of an electronic extension unit, and/or		N/A
	Setting value altered 10 times from min to max and back to min by means of an electronic extension unit		N/A
	During the test: specimens operate correctly		N/A
19.104	Mechanical control units incorporate in electronic switches:		P
	Type of mechanical control unit .....	push-button / potentiometer / other requiring manual operation by wireless signal	—

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Rated current (A) / Rated load (W or VA) .....	150W	—
	Rated voltage (V) .....	240V	—
	Test voltage: 1.1 Vn (V) .....	264V	—
	Setting altered 10000 times from min to max and back to min by means of its control unit; rate of operation between 10 and 15 operations per minute.....	10000 times; 15 operations per minute	—
	During the test: specimens function correctly		P
19.105	Electronic switches for which a minimum load or current is specified by the manufacturer:		N/A
	Test current: rated minimum current (A) / rated minimum load (W or VA) .....		—
	Test voltage: 0,9 Vn (V) .....		—
	Switch state changed 10 times over the whole range from min to max and back to min, and/or		N/A
	Setting value altered 10 times over the whole range from min to max and back to min		N/A
	Additional test, where appropriate:		N/A
	Switch state changed 10 times over the whole range from min to max and back to min by means of an electronic extension unit, and/or		N/A
	Setting value altered 10 times over the whole range from min to max and back to min by means of an electronic extension unit		N/A
	During the test: electronic switch functions correctly		N/A
	Reduced electric strength per clause 16	See appended table 19	N/A
	Temperature rise test after normal operation per clause 17:		N/A
	- electronic switch state not change		N/A
	- fuses and other protective devices not operate		N/A
	- permissible temperature rises determined in table 102, column concerning clause 17, not exceeded	See appended table 19	N/A
	After the test, electronic switch is in operating condition		N/A
	Sealing compounds, if any, have not flowed		N/A
	Evaluation of compliance after the normal operation: after the tests the specimens shall not show:		N/A
	- wear impairing their further use;		N/A
	- discrepancy between the position of the actuating member (if indicated) and that of the moving contacts;		N/A
	- deterioration of enclosures, insulating lining or barriers;		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- loosening of electrical or mechanical connections;		N/A
	- seepage of sealing compound;		N/A
	- displacement of the moving contacts of electronic switches of pattern number 2		N/A
19.106	Test for electronic RCS energized by impulses (under no-load conditions):		N/A
	RCS operate as intended at a control voltage between 0,9 and 1,1 times the rated value	See appended table 19.106	N/A
	Electronic TDS operate as intended at the control voltage between 0,9 and 1,1 times the rated value		N/A
	Test (under no-load conditions):		N/A
	- rated control voltage (V) .....		—
	- 20 operations with a control voltage of 0,9 times the rated value (V) .....		—
	- 20 operations with a control voltage of 1,1 times the rated value (V) .....		—
	TDS operated as intended (differences in delay time permitted according to 19.102)		N/A
19.107	Electronic TDS have an adequate repetitive accuracy of delay time		N/A
	Test (under no-load conditions):		N/A
	- rated control voltage (applied ten times) (V) .....		—
	- adjustable TDS: delay time set 2,5 min approximately if possible, otherwise, test made with the delay time specified by the manufacturer (s) .....		—
	Mean value of delay times measured (s) .....	- s	—
	Maximum / minimum values of delay time measured (s) .....	- s / - s	—
	Maximum / minimum values of delay time do not deviate by more than 15 % from the mean value ...	- % / - %	—
19.108	Electronic TDS revert to the full delay time when the operating means is actuated during the delay time period		N/A
	Adjustable TDS: three specimens initiated at rated control voltage and after 1 min initiated again at rated control voltage:		N/A
	- rated control voltage (V) .....		—
	- delay time adjusted between 2 min and 3 min (s) (V) .....		—
	Total delay time resulting for each specimens is between 3 min and 4 min (min) .....		N/A
	Non-adjustable TDS: three specimens initiated at rated control voltage and after 1 min initiated again at rated control voltage:		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- rated control voltage (V) .....		—
	- delay time (declared by the manufacturer) (min) :		—
	Total delay time is the delay time (declared by the manufacturer) $\pm 5\%$ plus 1 min (min) .....		N/A
	Non-adjustable TDS when the delay time is less than 1 min: three specimens initiated at rated control voltage and after half the delay time declared by the manufacturer initiated again at rated control voltage:		N/A
	- rated control voltage (V) .....		—
	- delay time (declared by the manufacturer) (min) :		—
	Total delay time is 1,5 times the delay time (declared by the manufacturer) $\pm 5\%$ (min) .....		N/A

<b>20</b>	<b>MECHANICAL STRENGTH</b>		<b>N/A</b>
	Switches, boxes and screwed glands have adequate mechanical strength	Built-in type	N/A
20.1	For all types of switches and for boxes: impact test (9 blows)	See appended table 20.1	N/A
	After the test: no damage, live parts no become accessible		N/A
20.2	Bases of surface-type switches first fixed to a cylinder of rigid steel sheet of radius equal to 4,5 times the distance between fixing holes (mm) .....		N/A
	Bases then fixed to a flat steel sheet		N/A
	Torque applied to fixing screws (Nm) .....	0,5 Nm / 1,2 Nm	—
	During and after the test: bases show no damage		N/A
20.3	Screwed glands of switches other than ordinary: torque test		N/A
	- diameter of cylindrical metal test rod (mm) .....		—
	- type of material .....	metal / moulded material	—
	- torque for 1 min (table 19) (Nm) .....		—
	After the test: no damage of glands and enclosure of the specimens		N/A
20.4	Force necessary for covers, cover-plates or actuating members to come off or not to come off (accessibility with the test finger to live parts)		N/A
20.4.1	Verification of the non-removal of covers, cover-plates or actuating member		N/A
	Force applied for 1 min in direction perpendicular to the mounting surface .....	40 N / 80 N	—
	Covers, cover-plates or actuating members not come off		N/A
	Test repeated on new specimens with a sheet of hard material, 1 mm $\pm$ 0,1 mm thick, fitted around the supporting frame (fig. 19)		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Covers, cover-plates or actuating members not come off		N/A
	After the test: no damage		N/A
20.4.2	Verification of the removal of covers, cover-plates or actuating members		N/A
	Force not exceeding 120 N applied 10 times in direction perpendicular to the mounting / supporting surface: covers, cover-plates or actuating members come off		N/A
	Test repeated on new specimens with a sheet of hard material, 1 mm $\pm$ 0,1 mm thick, fitted around the supporting frame (fig. 19)		N/A
	Covers, cover-plates or actuating members come off		N/A
	After the test: no damage		N/A
20.5	Force necessary for covers, cover-plates or actuating members to come off or not to come off (accessibility with the test finger to non-earthed metal parts separated from live parts by creepage distances and clearances according to table 20)		N/A
20.4.1	Verification of the non-removal of covers, cover-plates or actuating members		N/A
	Force applied for 1 min in direction perpendicular to the mounting surface .....	10 N / 20 N	—
	Covers or cover-plates not come off		N/A
	Test repeated on new specimens with a sheet of hard material, 1 mm $\pm$ 0,1 mm thick, fitted around the supporting frame (fig. 19)		N/A
	Covers, cover-plates or actuating members not come off		N/A
	After the test: no damage		N/A
20.4.2	Verification of the removal of covers, cover-plates or actuating members		N/A
	Force not exceeding 120 N applied 10 times in direction perpendicular to the mounting / supporting surface: covers, cover-plates or actuating members come off		N/A
	Test repeated on new specimens with a sheet of hard material, 1 mm $\pm$ 0,1 mm thick, fitted around the supporting frame (fig. 19)		N/A
	Covers, cover-plates or actuating members come off		N/A
	After the test: no damage		N/A
20.6	Force necessary for covers, cover-plates or actuating members to come off or not to come off (accessibility to insulating parts, earthed metal parts, live parts of SELV $\leq$ 25 V a.c. or metal parts separated from live parts by creepage distances twice those according to table 20)		N/A
20.4.1	Verification of the non-removal of covers, cover-plates or actuating members		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Force 10 N applied for 1 min in direction perpendicular to the mounting surface: covers, cover-plates or actuating members not come off		N/A
	Test repeated on new specimens with a sheet of hard material, 1 mm $\pm$ 0,1 mm thick, fitted around the supporting frame (fig. 19)		N/A
	Covers, cover-plates or actuating members not come off		N/A
	After the test: no damage		N/A
20.4.2	Verification of the removal of covers, cover-plates or actuating members		N/A
	Force not exceeding 120 N applied 10 times in direction perpendicular to the mounting / supporting surface: covers, cover-plates or actuating members come off		N/A
	Test repeated on new specimens with a sheet of hard material, 1 mm $\pm$ 0,1 mm thick, fitted around the supporting frame (fig. 19)		N/A
	Covers, cover-plates or actuating members come off		N/A
	After the test: no damage		N/A
20.7	Test with gauge of figure 20 applied according to figure 21 for verification of the outline of covers, cover-plates or actuating members: distances between face C of gauge and outline of side under test, not decrease .....	complying / not complying	—
20.8	Test with gauge according to figure 23 applied as shown in figure 24 (1 N): gauge not enter more than 1mm .....	complying / not complying	—
20.9	Operating members of cord-operated switch have adequate strength		N/A
	Pull test: pull 100 N for 1 min (normal use); pull of 50 N for 1 min (unfavourable direction). After the test:		N/A
	- switch show no damage		N/A
	- operating member not broken and cord-operated switch still operate		N/A

<b>21</b>	<b>RESISTANCE TO HEAT</b>	<b>P</b>
21.1	Switches kept for 1 h in a heating cabinet at a temperature of 100 °C $\pm$ 2 °C	P
	During the test: no change impairing their further use and sealing compound, if any, not flow	P
	After the test: no access to live parts, markings still legible	P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
21.2	Parts of insulating material necessary to retain current-carrying parts and parts of the earthing circuit in position: ball-pressure test (1 h, 125 °C)	See appended table 21.2	P
21.3	Parts of insulating material not necessary to retain current-carrying parts and parts of the earthing circuit in position, even though in contact with them: ball-pressure test (1 h)	See appended table 21.3	P

22	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS		P
22.1	Connections withstand mechanical stresses		P
	Thread-forming or thread-cutting screws used only if supplied together with the piece in which they are intended to be inserted		N/A
	Screws and nuts which transmit contact pressure: in engagement with a metal thread	Not screw	N/A
	Threaded part torque test	See appended table 22.1	N/A
22.2	Screws in engagement with a thread of insulating material: correct introduction into the screw hole or nut ensured		N/A
22.3	Contact pressure: not transmitted through insulating material other than ceramic, pure mica or other material no less suitable unless there is sufficient resiliency in metallic parts		P
22.4	Screws and rivets locked against loosening or turning		N/A
22.5	Current-carrying parts of metal having mechanical strength, electrical conductivity and resistance to corrosion adequate:		P
	- copper;	PCB trace	P
	- alloy with at least 58 % copper for parts made from cold-rolled sheet or with at least 50 % copper for other parts;		N/A
	- stainless steel with at least 13 % chromium and not more than 0,12 % carbon		N/A
	- steel with electroplated coating of zinc (ISO 2081): service condition ISO no. (1/2/3); IP (X0/X4/X5); thickness (µm) .....		N/A
	- steel with electroplated coating of nickel and chromium (ISO 1456): service condition ISO no. (2/3/4); IP (X0/X4/X5); thickness (µm) .....		N/A
	- steel with electroplated coating of tin (ISO 2093): service condition ISO no. (2/3/4); IP (X0/X4/X5); thickness (µm) .....		N/A
	Current-carrying parts subjected to mechanical wear: not of steel with electroplated coating		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Metals having a great difference of electrochemical potential: not used in contact with each other		N/A
22.6	Contacts subjected to sliding action: of metal resistant to corrosion		N/A
22.7	Thread-forming screws and thread-cutting screws not used for the connection of current-carrying parts		N/A
	Thread-forming screws and thread-cutting screws used to provide earthing continuity: not necessary to disturb the connection and at least two screws are used for each connection		N/A

<b>23</b>	<b>CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH SEALING COMPOUND</b>		<b>P</b>
	Values of items 1, 2, 6 and 7 of table 20 applied to terminals for external wiring and not applied to other live parts which are protected by a directly associated fuse with adequate breaking capacity or other current-limiting means, under the provision that the requirements of 101 are fulfilled		P
	Electronic switches without directly associated fuse or other current-limiting means: comply with table 20		P
23.1	Creepage distances, clearances and distances through sealing compound no less than the values shown in table 20	See appended table 23.1	P
23.2	Insulating compound: not protrude above the edge of the cavity in which it is contained		N/A
23.101	Electronic switches having control circuit suitable for connection to a SELV supply, the switching circuit being supplied with a voltage greater than the SELV: creepage distances and clearances between the control and switching circuits are not less than 5,5 mm (mm) .....		N/A
	In case of electronic RCS and electronic TDS classified according to 7.103, see the relevant requirements in IEC 60669-2-2 and IEC 60669-2-3 for clearance and creepage between SELV and mains. (mm) .....		N/A
23.102	Wire enamel at least grade 1 according to IEC 60317: clearances between the wire of the control coil, live parts of different polarity and exposed conductive parts may be reduced to a value equal to two-thirds the clearances required in absence of enamel		N/A

<b>24</b>	<b>RESISTANCE OF INSULATING MATERIAL TO ABNORMAL HEAT, TO FIRE AND TO TRACKING</b>		<b>P</b>
-----------	--	--	----------

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
24.1	Parts of insulating material which might be exposed to thermal stresses due to electric effects and the deterioration of which might impair the safety are not unduly affected by abnormal heat and fire		P
24.1.1	Glow-wire test according to IEC 60695-2-1	See appended table 24.1.1	P
24.2	Parts of insulating material retaining live parts in position of switches with IP>X0: of material resistant to tracking		N/A
	Tracking test with solution A of IEC 60112	See appended table 24.2	N/A

<b>25</b>	<b>RESISTANCE TO RUSTING</b>		N/A
	Ferrous parts protected against rusting		N/A
	Test: 10 min in carbontetrachloride, trichloroethane or equivalent degreasing agent, 10 min 10 % solution of ammonium chloride, 10 min in a box with air saturated with moisture and 10 min at 100 °C ± 5 °C:		N/A
	No signs of rust		N/A

<b>26</b>	<b>EMC REQUIREMENTS</b>		<b>P</b>
	Electronic switches designed to operate correctly under the conditions of electromagnetic environment in which they are intended to be used		P
26.1	Immunity		P
	Electronic switches designed so that the switch state (ON or OFF) and/or the setting value are protected against interference		P
	Type of load ..... : incandescent lamp		—
	Test current: In (A) / Rated load (W or VA) ..... : 150W		—
	Test voltage: Vn (V) ..... : 240V		—
	Variation of less than ± 10 % of the value of the output power (rms) is not considered to be a change of setting		P
	Electronic switches tested, if applicable, in the following states (test parameters referred to table 104):		P
	a) in the ON state, highest setting		P
	b) in the ON state, lowest setting		P
	c) in the OFF state		P
26.1.1	Voltage dips and short interruptions		P
	Electronic switch tested using the equipment specified in IEC 61000-4-11 in accordance with table 105: sequence: 3 dips/interruptions (duration: 10 cycles at rated frequency) with interval of 10 s minimum between each test event:		P
	Test level: 0 % U <sub>T</sub>		P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test level: 40 % U <sub>T</sub>		P
	Test level: 70 % U <sub>T</sub>		P
	After the test: electronic switch is in the original state and the setting is unchanged		P
	After the test: the general purpose electronic switch with included automatic functions shall operate as intended.		P
26.1.2	Surge immunity test for 1,2/50 $\mu$ s wave impulses		P
	Test carried out according to IEC 61000-4-5 applying two positive discharges and two negative discharges at each of the following angles 0°, 90°, 270°, at a repetition rate of (60 $\pm$ 5) s, with an open-circuit test voltage of 1 kV (level 2)		P
	After the test: electronic switch is in the original state and the setting is unchanged		P
	After the test: the general purpose electronic switch with included automatic functions shall operate as intended.		P
26.1.3	Electrical fast transient/burst test		P
	Test carried out according to IEC 61000-4-4 in accordance with table 106, duration of the test 1 min +5/0 s for each positive and negative polarities: open-circuit output test voltage ( $\pm$ 10 %):		P
	Supply terminals/terminations: 1 kV		P
	Control terminals/terminations: 0,5 kV		P
	After the test: electronic switch is in the original state and the setting is unchanged		P
	After the test: the general purpose electronic switch with included automatic functions shall operate as intended.		P
26.1.4	Electrostatic discharge test		P
	Electronic switch not intended to operate incandescent lamp: test carried out with only one load of the loads specified within the manufacturer's instructions .....		P
	Test carried out according to EN 61000-4-2 applying 10 positive and 10 negative discharge:		P
	- contact discharge to the conductive surface and to coupling planes (test voltage: 4 kV)		P
	- air discharge at insulating surfaces (test voltage: 8 kV)		P
	After the test: electronic switch is in the original switch state and the setting is unchanged		P
	Alter in the state and/or setting of electronic switches with a sensing surface intended to be operated by touch: possibility to operate the electronic switch as intended		P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After the test: the general purpose electronic switch with included automatic functions shall operate as intended.		P
26.1.5	Radiated electromagnetic field test		P
	Test applicable only to electronic switches containing infra-red (IR) receivers, radio frequency receivers, passive infra-red (PIR) devices, devices containing microprocessors or similar		P
	Test carried out according to IEC 61000-4-3 applying a field strength of 3 V/m in the frequency range 80 MHz to 1000 MHz:		P
	During the test: state of electronic switch is not changed		P
	Flickering of lamps or irregular running of motors due to the switching transient caused by frequency changes of the test equipment during the test procedure is neglected.		P
	After the test: electronic switch is in the original state and the setting is unchanged		P
	Time delay switches (TDS): switch is in the original state after the time delay		N/A
	After the test: the general purpose electronic switch with included automatic functions shall operate as intended.		N/A
26.1.6	Radio-frequency voltage test		P
	Test applicable only to electronic switches containing infra-red (IR) receivers, radio frequency receivers, passive infra-red (PIR) devices, devices containing microprocessors or similar		P
	Test carried out according to IEC 61000-4-6 applying a conducted radio-frequency voltage of 3 V rms. on supply lines and control lines:		P
	During the test: state of electronic switch is not changed		P
	Flickering of lamps or irregular running of motors due to the switching transient caused by frequency changes of the test equipment during the test procedure is neglected.		P
	After the test: electronic switch is in the original state and the setting is unchanged		P
	After the test: the general purpose electronic switch with included automatic functions shall operate as intended.		P
26.1.7	Power-frequency magnetic field test		P
	Test applicable only to electronic switches containing devices susceptible to magnetic fields, for example, Hall elements, electrodynamic microphones, etc.		P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Test carried out according to IEC 61000-4-8 applying a magnetic field of 3 A/m, 50 Hz:		P
	During the test: state of electronic switch is not changed		P
	Flickering of lamps or irregular running of motors due to the switching transient caused by frequency changes of the test equipment during the test procedure is neglected.		P
	After the test: electronic switch is in the original state and the setting is unchanged		P
	After the test: the general purpose electronic switch with included automatic functions shall operate as intended.		P
26.2	Emission		P
26.2.1	Low-frequency emission		P
	Electronic switches designed that they do not cause excessive disturbances in the network		P
	Electronic switch complies with IEC 61000-3-2 and IEC 61000-3-3		P
	Electronic switches with electromechanically operated contact mechanism (for example, a relay) are deemed to meet the requirements of IEC 61000-3-2 without need for testing		P
26.2.2	Radio-frequency emission		P
	Electronic switches designed that they do not cause excessive radio interference		P
	Electronic switch complies with the requirements of CISPR 14		N/A
	Electronic switch complies with the requirements of CISPR 15 (modified on sub-clauses 8.1.3.1 and 8.1.3.2)		P

<b>101</b>	<b>ABNORMAL CONDITIONS</b>		<b>P</b>
	Electronic switches do not create hazard under abnormal conditions		P
101.1.1.1	Fault conditions test: temperature rises not exceed the values given in table 102, column concerning clause 101	See appended table 101.1.1.1	P
	Temperature limited by a fuse: additional test carried out in case of doubt	See appended table 101.1.1.1	N/A
101.1.1.2	Electronic switches without incorporated temperature-limiting devices and without incorporated fuses:		P

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test current: conventional tripping current $I_f$ (A) for 1h of the fuse which, in the installation, will protect the electronic switch .....		—
	Temperature rise measured after steady state or after 4 h .....	See appended table 101.1.1.2	P
	Electronic switches protected by automatic protective devices (including fuses):		N/A
	Current with which the protecting device releases after 1 h (A) .....		—
	Test current: 0.95 times the current with which the protecting device releases after 1 h (A) .....		—
	Temperature rise measured after steady state or after 4 h .....	See appended table 101.1.1.2	N/A
	Electronic switches protected by incorporated fuses complying with IEC 60127:		N/A
	Rated current of incorporated fuse (A) .....		—
	Test current: $2.1 I_n$ (A) .....		—
	Temperature rise measured after 30 min .....	See appended table 101.1.1.2	N/A
101.2	Protection against electric shock even during fault conditions		P
	Electronic switches tested according to clause 10 immediately following the test of 101.1		P
101.3	Short circuit test: prospective short circuit of the supply: 1500 A; $I^2t$ : 15000 A <sup>2</sup> s:		P
	Test voltage $V_n$ (V) .....	240V	—
	Type of fuse recommended by the manufacturer ..	4.7ohm external circuit breaker	—
	N° of short circuits; N° of specimens used .....		—
	During the test: emission of flames or burning particles not occur		P
	After the test:		P
	- accessible metal parts not live	Built-in type	N/A
	- contacts of any incorporated automatic protective device not welded, unless the electronic switch is obviously useless		P
101.4	Abnormal operation of the control circuit (only for electronic RCS energized by impulses)		N/A
	Behaviour of electronic RCS during abnormal operation of the control circuit is not dangerous		N/A
	Test made on three additional specimens of electronic RCS meeting with requirements of clauses 15 and 16:		N/A
	Control circuit continuously energized at its rated voltage (V) .....		—
	Switching circuit loaded for 1 h with rated current (A) at rated voltage (V) .....	- A; - V	—

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After this test:		N/A
	- RCS still operate		N/A
	- temperature rise of any part of the electronic RCS enclosure and plywood support, which may be touched by the standard test finger, test probe B of IEC 61032, $\leq 75$ K (K) .....		N/A
	- temperature rise of the plywood support which cannot be touched by the standard test finger, test probe B of IEC 61032, $\leq 100$ K (K) .....		N/A
	- electronic RCS did not emit flames, melted material, glowing particles or burning drops of insulating material		N/A
	After cooling down to ambient temperature:		N/A
	Electronic RCS withstand a dielectric test (sub-clause 16.2), test voltage (a.c., for 1 min), between switching and control circuits:		N/A
	- test voltage (V) .....		—
	During the test: no flashover or breakdown		N/A
	Electronic RCS still meet the requirements of 10.1		N/A
	Electronic RCS coil is then intermittently energized for 1 h using a voltage equal to its rated control voltage, the switching circuit being supplied with rated current at rated voltage:		N/A
	class of insulating material .....		—
	temperature-rise limit (IEC 60085) (K) .....		—
	temperature-rise measured (K) .....		N/A
	Behaviour of electronic TDS during abnormal operation of the control circuit is not dangerous		N/A
	Test made on three additional specimens of electronic TDS meeting with requirements of clauses 15 and 16:		N/A
	Control circuit continuously energized at its rated voltage (V) .....		—
	Switching circuit loaded for 6 h with rated current (A) at rated voltage (V) .....	- A; - V	—
	Adjustable electronic TDS: adjusted to the shortest delay time (s) .....		—
	After this test:		N/A
	- electronic TDS still operate		N/A
	- temperature rise of any part of the electronic TDS enclosure and plywood support, which may be touched by the standard test finger, test probe B of IEC 61032, $\leq 75$ K (K) .....		N/A
	- temperature rise of the plywood support which cannot be touched by the standard test finger, test probe B of IEC 61032, $\leq 100$ K (K) .....		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- electronic TDS did not emit flames, melted material, glowing particles or burning drops of insulating material		N/A
	After cooling down to ambient temperature:		N/A
	Electronic TDS withstand a dielectric test (sub-clause 16.2), test voltage (a.c., for 1 min), between switching and control circuits:		N/A
	- test voltage (V) .....		—
	During the test: no flashover or breakdown		N/A
	Electronic TDS still meet the requirements of 10.1		N/A

102	COMPONENTS		P
	Components which, if they fail, may impair the safety of the electronic switch comply with the relevant IEC standards, as far as applicable		P
	Components marked with their operating characteristics used in accordance with these markings		P
102.1	Fuses comply with:		N/A
	- IEC 60127		N/A
	- other relevant IEC publications		N/A
	Rated breaking capacity (A): 1500 A or 35 A .....		N/A
102.2	Capacitors: the short-circuiting or disconnection of which cause an infringement of the requirements under fault conditions with regard to shock or fire hazard:		N/A
	Trade mark; article of capacitor .....		—
	Capacitor complies with IEC 60384-14		N/A
	Capacitor passing the damp heat steady-state test		N/A
	specified in 4.12 of IEC 60384-14 with a duration of not less than 21 days are considered acceptable		
	Capacitor in accordance with table 107: approved type of capacitor required by table 107 according to the application in the electronic switch; observed .....		N/A
	Capacitor marked with:		N/A
	- rated voltage (V) .....		N/A
	- rated capacitance (μF) .....		N/A
	- reference temperature (°C) .....		N/A
	Capacitors: the short-circuiting of which cause a current = 0,5 A through the terminals of the capacitor:		N/A
	Trade mark; article of capacitor .....		—
	Capacitor complies with IEC 60384-14		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Capacitor passing the damp heat steady-state test specified in 4.12 of IEC 60384-14 with a duration of not less than 21 days are considered acceptable		N/A
	Capacitor in accordance with table 107: approved type of capacitor required by table 107 according to the application in the electronic switch; observed .....		N/A
	Capacitor marked with:		N/A
	- rated voltage (V) .....		N/A
	- rated capacitance ( $\mu\text{F}$ ) .....		N/A
	- reference temperature ( $^{\circ}\text{C}$ ) .....		N/A
	Capacitors: for suppression of electromagnetic interference:		N/A
	Trade mark; article of capacitor .....		—
	Capacitor complies with IEC 60384-14		N/A
	Capacitor passing the damp heat steady-state test specified in 4.12 of IEC 60384-14 with a duration of not less than 21 days are considered acceptable		N/A
	Capacitor in accordance with table 107: approved type of capacitor required by table 107 according to the application in the electronic switch; observed .....		N/A
	Capacitor marked with:		N/A
	- rated voltage (V) .....		N/A
	- rated capacitance ( $\mu\text{F}$ ) .....		N/A
	- reference temperature ( $^{\circ}\text{C}$ ) .....		N/A
102.3	Resistors: the short-circuiting or interruption of which cause an infringement of the requirements with regard to the protection against fire and electric shock in case of a defect:		N/A
	Manufacturer / characteristics of resistor ..... / $\Omega$		—
	- constant value under overload conditions		N/A
	reference temperature of the resistor according to clause 17 ( $^{\circ}\text{C}$ ) .....		—
	- comply with sub-clause 14.1 of IEC 60065		N/A
102.4	Automatic protective devices (other than fuses)		N/A
	Automatic protective devices comply with IEC 60730 as far as applicable		N/A
102.4.1	Automatic protective devices which switch off the current (cut-outs):		N/A
	Adequate making and breaking capacity		N/A
	Reference temperature above $55^{\circ}\text{C}$ : specimens tested at reference temperature according to clause 17 ( $^{\circ}\text{C}$ ) .....		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
102.4.1.1	Non-self-resetting cut-outs in the load circuit of the electronic switch:		N/A
	Test voltage: 1.1 V <sub>n</sub> (V) .....		—
	Cut-outs in electronic switches for incandescent or fluorescent lamps:		N/A
	10 cycles; test current: 2.1 I <sub>n</sub> (A) of the protecting fuse (IEC 60127) or the conventional fusing current (other fuses) .....		—
	During the test: no sustained arcing		N/A
	After the test: specimens show no damage		N/A
	Electric strength between open contacts: test voltage 500 V a.c. for 1 min		N/A
	Cut-outs in electronic switches for speed control circuits:		N/A
	I <sub>n</sub> (A) of electronic switch (cosφ 0.6) .....		—
	Making: 10 operations with: test current: 9 I <sub>n</sub> (A); cosφ 0.8 ± 0.05 .....		—
	Breaking: 10 operations with: test current: 6 I <sub>n</sub> (A); cosφ 0.6 ± 0.05 .....		—
	During the test: no sustained arcing		N/A
	After the test: specimens show no damage		N/A
	Electric strength between open contacts: test voltage (V): 1200 V a.c. (V <sub>n</sub> ≤ 130 V) or 2000 V (V <sub>n</sub> > 130 V) for 1 min: .....		N/A
102.4.1.2	Self-resetting cut-outs in the load circuit of the electronic switch:		N/A
	Test voltage: 1.1 V <sub>n</sub> (V) .....		—
	Cut-outs in electronic switches for incandescent lamps:		N/A
	200 cycles; test current: 2.1 I <sub>n</sub> (A) of the protecting fuse (IEC 60127) or conventional fusing current (other fuses) .....		—
	During the test: no sustained arcing		N/A
	After the test: specimens show no damage		N/A
	Electric strength between open contacts: test voltage 500 V a.c. for 1 min		N/A
102.4.2	Automatic protective devices which only decrease current to the electronic switch (10 cycles):		N/A
	Test current per clause 17 for 4 h (A) .....		—
	Test current increased to 2.1 I <sub>n</sub> (A) of the protecting fuse (IEC 60127) or the conventional fusing current (other fuses) for 30 min .....		—
	After the test: specimens function correctly		N/A
	Temperature rise test per clause 17:		N/A
	- electronic switch state not change		N/A
	- fuses and other protective devices not operate		N/A

EN 60669-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- permissible temperature rises determined in table 102, column concerning clause 17, not exceeded	See appended table 102.4.2	N/A
	After the test, electronic switch is in operating condition		N/A
	Sealing compounds, if any, have not flowed		N/A
102.5	Transformer		N/A
	Transformers intended for SELV circuits shall be of the safety isolating type and shall comply with the relevant requirements of IEC 61558-2-6.		N/A



中鉴检测  
CCTI TESTING

12.2.5	TABLE: test with apparatus shown in figure 10 (screw terminals)			N/A
	rated current (A) .....			—
	type of conductors .....	rigid solid / rigid stranded		—
	smallest/largest cross-sectional area per table 2 (mm <sup>2</sup> ) .....			—
	number of conductors .....			—
	nominal diameter of thread (mm); torque per table 3 (N.m) .....			—
Cross-sectional area (mm <sup>2</sup> )	Diameter of bushing hole per table 4 (mm)	Height H per table 4 (mm)	Mass (kg)	Remarks
supplementary information:				

12.2.6	TABLE: pull test (screw terminals)			N/A
	rated current (A) .....			—
	smallest/largest cross-sectional area per table 2 (mm <sup>2</sup> ) .....			—
	nominal diameter of thread (mm); torque 2/3 per table 3 (N.m) .....			—
Cross-sectional area (mm <sup>2</sup> )	Number of conductors	Type of conductors (rigid solid / rigid stranded)	Pull per table 5 applied for 1 min (N)	Remarks
supplementary information:				

12.2.7	TABLE: tightening test (screw terminals)			N/A
	rated current (A) .....			—
	nominal diameter of thread (mm); torque 2/3 per table 3 (N.m) .....			—
Largest cross-sectional area per table 2 (mm <sup>2</sup> )	Permissible number of conductors	Type of conductors (rigid solid / rigid stranded)	Number of wires and nominal diameter of wires per table 6	Remarks
supplementary information:				

<b>12.3.10</b>	<b>TABLE: mechanical stresses occurring in normal use</b>			<b>N/A</b>
	rated current (A) .....			—
	largest/smallest cross-sectional area per table 7 (mm <sup>2</sup> ) .....			—
	Number of connection (after that conductor subjected to a pull of 30 N for 1 min) / disconnection	Type of conductor (solid / rigid stranded / flexible)	Cross-sectional area (mm <sup>2</sup> )	Remarks
	<b>TABLE: test with apparatus shown in figure 10</b>			<b>N/A</b>
	rated current (A) .....			—
	type of conductors .....	rigid solid / rigid stranded		—
	smallest/largest cross-sectional area per table 7 (mm <sup>2</sup> ) .....			—
	number of conductors.....			—
	Cross-sectional area (mm <sup>2</sup> )	Diameter of bushing hole per table 4 (mm)	Height H per table 4 (mm)	Mass (kg)
				Remarks
supplementary information:				

12.3.11	TABLE: electrical and thermal stresses occurring in normal use					N/A	
Test a)	Test carried out for 1 h connecting rigid solid conductors:					N/A	
	test current per table 8 (A) .....				—		
	nominal cross-sectional area (mm <sup>2</sup> ) .....				—		
Screwless terminal number		Voltage drop (mV)			Required voltage drop		
1					≤ 15 mV		
2					≤ 15 mV		
3					≤ 15 mV		
4					≤ 15 mV		
5					≤ 15 mV		
Test b)	Temperature cycles test) carried out on terminals subjected to Test a):					N/A	
	test current per table 8 (A) .....				—		
	nominal cross-sectional area (mm <sup>2</sup> ) .....				—		
	allowed voltage drop (mV) .....	≤ 22,5 mV or 2 times 24 <sup>th</sup> cycle value (mV)			—		
Screwless terminal number		1	2	3	4	5	Remarks
voltage drop after 24 <sup>th</sup> cycle							
voltage drop after 48 <sup>th</sup> cycle							

voltage drop after 72 <sup>th</sup> cycle							
voltage drop after 96 <sup>th</sup> cycle							
voltage drop after 120 <sup>th</sup> cycle							
voltage drop after 144 <sup>th</sup> cycle							
voltage drop after 168 <sup>th</sup> cycle							
voltage drop after 192 <sup>th</sup> cycle							
12.3.10	TABLE: mechanical stresses occurring in normal use						
	rated current (A) .....						—
	largest/smallest cross-sectional area per table 7 (mm <sup>2</sup> ) .....						—
Number of connection (after that conductor subjected to a pull of 30 N for 1 min) / disconnection		Type of conductor (solid / rigid stranded / flexible)		Cross-sectional area (mm <sup>2</sup> )		Remarks	
	TABLE: test with apparatus shown in figure 10						N/A
	rated current (A) .....						—
	type of conductors .....				rigid solid / rigid stranded		—
	smallest/largest cross-sectional area per table 7 (mm <sup>2</sup> ) .....						—
	number of conductors.....						—
Cross-sectional area (mm <sup>2</sup> )		Diameter of bushing hole per table 4 (mm)		Height H per table 4 (mm)		Mass (kg)	Remarks
supplementary information:							

12.3.12	<b>TABLE: deflection test (principle of test apparatus shown in figure 11a)</b>						N/A
	Test carried out for 1 h connecting rigid solid conductors:						N/A
	test current (A) (equal rated current) .....						—
	required voltage drop (mV) .....					≤ 25 mV	—
Type of conductor		Smallest			Largest		Remarks
cross-sectional area per table 9 (mm <sup>2</sup> )							
force per table 10 (N)							
screwless terminal number		1	2	3	1	2	3
starting point (X = deflection original point)		X	X+10°	X+20°	X	X+10°	X+20°
voltage drop 1 <sup>st</sup> deflection (mV)							

voltage drop 2 <sup>nd</sup> deflection (mV)							
voltage drop 3 <sup>rd</sup> deflection (mV)							
voltage drop 4 <sup>th</sup> deflection (mV)							
voltage drop 5 <sup>th</sup> deflection (mV)							
voltage drop 6 <sup>th</sup> deflection (mV)							
voltage drop 7 <sup>th</sup> deflection (mV)							
voltage drop 8 <sup>th</sup> deflection (mV)							
voltage drop 9 <sup>th</sup> deflection (mV)							
voltage drop 10 <sup>th</sup> deflection (mV)							
voltage drop 11 <sup>th</sup> deflection (mV)							
voltage drop 12 <sup>th</sup> deflection (mV)							
supplementary information:							

16.1	TABLE: insulation resistance			P
item per table 14	test voltage applied between:	measured (MΩ)	required (MΩ)	
1	Between all poles connected together and the body, with the switch in the "on" position	>10 <sup>3</sup>	5	
2	Between each pole in turn and all other poles connected to the body, with the switch in the "on" position	>10 <sup>3</sup>	2	
3	Between the terminals which are electrically connected together when the switch is in the "on" position, the switch being in the "off" position: micro-gap construction	>10 <sup>3</sup>	2	
supplementary information:				

16.2	TABLE: electric strength			P
item per table 14	test voltage applied between:	test voltage (V)	flashover / breakdown (Yes/No)	
1	Between all poles connected together and the body, with the switch in the "on" position	2000	No	
2	Between each pole in turn and all other poles connected to the body, with the switch in the "on" position	2000	No	
3	Between the terminals which are electrically connected together when the switch is in the "on" position, the switch being in the "off" position: micro-gap construction	1250	No	
supplementary information:				

17	TABLE: temperature rise measurements		P
	cross-sectional area of conductor not less than 1,5 mm <sup>2</sup> (mm <sup>2</sup> ) (table 15) .....	1.5mm <sup>2</sup>	—
	terminal screws: torque (Nm) (2/3 table 3 or appropriate figures 1, 2, 3, 4) .....	--	—
	type of load .....	incandescent lamp	—
	rated current (A) / rated load (W or VA) .....	150W	—
	rated voltage (V) .....	240V	—
	test voltage between 0,9 and 1,1 V <sub>n</sub> (V), whichever is the more unfavourable .....	264V	—
Parts of the electronic switch		Max. measured temperature rise (K)	Permissible temperature rise (K)
L terminal		40.5	55
L1 terminal		21.2	55
S1 terminal		13.4	55
PCB near DB1		63.9	105
C6		23.1	80
C7		25.8	80
PCB near BD1		35.7	105
PCB near U2		37.3	105
PCB near U4		41.4	105
Top enclosure inside on T1		26.9	For reference
bottom enclosure inside on T1		19.4	For reference
Top enclosure outside on T1		21.5	For reference
bottom enclosure outside on T1		16.7	For reference
supplementary information: ambient:25°C			

19	TABLE: reduced electric strength after normal operation		P
Table 14	test voltage applied between:	test voltage (V)	flashover / breakdown (Yes/No)
1	Between all poles connected together and the body, with the switch in the "on" position	1500	No
2	Between each pole in turn and all other poles connected to the body, with the switch in the "on" position	1500	No
3	Between the terminals which are electrically connected together when the switch is in the "on" position, the switch being in the "off" position: micro-gap construction	500	No
supplementary information:			

TABLE: temperature rise measurements after normal operation			P
cross-sectional area of conductor not less than 1,5 mm <sup>2</sup> (mm <sup>2</sup> ) (table 15) .....	1.5mm <sup>2</sup>		—
terminal screws: torque (Nm) (2/3 table 3 or appropriate figures 1, 2, 3, 4).....	--		—
type of load .....	incandescent lamp		—
rated current (A) / rated load (W or VA) .....	150W		—
rated voltage (V) .....	240V		—
test voltage between 0,9 and 1,1 V <sub>n</sub> (V), whichever is the more unfavourable .....	264V		—
Parts of the electronic switch	Max. measured temperature rise (K)	Permissible temperature rise (K)	
L terminal	40.7	55	
L1 terminal	21.7	55	
S1 terminal	14.1	55	
PCB near DB1	64.2	105	
C6	22.8	80	
C7	26.2	80	
PCB near BD1	34.9	105	
PCB near U2	36.7	105	
PCB near U4	42.2	105	
Top enclosure inside on T1	27.6	For reference	
bottom enclosure inside on T1	18.9	For reference	
Top enclosure outside on T1	22.3	For reference	
bottom enclosure outside on T1	17.4	For reference	
supplementary information: ambient: 25°C			

19.106	TABLE: Test for RCS energized by impulses (under no-load conditions):				N/A
	impulse duration declared by the manufacturer .....				—
n. specimen	rated control voltage (V)	control voltage of 0,9 times the rated value (V)	20 operations: RCS operates as intended (Yes/No)	control voltage of 1,1 times the rated value (V)	20 operations: RCS operates as intended (Yes/No)
supplementary information:					

20.1	TABLE: impact test				N/A
part of enclosure tested per table 18 (A, B, C, D)	blows per part	height of fall (mm)	comments		

--	5 blows on cover	--	--
--	4 blows on cover	--	--
supplementary information:			

<b>21.2</b>	<b>TABLE: ball pressure test of thermoplastic materials</b>			<b>N/A</b>
	allowed impression diameter (mm) .....	≤ 2 mm		N/A
part under test	material designation / manufacturer	test temperature (°C)	impression diameter (mm)	
--	--	--	--	
supplementary information:				

<b>21.3</b>	<b>TABLE: ball pressure test of thermoplastic materials</b>			<b>P</b>
	allowed impression diameter (mm) .....	≤ 2 mm		P
part under test	material designation / manufacturer	test temperature (°C) <sup>(1)</sup>	impression diameter (mm)	
Enclosure	--	70	0.7	
supplementary information:				
<sup>(1)</sup> 70 °C / 40 °C + highest temperature rise determined during the test of clause 17				

<b>22.1</b>	<b>TABLE: threaded part torque test</b>					<b>N/A</b>
threaded part identification	diameter of thread (mm)	column number (I, II, or III)	applied torque (Nm)	times (5/10)	no damage	
--	--	--	--	--	--	
supplementary information:						

<b>23.1</b>	<b>TABLE: creepage distances, clearances and distances through sealing compound</b>							<b>P</b>
	rated voltage (V) .....	240V						—
item per table 20	creepage distance dcr, clearance cl and distance through sealing compound dtsc at/of:	required cl (mm)	cl (mm)	required dcr (mm)	dcr (mm)	required dtsc (mm)	dtsc (mm)	
2	Between live parts of different polarity	≥ 3	3	≥ 3	3	≥	--	
supplementary information:								

<b>24.1.1</b>	<b>TABLE: glow-wire test</b>			<b>P</b>
part under test	material designation / manufacturer	test temperature (°C)	remarks	
Enclosure	--	650	No ignition during testing	

supplementary information:

24.2	TABLE: resistance to tracking			N/A
	number of drops .....	50		
part under test	material designation / manufacturer		test voltage (V)	flashover / breakdown (Yes/No)
--	--		--	--
supplementary information:				

101.1.1.1	TABLE: fault conditions test		P
	cross-sectional area of conductor not less than 1,5 mm <sup>2</sup> (mm <sup>2</sup> ) (table 15) .....	1.5mm <sup>2</sup>	—
	terminal screws: torque (Nm) (2/3 table 3 or appropriate figures 1, 2, 3, 4) .....	--	—
	type of load .....	incandescent lamp	—
	rated current (A) / rated load (W or VA) .....	400W	—
	rated voltage (V) .....	240V	—
	test voltage between 0,9 and 1,1 V <sub>n</sub> (V), whichever is the more unfavourable .....	264V	—
fault conditions simulated		remarks	verdict
D2 short circuit		Normal operation, no hazardous	P
C6 short circuit		FU1 open immediately, unrecoverable, no hazardous	P
C7 short circuit		Shutdown immediately, recoverable, no hazardous	P
1-2 of U2 short circuit		Shutdown immediately, recoverable, no hazardous	P
3-2 of U2 short circuit		Shutdown immediately, recoverable, no hazardous	P
3-1 of U2 short circuit		Shutdown immediately, recoverable, no hazardous	P
D4 short circuit		Output shutdown, recoverable, no hazardous	P
C26 short circuit		FU1 open immediately, unrecoverable, no hazardous	P
11-2 of J5 short circuit		Shutdown immediately, recoverable, no hazardous	P
1-2 of Q1 short circuit		relay open immediately, recoverable, no hazardous	P
1-3 of Q1 short circuit		relay open immediately, recoverable, no hazardous	P

3-2 of Q1 short circuit		relay open immediately, recoverable, no hazardous	P
Loaded 12A x 1.45		Temperature rise as below table 101.1.1.2 , no hazardous	P
<b>TABLE: temperature rise measurements</b>			P
temperature measured after (min) .....		--	—
parts of the electronic switch		max. measured temperature rise (K)	permissible temperature rise (K)
--		--	--
<b>TABLE: additional temperature rise measurements in case of temperature limited by a fuse</b>			N/A
current under the relevant fault conditions measured with the fuse short-circuited (A) .....		--	—
type of fuse as specified by IEC 60127 .....		--	—
test duration corresponding to the maximum fusing time corresponding to the current measured (min) :		--	—
parts of the electronic switch		max. measured temperature rise (K)	permissible temperature rise (K)
--		--	--
supplementary information:			

<b>101.1.1.2</b>	<b>TABLE: temperature rise measurements during overload tests</b>		<b>P</b>
	cross-sectional area of conductor not less than 1,5 mm <sup>2</sup> (mm <sup>2</sup> ) (table 15) .....	1.5mm <sup>2</sup>	—
	terminal screws: torque (Nm) (2/3 table 3 or appropriate figures 1, 2, 3, 4) .....	N/A	—
	rated voltage (V) .....	240V	—
	test voltage between 0,9 and 1,1 V <sub>n</sub> (V), whichever is the more unfavourable .....	264V	—
parts of the electronic switch		max. measured temperature rise (K)	permissible temperature rise (K)
L terminal		40.2	55
L1 terminal		22.4	55
S1 terminal		14.9	55
PCB near DB1		63.8	105
C6		22.7	80
C7		25.7	80
PCB near BD1		35.3	105

PCB near U2	36.2	105
PCB near U4	42.8	105
Top enclosure inside on T1	26.8	For reference
bottom enclosure inside on T1	19.2	For reference
Top enclosure outside on T1	22.7	For reference
bottom enclosure outside on T1	18.4	For reference
supplementary information: 30 °C		

102	TABLE: components				P
object/part No.	manufacturer/ trademark	type/model	technical data	compliance to standard	mark(s) of conformity <sup>1)</sup>
PCB	Goldenmax International Technology(Zhuh ai)Ltd.	FR-4	Thickness≥ 1,5mm	UL94	Test with appliance
Capacitance	HUNAN AIHUA GROUP CO.,LTD.	20676987 - CQ.	10V680μ F	IEC/EN 62368- 1	Tested with appliance
Capacitance	HUNAN AIHUA GROUP CO.,LTD.	20676987 - CQ.	400V 6.8μ F	IEC/EN62368-1	Tested with appliance
Plastic enclosure	Dongguan Yihong Tai Plastic Technology Co.,Ltd.	PC940	PC+ABS	UL 94, UL 746C	UL
Internal wire	Various	Various	300V, 105℃, 30AWG, VW-1	UL758	UL

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ATTACHMENT TO TEST REPORT IEC 60669-2-1</b> <b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b> <b>SWITCHES FOR HOUSEHOLD AND SIMILAR FIXED-ELECTRICAL INSTALLATIONS</b> <b>PART 2-1: PARTICULAR REQUIREMENTS - ELECTRONIC SWITCHES</b>			
<b>Differences according</b> ..... : EN 60669-2-1:2004 + A1: 2009 + A12:2010) (used in conjunction with EN 60669-1: 2018)			
<b>Attachment Form No.</b> ..... : EU_GD_IEC60669_2_1F (to be used with Test Report Form No. IEC60669_2_1H)			
<b>Attachment Form Originator</b> ..... : TUV Rheinland			
<b>Master Attachment Form</b> ..... : 2017-12			
<b>Copyright © 2010 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</b>			

<b>8</b>	<b>MARKING</b>		<b>P</b>
8.1 (Annex B)	Paragraph added at the end of this subclause:		N/A
	Flexible cable outlet switches: information of minimum and maximum sizes for which the anchorage is provided put on the switch and/or the packaging unit		P
8.3	First sentence of last paragraph before note 2 replaced by:		P
	Marking is clearly visible with normal or corrected vision, without additional magnification, marked either on the front of the switch or on the inner part of its associated enclosure, or on the main part of the switch so that it is easy legible during installation		P
8.6	First sentence of the first paragraph replaced by:		N/A
	Switches of pattern numbers 2, 3, 03 and switches with $V_n > 250\text{ V}$ and $I_n > 16\text{ A}$ if marked to indicate the switch position: direction of movement of the actuating member to its different positions or the actual switch position, clearly indicated .....		N/A
8.8	Note 2 changed into a requirement and its first sentence replaced by:		P
	Special precautions necessary to take when installing the switch: details of these and clear information given in an instruction sheet which accompanies the switch		P

<b>9</b>	<b>CHECKING OF DIMENSIONS</b>		<b>P</b>
	Paragraph added after the first paragraph:		P
	Type of boxes in which switches are to be mounted: specified in the manufacturer's catalogue		P

<b>10</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK</b>		<b>P</b>
-----------	--	--	----------

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10.1	Additional requirement (IEC 60669-1/A1) concerning switches designed to be fitted with pilot lights supplied at voltage other than ELV is deleted	No pilot light	N/A
10.3	First two line replaced by the following:		N/A
	Accessible parts of switches are made of insulating material	Built-in type	N/A
	“cover or cover plates” replaced by “cover, cover plates and other parts of the enclosure”		N/A
10.3.1	Replaced by:		N/A
	Metal covers, cover plates or other parts of enclosure protected by supplementary insulation made by insulating linings or insulating barriers	No supplementary	N/A
	Insulating linings or insulating barriers:		N/A
	- cannot be removed without being permanently damaged, or designed that		N/A
	- cannot be replaced in an incorrect position; if they are omitted, accessories are rendered inoperable or manifestly incomplete; there is no risk of accidental contact between live parts and metal covers or cover plates; precautions are taken to prevent creepage distances or clearances becoming less than the values specified in clause 23		N/A
10.3.2	Replaced by:		N/A
	Earthing of metal covers, cover plates or other parts of enclosure: connection of low resistance		N/A
<b>11</b>	<b>PROVISION FOR EARTHING</b>		<b>N/A</b>
11.1	Notes 1 and 2 changed into requirements:		N/A
	Requirement did not apply to the metal cover plates mentioned in 10.3.1		N/A
	Small screws and the like, isolated from live parts, for fixing bases, covers or cover plates, were not considered as accessible parts which can become live in the event of an insulation fault		N/A
11.2	Second paragraph replaced by:		N/A
	Earthing terminals have a capacity not less than that of the corresponding terminals for the supply conductors		N/A
<b>12</b>	<b>TERMINALS</b>		<b>N/A</b>
12.2.4	Second paragraph replaced by:		N/A
	Terminals the body of which is made of materials as detailed in 22.5 considered as complying with the requirement		N/A
12.2.5	Paragraph before note 4 deleted		N/A

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

12.2.6	"in case where they exist in the relevant IEC standard" in the last paragraph replaced by "if any, according to HD 21.3		N/A
12.3.1	Present note numbered as note 1 and added new note 2:		N/A
	Tests of 12.3.12 carried out using rigid solid conductors only		N/A

<b>13</b>	<b>CONSTRUCTIONAL REQUIREMENTS</b>		<b>N/A</b>
13.16 (Annex B)	First paragraph replaced by:		N/A
	Flexible cable outlet switches: flexible cable (60245 IEC 66, 60227 IEC 52 or 60227 IEC 53, or as specified by the manufacturer) enter the switch through a suitable hole, groove or gland .....		N/A
	Last but one paragraph replaced:		N/A
	An a.c. voltage of 2000 V applied for 1 min between the conductors and any metal clamp of the cord anchorage		N/A
	During the test: insulation of flexible cable not damaged (no breakdown or flashover)		N/A
	Subclause added at the end:		N/A
	Flexible cable outlet switches:		N/A
	- clear how relief from strain and prevention of twisting is intended to be effected		N/A
	- cord anchorage, or at least part of it, integral with or permanently fixed to one of the component parts of the switch		N/A
	- makeshift methods not used		N/A
	- cord anchorages suitable for different type of flexible cables		N/A
	Rewirable switches with earthing connection are designed with ample space for slack of the earthing conductor		N/A

<b>19</b>	<b>NORMAL OPERATION</b>		<b>N/A</b>
19.102	Paragraph added after the first paragraph:		N/A
	This is not applicable to dimmers for step-down converters as these accessories are tested according to 19.101		N/A

<b>22</b>	<b>SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS</b>		<b>N/A</b>
22.1	Second sentence of the second paragraph deleted		N/A

<b>23</b>	<b>CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH SEALING COMPOUND</b>		<b>N/A</b>
-----------	--	--	------------

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
23.3	Subclause added:		N/A
	Ordinary surface-type switches do not have bare current-carrying strips at the back		N/A
Table 20	Addition of the following NOTE:		N/A
Note 3	Items 101 and 102 apply to electronic RCS and TDS only		N/A
<b>24</b>	<b>RESISTANCE OF INSULATING MATERIAL TO ABNORMAL HEAT, TO FIRE AND TO TRACKING</b>		<b>P</b>
24.1.1	Item b) replaced by:		P
	Parts of insulating material not necessary to retain current-carrying parts and parts of the earthing circuit in position, even though they are in contact with them, and parts of insulating materials necessary to hold in position the earthing terminal in an enclosure, by the test made at a temperature of 650 °C		P
<b>26</b>	<b>EMC REQUIREMENTS</b>		<b>P</b>
	Electronic switches designed to operate correctly under the conditions of electromagnetic environment in which they are intended to be used		P
26.1	Immunity		P
	Electronic switches designed so that the switch state (ON or OFF) and/or the setting value are protected against interference		P
	Type of load ..... incandescent lamp		—
	Test current: $I_n$ (A) / Rated load (W or VA) ..... : 150W		—
	Test voltage: $V_n$ (V) ..... : 240		—
	Electronic switches tested, if applicable, in the following states (test parameters referred to table 104):		P
	a) in the ON state		P
	For electronic switches where the setting can alter (e.g. dimming devices) the electronic switch is set at a firing angle of approx. 90° which results in an output power $P_o$ (r.m.s.).		P
	A variation of $P_o$ less than 10 % is not considered to be a change of the setting.		P
	b) in the OFF state		P
	For the tests with operation, the electronic switch shall be switched ON/OFF with an operation rate of 1 operation/second or less, or the setting value shall be changed e.g. from minimum to maximum		P

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	For electronic switches whose cycle of operation is limited by their application (for example, passive infrared, time delay electronic switches, etc.), the rate of operation during the tests shall be specified by the manufacturer.		P
26.1.1	Voltage dips and short interruptions		P
	Electronic switch tested using the equipment specified in IEC 61000-4-11 in accordance with table 105: sequence: 3 dips/interruptions (duration: 10 cycles at rated frequency) with interval of 10 s minimum between each test event:		P
	Test level: 0 % $U_T$		P
	Test level: 40 % $U_T$		P
	Test level: 70 % $U_T$		P
	The test shall be done on the power supply lines of the electronic switch.		P
	During the test, the electronic switch is not operated.		P
	During the test, the state and setting of the electronic switch may alter, flickering is neglected		P
	After the test, the electronic switch shall be in the original state and setting and shall operate as intended		P
	After the test, the general purpose electronic switch with included automatic functions shall operate as intended		P
26.1.2	Surge immunity test for 1,2/50 $\mu$ s wave impulses		P
	Test carried out according to IEC 61000-4-5 applying two positive discharges and two negative discharges at each of the following angles 0°, 90°, 270°, at a repetition rate of (60 $\pm$ 5) s, with an open-circuit test voltage according to Table 106		P
	During the test, the electronic switch is not operated.		P
	During the test, the state and setting of the electronic switch may alter, flickering is neglected		P
	After the test, the electronic switch shall be in the original state and setting and shall operate as intended		P
	After the test, the general purpose electronic switch with included automatic functions shall operate as intended		P
26.1.3	Electrical fast transient/burst test		P
	Test carried out according to IEC 61000-4-4 in accordance with table 107		P
	During the test, the electronic switch is not operated.		P
	During the test, the state and setting of the electronic switch may alter, flickering caused by the electronic switch is allowed		P

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	After the test, the electronic switch shall be in the original state and setting and shall operate as intended		P
	After the test, the general purpose electronic switch with included automatic functions shall operate as intended.		P
26.1.4	Electrostatic discharge test		P
	Electronic switch not intended to operate incandescent lamp: test carried out with only one load of the loads specified within the manufacturer's instructions .....		P
	Test carried out according to EN 61000-4-2 applying 10 positive and 10 negative discharge:		P
	- contact discharge to the conductive surface and to coupling planes (test voltage: 4 kV)		P
	- air discharge at insulating surfaces (test voltage: 8 kV)		P
	During the test, the electronic switch is not operated.		P
	During the test, the state and setting of the electronic switch may alter, flickering is neglected		P
	After the test, the electronic switch shall be in the original state and setting and shall operate as intended.		P
	After the test, the general purpose electronic switch with included automatic functions shall operate as intended		P
26.1.5	Radiated electromagnetic field test		P
	Test applicable only to electronic switches containing infra-red (IR) receivers, radio frequency receivers, passive infra-red (PIR) devices, devices containing microprocessors or similar		P
	Test is carried out according to EN 61000-4-3 by applying a field strength of 3 V/m in the frequency range 80 MHz to 1 000 MHz and 1 400 Mhz to 2000 MHz with the exception of the exclusion band as defined in the relevant product standard for transmitters, receivers and duplex transceivers		P
	During the test, the electronic switch is operated, if it contains automatic functions or can be remotely controlled		P
	During and after the test, the electronic switch shall operate as intended, flickering is not allowed		P
	Flickering of lamps or irregular running of motors due to switching transients caused by frequency changes of the test equipment during the test procedure is neglected		P

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	After the test, the general purpose electronic switch with included automatic functions shall operate as intended		P
26.1.6	Radio-frequency voltage test		P
	Test applicable only to electronic switches containing infra-red (IR) receivers, radio frequency receivers, passive infra-red (PIR) devices, devices containing microprocessors or similar		P
	Test carried out according to IEC 61000-4-6 applying a conducted radio-frequency voltage of 3 V r.m.s. on supply lines and control lines:		P
	During the test, the electronic switch is operated, if it contains automatic functions or can be remotely controlled.		P
	During and after the test, the electronic switch shall operate as intended, flickering is not allowed		P
	Flickering of lamps or irregular running of motors due to switching transients caused by frequency changes of the test equipment during the test procedure is neglected		P
	After the test, the general purpose electronic switch with included automatic functions shall operate as intended		P
26.1.7	Power-frequency magnetic field test		P
	Test applicable only to electronic switches containing devices susceptible to magnetic fields, for example, Hall elements, electro dynamic microphones, etc.		P
	Test carried out according to IEC 61000-4-8 applying a magnetic field of 3 A/m, 50 Hz:		P
	During the test, the electronic switch is operated, if it contains automatic functions or can be remotely controlled..		P
	During and after the test, the electronic switch shall operate as intended, flickering is not allowed.		P
	Flickering of lamps or irregular running of motors due to switching transients caused by frequency changes of the test equipment during the test procedure is neglected		P
	After the test, the general purpose electronic switch with included automatic functions shall operate as intended		P
26.2	Emission		P
26.2.1	Low-frequency emission		P
	Electronic switches designed that they do not cause excessive disturbances in the network		P
	Electronic switch complies with IEC 61000-3-2 and IEC 61000-3-3		P

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Electronic switches with electromechanically operated contact mechanism (for example, a relay) are deemed to meet the requirements of IEC 61000-3-2 without need for testing. Therefore only the mains supply terminal/terminations of those products shall be tested		P
26.2.2	Radio-frequency emission		P
	Electronic switches designed that they do not cause excessive radio interference		P
	a) Electronic switch complies with the requirements of EN 55014: 2006 (sub clause 8.1.4.1) at the mains terminals		N/A
	b) Electronic switch complies with the requirements of EN 55015: 2006 (sub clause 8.1.4.2) at the load and/or control terminals		P
<b>101</b>	<b>ABNORMAL CONDITIONS</b>		<b>P</b>
101.1.1.2	Addition of the following NOTE:		P
	The tripping current of the protective devices (e.g. fuses, automatic protective devices, etc.) to be used for the verification of electronic switches without incorporated temperature-limiting devices and without incorporated fuses is in accordance with the rated current of the protective device, specified by the manufacturer, intended to protect the electronic switch		P
	Information regarding the protective device which is intended to protect the electronic switch are specified by the manufacturers in the instruction sheets provided with the products		P
<b>102</b>	<b>COMPONENTS</b>		<b>N/A</b>
102.4.1.2	Note replaced by the following test requirement:		N/A
	For cut-outs in electronic switches for fluorescent lamps, the tests are carried out in the same way as for electronic switches for incandescent lamps		N/A
<b>ZB</b>	<b>ANNEX ZB, SPECIAL NATIONAL CONDITIONS</b>		<b>P</b>
7.1.7	BELGIUM, CZECH REPUBLIC, FINLAND, GERMANY, NETHERLANDS, NORWAY, SWEDEN: design B not used due to installation practice		P
8.1	DENMARK: symbol for earth for any space provided for an earthing terminal		N/A
	UNITED KINGDOM: marking of type reference not used		N/A

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
8.3	UNITED KINGDOM: marking of type reference not used		N/A
10.2	DENMARK, NORWAY: accessories requiring earth connection cannot normally be used due to the lack of an earthing conductor in many existing old buildings		N/A
10.3	DENMARK: enclosures, including covers and cover plates, may be made of metal:		N/A
	- for ordinary switches which comply with 10.3.1		N/A
	- for switches with IP>X0 which fulfil with 10.3.1 or 10.3.2		N/A
10.3.2	DENMARK, NORWAY: accessories requiring earth connection cannot normally be used due to the lack of an earthing conductor in many existing old buildings		N/A
10.5	DENMARK, NORWAY: accessories requiring earth connection cannot normally be used due to the lack of an earthing conductor in many existing old buildings		N/A
12.2.5	DENMARK, FINLAND, NORWAY, SWEDEN: - additional test with rigid solid conductors (if exist in relevant IEC standard), if the first test has been made with rigid stranded conductors		N/A
	- in the case rigid stranded conductors do not exist, the test may be made with rigid solid conductors only		N/A
12.2.6	DENMARK, FINLAND, NORWAY, SWEDEN: additional test with one rigid solid conductor and one rigid stranded conductor with same cross-sectional areas connected at same time is required for terminals allowing the connection of two conductors		N/A
13.15.2	DENMARK, FINLAND, NORWAY, SWEDEN, SWITZERLAND: sub-clause mandatory		N/A
13.103	DENMARK, FINLAND, NORWAY, SWEDEN, SWITZERLAND, UNITED KINGDOM: Flexible cables complying with electrical strength test only are not allowed for external use		N/A
101.1.1.2	BELGIUM, FRANCE, SPAIN, SWITZERLAND: Electronic switches designed without an associated incorporated protection are loaded for one hour with the conventional tripping current of the associated protection of the lighting circuit (10 A for fuses and 16 A for CB's) .....		N/A
102.1	UNITED KINGDOM: Fuses according to BS 646 and BS 1362 are deemed to satisfy this requirement .....		N/A

IEC 60669-2-1 ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ZC</b>	<b>ANNEX ZC, A-DEVIATIONS</b>		<b>N/A</b>
11.2	BELGIUM: earthing terminals have a capacity not less than that of corresponding terminals for the supply conductors except that any additional external earthing terminal shall be of a size suitable for conductors of at least 4 mm <sup>2</sup>		N/A
13.103	DENMARK (Stærkstømbekendtgørelsen- Elektriske Installationer 2001, § 521.7.4)		N/A
	The insulation of external flexible cable complies with or is at least electrically and mechanically equivalent to that of flexible cables according to HD 21 or HD 22		N/A
13.103	FINLAND (Electrical Safety Act 410/1996, Degree of Ministry of Trade and Industry No. 1193/99, paragraph 4 Publication S10-2002 of the Finnish Safety Technology Authority, Finnish wiring rules SFS 6000-5-52 (HD 384.5.52), Clause 521, Table 52F)		N/A
	The insulation of external flexible cable complies with or is at least electrically and mechanically equivalent to that of flexible cables according to HD 21 or HD 22		N/A
13.103	NORWAY (DSB: FEL 1998 §28 and §10, NEK 400:2002 Clauses 520.1 and 521.1 and Table 52A)		N/A
	Cables with basic insulation are not accepted as wiring external to the switch. The insulation of external flexible cable complies with or is at least electrically and mechanical equivalent to that of flexible cables according to HD 21 or HD 22		N/A
	Cables complying with the electric strength test only are regarded as internal cables and are accepted to be installed in enclosures, conduits, ducting and trunking systems and the like		N/A
13.103	SWEDEN (ELSÄK-FS: 1999:5, Clauses 520.1 and 521.1 and Table 52-1)		N/A
	Cables with basic insulation are not accepted as wiring external to the switch. The insulation of external flexible cable complies with or is at least electrically and mechanical equivalent to that of flexible cables according to HD 21 or HD 22		N/A
	Cables complying with the electric strength test only are regarded as internal cables and are accepted to be installed in enclosures, conduits, ducting and trunking systems and the like		N/A

## Attachment I

### Photo documentation

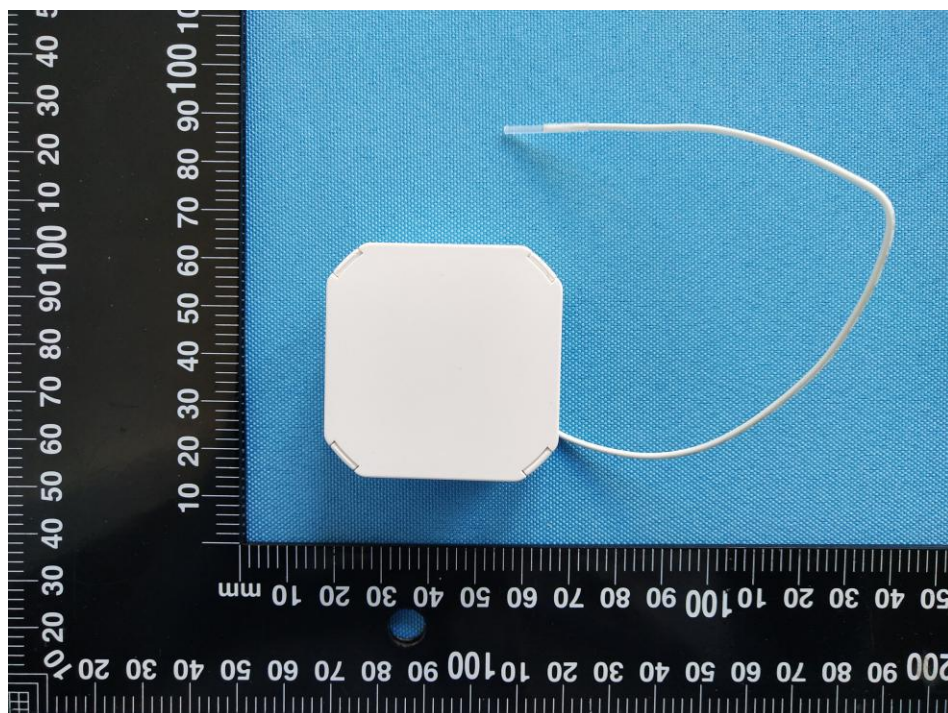


Figure 1 Overall view

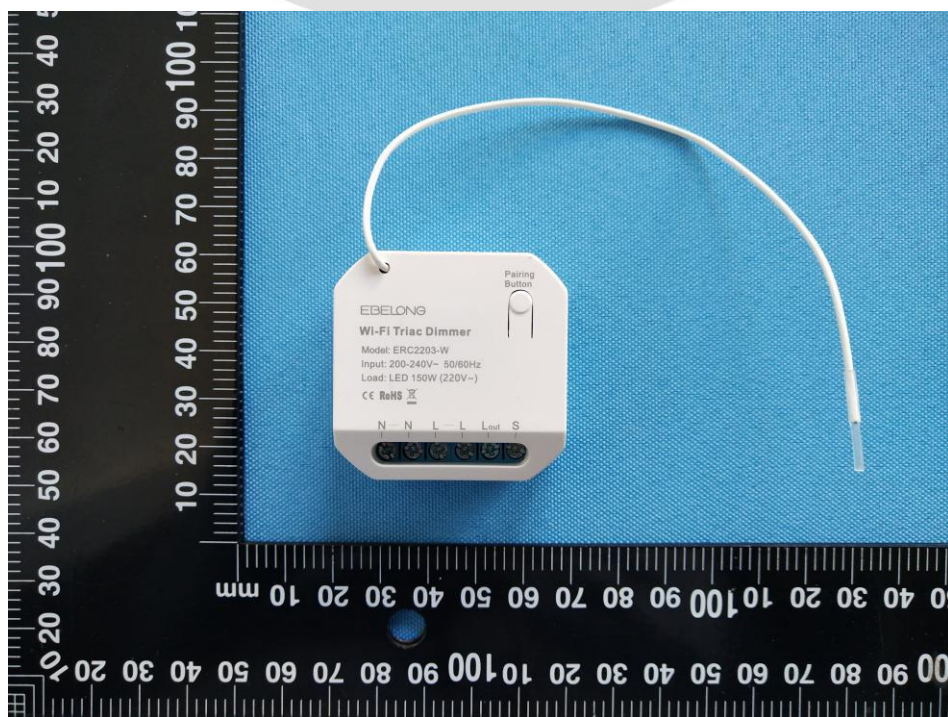


Figure 2 Overall view

Photo documentation

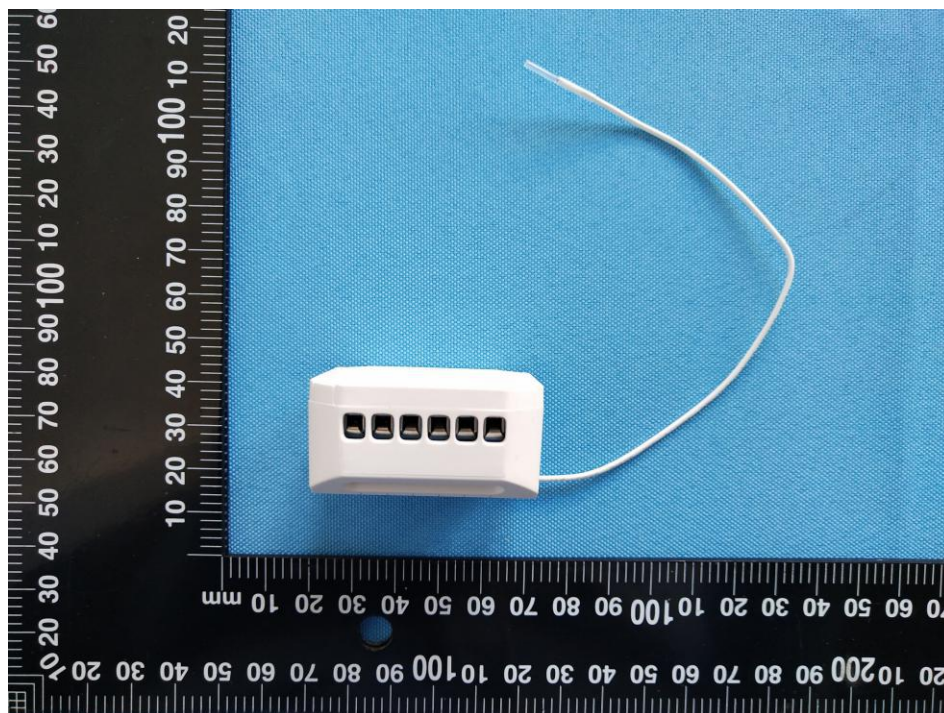


Figure 3 Overall view

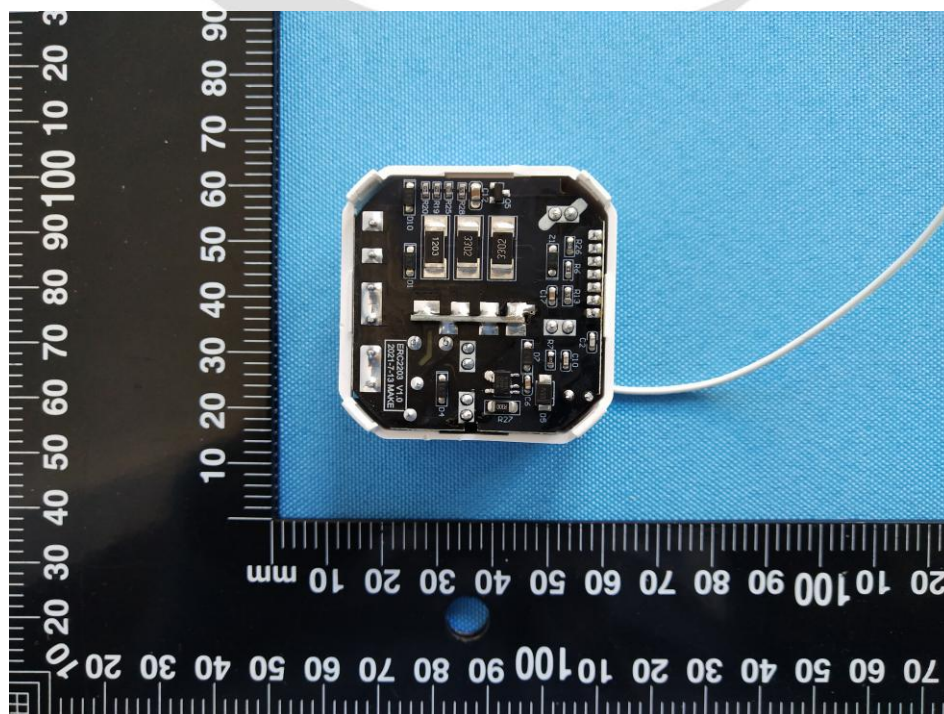


Figure 4 Internal view

Photo documentation

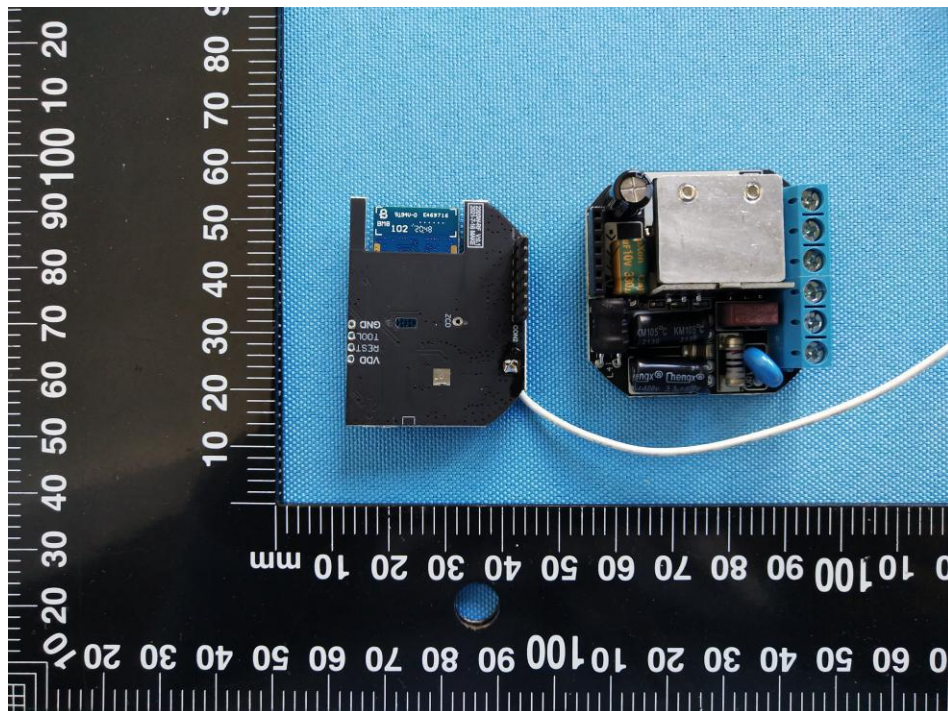


Figure 5 Internal view of PCB

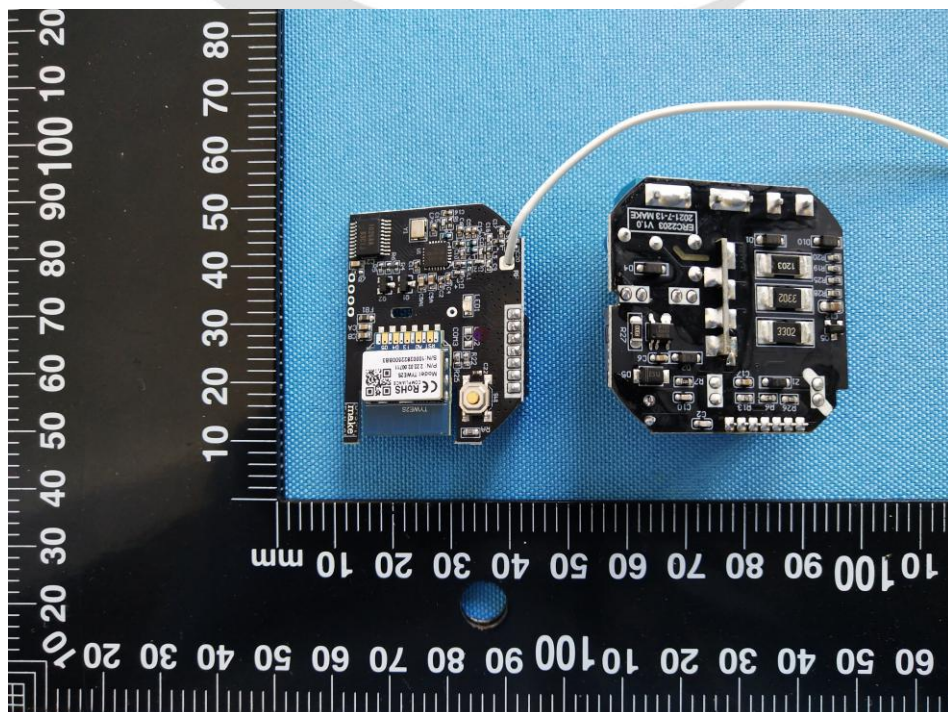


Figure 6 Internal view of PCB

Photo documentation

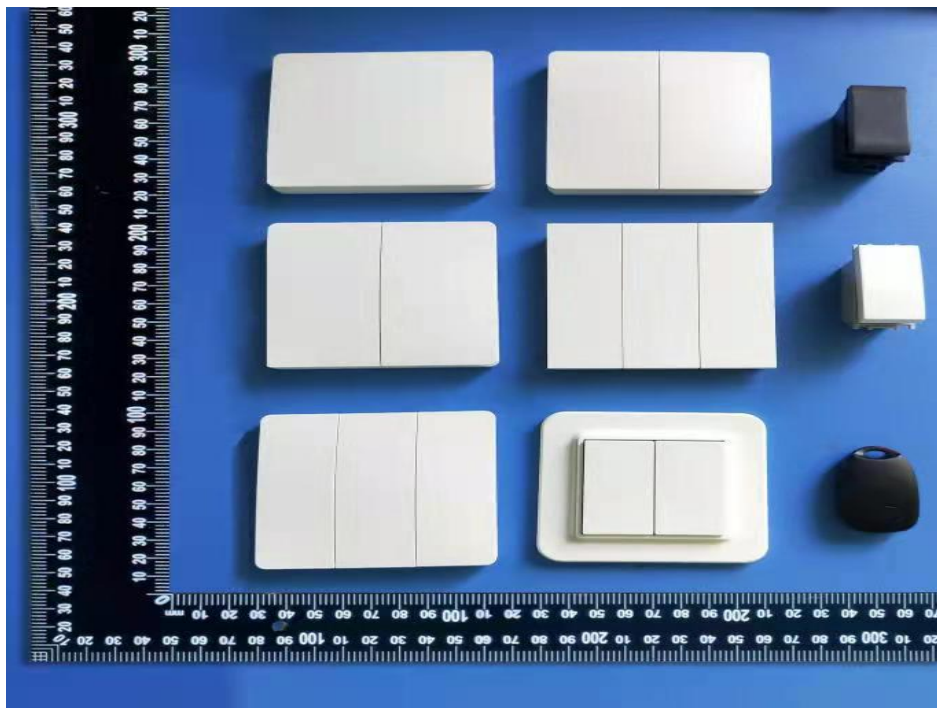


Figure 7 Additional model view

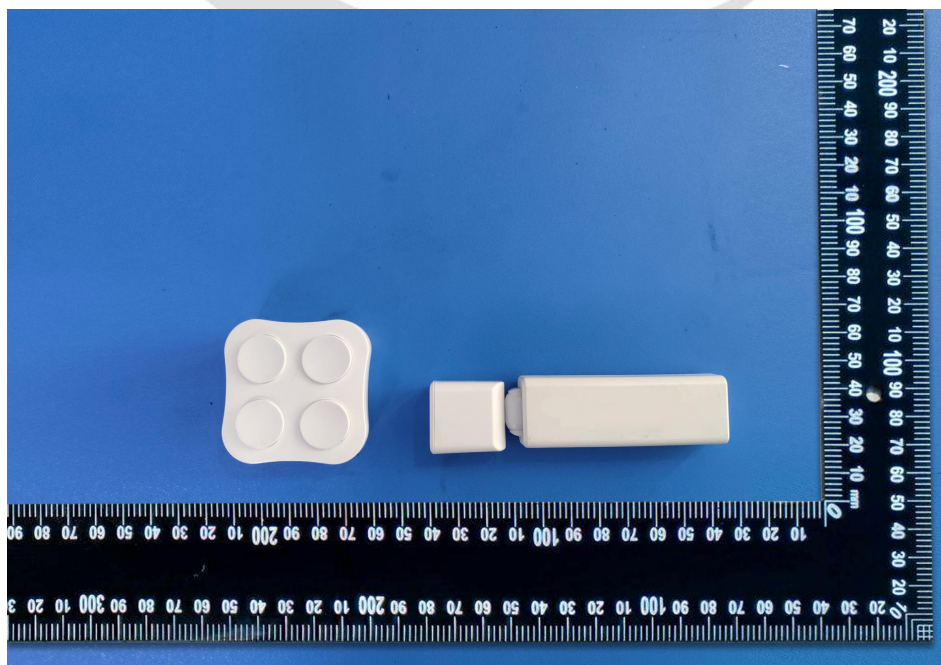


Figure 8 Additional model view

--- End of report ---